


Panasonic®

Air conditioner Installation Instruction



MODEL NO :-
CU-3Z52, 3Z68, 4Z68CBE Series

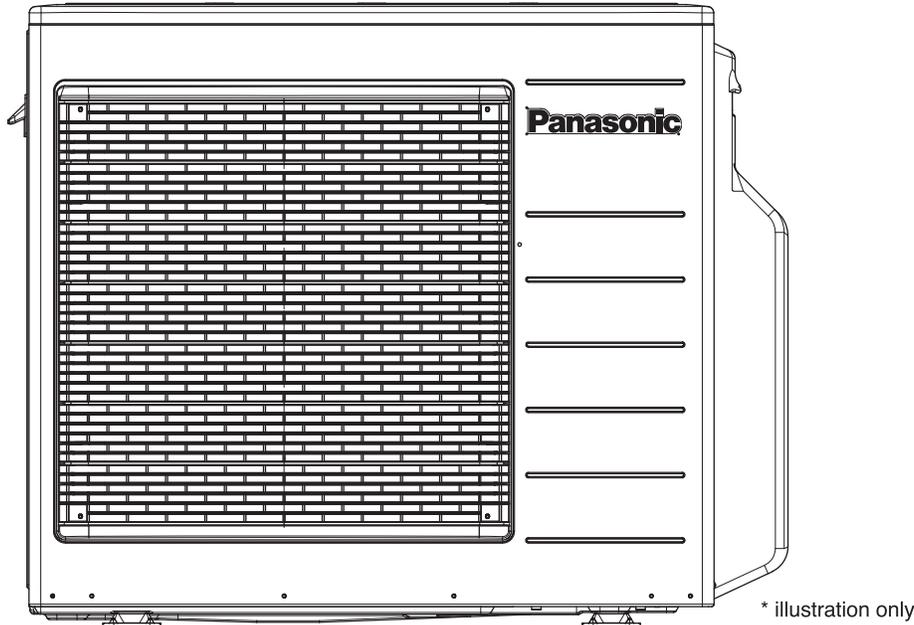

CAUTION

R32 REFRIGERANT

This Air Conditioner contains and operates with refrigerant R32.

THIS PRODUCT MUST ONLY BE INSTALLED OR SERVICED BY QUALIFIED PERSONNEL.

Refer to National, State, Territory and local legislation, regulations, codes, installation & operation manuals, before the installation, maintenance and/or service of this product.

Explanation of symbols displayed on the indoor unit or outdoor unit.



A2L

WARNING

This symbol shows that this equipment uses a mildly flammable refrigerant. If the refrigerant is leaked, together with an external ignition source, there is a possibility of ignition.



CAUTION

This symbol shows that the Installation Manual should be read carefully.



CAUTION

This symbol shows that a service personnel should be handling this equipment with reference to the Installation Manual.

Panasonic will not be responsible for any incident or damage due to improper installation in anyway not described in the detailed manuals. Malfunction caused by incorrect installation is also not covered in product warranty.

ENGLISH

CONTENTS

1. Important	3
1.1 Safety Precautions	3
1.2 Precaution for Using R32 Refrigerant	5
2. General	8
2.1 Required Tools for Installation Works	8
2.2 Attached Accessories	8
2.3 Cutting and Flaring The Piping	8
3. Select the Best Location	9
3.1 Outdoor Unit	9
3.2 Outdoor Unit Installation Diagram	10
4. Outdoor Unit	11
4.1 Install the Outdoor Unit	11
4.2 Connect the Piping	11
4.3 Air Tightness Test on the Refrigerating System	12
4.4 Connect the Cable to the Outdoor Unit	13
4.5 Heat Insulation	14
4.6 Outdoor Unit Drain Water	14
4.7 Pump Down Operation	14
4.8 Cooling Only Operation	14
4.9 Heating Only Operation	15
4.10 Wiring Error Check	15
4.11 In Case Of Reusing Existing Refrigerant Piping	16
4.12 Check Items	16

1. Important

1.1 Safety Precautions

- Read the following “SAFETY PRECAUTIONS” carefully before installation.
- Electrical work must be installed by a licensed electrician. Be sure to use the correct rating of the power plug and main circuit for the model to be installed.
- The caution items stated here must be followed because these important contents are related to safety. The meaning of each indication used is as below. Incorrect installation due to ignoring of the instruction will cause harm or damage, and the seriousness is classified by the following indications.

 WARNING	This indication shows the possibility of causing death or serious injury.
 CAUTION	This indication shows the possibility of causing injury or damage to properties only.

The items to be followed are classified by the symbols:

	Symbol with white background denotes item that is PROHIBITED.
	Symbol with dark background denotes item that must be carried out.

- Carry out test running to confirm that no abnormality occurs after the installation. Then, explain to user the operation, care and maintenance as stated in instructions. Please remind the customer to keep the operating instructions for future reference.

If the equipment is transferred to a new user or delivered to a recycling plant, be sure also to hand over the manual.

 WARNING	
	Do not use means to accelerate the defrosting process or to clean, other than those recommended by the manufacturer. Any unfit method or using incompatible material may cause product damage, burst and serious injury.
	Do not install outdoor unit near handrail of veranda. When installing air-conditioner unit on veranda of a high rise building, child may climb up to outdoor unit and cross over the handrail causing an accident.
	Do not use unspecified cord, modified cord, joint cord or extension cord for power supply cord. Do not share the single outlet with other electrical appliances. Poor contact, poor insulation or over current will cause electrical shock or fire.
	Do not tie up the power supply cord into a bundle by band. Abnormal temperature rise on power supply cord may happen.
	Do not insert your fingers or other objects into the unit, high speed rotating fan may cause injury. 
	Do not sit or step on the unit, you may fall down accidentally. 
	Keep plastic bag (packaging material) away from small children, it may cling to nose and mouth and prevent breathing.  
	When installing or relocating air conditioner, do not let any substance other than the specified refrigerant, eg. air etc mix into refrigeration cycle (piping). Mixing of air etc. will cause abnormal high pressure in refrigeration cycle and result in explosion, injury etc.
	Do not pierce or burn as the appliance is pressurized. Do not expose the appliance to heat, flame, sparks, or other sources of ignition. Else, it may explode and cause injury or death.
	Do not add or replace refrigerant other than specified type. It may cause product damage, burst and injury etc.
	Do not use joint cable for indoor / outdoor connection cable. Use the specified indoor/outdoor connection cable, refer to instruction CONNECT THE CABLE TO THE OUTDOOR UNIT and connect tightly for indoor/outdoor connection. Clamp the cable so that no external force will have impact on the terminal. If connection or fixing is not perfect, it will cause heat up or fire at the connection.
	<ul style="list-style-type: none"> • For R32/R410A model, use piping, flare nut and tools which is specified for R32/R410A refrigerant. Using of existing (R22) piping, flare nut and tools may cause abnormally high pressure in the refrigerant cycle (piping), and possibly result in explosion and injury. For R32 and R410A, the same flare nut on the outdoor unit side and pipe can be used. • Since the working pressure for R32/R410A is higher than that of refrigerant R22 model, replacing conventional piping and flare nuts on the outdoor unit side are recommended. • If reuse piping is unavoidable, refer to instruction “IN CASE OF REUSING EXISTING REFRIGERANT PIPING” • Thickness of copper pipes used with R32/R410A must be more than 0.8 mm (3/4 - 2.0HP), 1.0 mm (2.5HP). Never use copper pipes thinner than 0.8 mm (3/4 - 2.0HP), 1.0 mm (2.5HP). • It is desirable that the amount of residual oil less than 40 mg/10 m.
	Engage authorized dealer or specialist for installation. If installation done by the user is incorrect, it will cause water leakage, electrical shock or fire.
	For refrigeration system work, install according to this installation instructions strictly. If installation is defective, it will cause water leakage, electrical shock or fire.
	Use the attached accessories parts and specified parts for installation. Otherwise, it will cause the set to fall, water leakage, fire or electrical shock.
	Install at a strong and firm location which is able to withstand weight of the set. If the strength is not enough or installation is not properly done, the set will drop and cause injury.
	For electrical work, follow the national regulation, legislation and this installation instructions. An independent circuit and single outlet must be used. If electrical circuit capacity is not enough or defect found in the electrical work, it will cause electrical shock or fire.
	Wire routing must be properly arranged so that control board cover is fixed properly. If control board cover is not fixed perfectly, it will cause

	This equipment is strongly recommended to be installed with Earth Leakage Circuit Breaker (ELCB) or Residual Current Device (RCD), with sensitivity of 30 mA at 0.1 sec or less. Otherwise, it may cause electrical shock and fire in case of equipment breakdown or insulation breakdown.
	During installation, install the refrigerant piping properly before running the compressor. Operation of compressor without fixing refrigeration piping and valves at opened position will cause suck-in of air, abnormal high pressure in refrigeration cycle and result in explosion, injury etc.
	During pump down operation, stop the compressor before removing the refrigeration piping. Removal of refrigeration piping while compressor is operating and valves are opened will cause suck-in of air, abnormal high pressure in refrigeration cycle and result in explosion, injury etc.
	Tighten the flare nut with torque wrench according to specified method. If the flare nut is over-tightened, after a long period, the flare may break and cause refrigerant gas leakage.
	After completion of installation, confirm there is no leakage of refrigerant gas. It may generate toxic gas when the refrigerant contacts with fire.
	Ventilate if there is refrigerant gas leakage during operation. It may cause toxic gas when the refrigerant contacts with fire.
	Be aware that refrigerants may not contain an odour.
	This equipment must be properly earthed. Earth line must not be connected to gas pipe, water pipe, earth of lightning rod and telephone. Otherwise, it may cause electrical shock in case of equipment breakdown or insulation breakdown.
 CAUTION	
	Do not install the unit in a place where leakage of flammable gas may occur. In case gas leaks and accumulates at surrounding of the unit, it may cause fire.
	Prevent liquid or vapor from entering sumps or sewers since vapor is heavier than air and may form suffocating atmospheres.
	Do not release refrigerant during piping work for installation, re-installation and during repairing refrigeration parts. Take care of the liquid refrigerant, it may cause frostbite.
	Do not install this appliance in a laundry room or other location where water may drip from the ceiling, etc.
	Do not touch the sharp aluminium fin, sharp parts may cause injury. 
	Carry out drainage piping as mentioned in installation instructions. If drainage is not perfect, water may enter the room and damage the furniture.
	Select an installation location which is easy for maintenance. Incorrect installation, service or repair of this air conditioner may increase the risk of rupture and this may result in loss damage or injury and/or property.
	Power supply connection to the room air conditioner. Use power supply cord (3 x 2.5 mm ²) type designation 60245 IEC 57 or heavier cord. Connect the power supply cord of the air conditioner to the mains using one of the following method. Power supply point should be in easily accessible place for power disconnection in case of emergency. In some countries, permanent connection of this air conditioner to the power supply is prohibited. 1) Power supply connection to the receptacle using power plug. Use an approved 16 A (CU-3Z52***), 20 A (CU-3Z68***, CU-4Z68***) power plug with earth pin for the connection to the socket. 2) Power supply connection to a circuit breaker for the permanent connection. Use an approved 16 A (CU-3Z52***), 20 A (CU-3Z68***, CU-4Z68***) circuit breaker for the permanent connection. It must be a double pole switch with a minimum 3.0 mm contact gap.
	Installation work. It may need two people to carry out the installation work.
	Keep any required ventilation openings clear of obstruction.

1.2 Precaution for Using R32 Refrigerant

- Pay careful attention to the following precaution points and the installation work procedures.

⚠ WARNING	
❗	The appliance shall be stored, installed and operated in a well ventilated room with indoor floor area larger than A_{\min} (m ²) [refer Table A] and without any continuously operating ignition source. Keep away from open flames, any operating gas appliances or any operating electric heater. Else, it may explode and cause injury or death.
❗	The mixing of different refrigerants within a system is prohibited. Models that use refrigerant R32 and R410A have a different charging port thread diameter to prevent erroneous charging with refrigerant R22 and for safety. Therefore, check beforehand. [The charging port thread diameter for R32 and R410A is 12.7 mm (1/2 inch).]
❗	Ensure that foreign matter (oil, water, etc.) does not enter the piping. Also, when storing the piping, securely seal the opening by pinching, taping, etc. (Handling of R32 is similar to R410A.)
❗	Operation, maintenance, repairing and refrigerant recovery should be carried out by trained and certified personnel in the use of flammable refrigerants and as recommended by the manufacturer. Any personnel conducting an operation, servicing or maintenance on a system or associated parts of the equipment should be trained and certified.
❗	Any part of refrigerating circuit (evaporators, air coolers, AHU, condensers or liquid receivers) or piping should not be located in the proximity of heat sources, open flames, operating gas appliance or an operating electric heater.
❗	The user/owner or their authorized representative shall regularly check the alarms, mechanical ventilation and detectors, at least once a year, where as required by national regulations, to ensure their correct functioning.
❗	A logbook shall be maintained. The results of these checks shall be recorded in the logbook.
❗	In case of ventilations in occupied spaces shall be checked to confirm no obstruction.
❗	Before a new refrigerating system is put into service, the person responsible for placing the system in operation should ensure that trained and certified operating personnel are instructed on the basis of the instruction manual about the construction, supervision, operation and maintenance of the refrigerating system, as well as the safety measures to be observed, and the properties and handling of the refrigerant used.
❗	The general requirement of trained and certified personnel are indicated as below: a) Knowledge of legislation, regulations and standards relating to flammable refrigerants; and, b) Detailed knowledge of and skills in handling flammable refrigerants, personal protective equipment, refrigerant leakage prevention, handling of cylinders, charging, leak detection, recovery and disposal; and, c) Able to understand and to apply in practice the requirements in the national legislation, regulations and Standards; and, d) Continuously undergo regular and further training to maintain this expertise.
❗	Air-conditioner piping in the occupied space shall be installed in such a way to protect against accidental damage in operation and service.
❗	Precautions shall be taken to avoid excessive vibration or pulsation to refrigerating piping.
❗	Ensure protection devices, refrigerating piping and fittings are well protected against adverse environmental effects (such as the danger of water collecting and freezing in relief pipes or the accumulation of dirt and debris).
❗	Expansion and contraction of long runs piping in refrigerating systems shall be designed and installed securely (mounted and guarded) to minimize the likelihood hydraulic shock damaging the system.
❗	Protect the refrigerating system from accidental rupture due to moving furniture or reconstruction activities.
❗	To ensure no leaking, field-made refrigerant joints indoors shall be tightness tested. The test method shall have a sensitivity of 5 grams per year of refrigerant or better under a pressure of at least 0,25 times the maximum allowable pressure. No leak shall be detected.
⚠ CAUTION	
❗	<p>1. General</p> <ul style="list-style-type: none"> • Must ensure the installation of pipe-work shall be kept to a minimum. Avoid use dented pipe and do not allow acute bending. • Must ensure pipe-work shall be securely mounted and guarded from physical damage. • Must comply with national gas regulations, state municipal rules and legislation. Notify relevant authorities in accordance with all applicable regulations. • Must ensure mechanical connections be accessible for maintenance purposes. • In cases that require mechanical ventilation, ventilation openings shall be kept clear of obstruction. • When disposal of the product, do follow to the precautions in #10 and comply with national regulations. • In case of field charge, the effect on refrigerant charge caused by the different pipe length has to be quantified, measured and labelled. Always contact to local municipal offices for proper handling. • Ensure the actual refrigerant charge is in accordance with the room size within which the refrigerant containing parts are installed. • Ensure refrigerant charge not to leak. • Wear appropriate protective equipment, including respiratory protection, as conditions warrant. • Keep all sources of ignition and hot metal surfaces away. • Electrical components that can arc or spark shall only be replaced with parts specified by the appliance manufacturer. Replacement with other parts may result in the ignition of refrigerant in the event of a leak.
❗	<p>2. Servicing</p> <p>2-1. Qualification of workers</p> <ul style="list-style-type: none"> • Any qualified person who is involved with working on or breaking into a refrigerant circuit should hold a current valid certificate from an industry-accredited assessment authority, which authorizes their competence to handle refrigerants safely in accordance with an industry recognized assessment specification. • Servicing shall only be performed as recommended by the equipment manufacturer. Maintenance and repair requiring the assistance of other skilled personnel shall be carried out under the supervision of the person competent in the use of flammable refrigerants. • Servicing shall be performed only as recommended by the manufacturer. • The system is inspected, regularly supervised and maintained by a trained and certified service personnel who is employed by the person user or party responsible.
❗	<p>2-2. Checks to the area</p> <ul style="list-style-type: none"> • Prior to beginning work on systems containing flammable refrigerants, safety checks are necessary to ensure that the risk of ignition is minimised. For repair to the refrigerating system, the precautions in #2-3 to #2-7 must be followed before conducting work on the system.

!	<p>2-3. Work procedure</p> <ul style="list-style-type: none"> Work shall be undertaken under a controlled procedure so as to minimize the risk of a flammable gas or vapour being present while the work is being performed.
!	<p>2-4. General work area</p> <ul style="list-style-type: none"> All maintenance staff and others working in the local area shall be instructed and supervised on the nature of work being carried out. Avoid working in confined spaces. Always ensure away from source, at least 2 meter of safety distance, or zoning of free space area of at least 2 meter in radius.
!	<p>2-5. Checking for presence of refrigerant</p> <ul style="list-style-type: none"> The area shall be checked with an appropriate refrigerant detector prior to and during work, to ensure the technician is aware of potentially flammable atmospheres. Ensure that the leak detection equipment being used is suitable for use with flammable refrigerants, i.e. non sparking, adequately sealed or intrinsically safe. In case of leakage/spillage happened, immediately ventilate area and stay upwind and away from spill/release. In case of leakage/spillage happened, do notify persons down wind of the leaking/spill, isolate immediate hazard area and keep unauthorized personnel out.
!	<p>2-6. Presence of fire extinguisher</p> <ul style="list-style-type: none"> If any hot work is to be conducted on the refrigerating equipment or any associated parts, appropriate fire extinguishing equipment shall be available at hand. Have a dry powder or CO₂ fire extinguisher adjacent to the charging area.
!	<p>2-7. No ignition sources</p> <ul style="list-style-type: none"> No person carrying out work in relation to a refrigerating system which involves exposing any pipe work that contains or has contained flammable refrigerant shall use any sources of ignition in such a manner that it can lead to the risk of fire or explosion. He/She must not be smoking when carrying out such work. All possible ignition sources, including cigarette smoking, should be kept sufficiently far away from the site of installation, repairing, removing and disposal, during which flammable refrigerant can possibly be released to the surrounding space. Prior to work taking place, the area around the equipment is to be surveyed to make sure that there are no flammable hazards or ignition risks. "No Smoking" signs shall be displayed.
!	<p>2-8. Ventilated area</p> <ul style="list-style-type: none"> Ensure that the area is in the open or that it is adequately ventilated before breaking into the system or conducting any hot work. A degree of ventilation shall continue during the period that the work is carried out. The ventilation should safely disperse any released refrigerant and preferably expel it externally into the atmosphere.
!	<p>2-9. Checks to the refrigerating equipment</p> <ul style="list-style-type: none"> Where electrical components are being changed, they shall be fit for the purpose and to the correct specification. At all times the manufacturer's maintenance and service guidelines shall be followed. If in doubt consult the manufacturer's technical department for assistance. The following checks shall be applied to installations using flammable refrigerants. <ul style="list-style-type: none"> The refrigerant charge is in accordance with the room size within which the refrigerant containing parts are installed. The ventilation machinery and outlets are operating adequately and are not obstructed. If an indirect refrigerating circuit is being used, the secondary circuit shall be checked for the presence of refrigerant. Marking to the equipment continues to be visible and legible. Markings and signs that are illegible shall be corrected. Refrigerating pipe or components are installed in a position where they are unlikely to be exposed to any substance which can corrode refrigerant containing components, unless the components are constructed of materials which are inherently resistant to being corroded or are properly protected against being so corroded.
!	<p>2-10. Checks to electrical devices</p> <ul style="list-style-type: none"> Repair and maintenance to electrical components shall include initial safety checks and component inspection procedures. Initial safety checks shall include but not limit to:- <ul style="list-style-type: none"> That capacitors are discharged: this shall be done in a safe manner to avoid possibility of sparking. That there is no live electrical components and wiring are exposed while charging, recovering or purging the system. That there is continuity of earth bonding. At all times the manufacturer's maintenance and service guidelines shall be followed. If in doubt consult the manufacturer's technical department for assistance. If a fault exists that could compromise safety, then no electrical supply shall be connected to the circuit until it is satisfactorily dealt with. If the fault cannot be corrected immediately but it is necessary to continue operation, an adequate temporary solution shall be used. The owner of the equipment must be informed or reported so all parties are advised thereafter.
!	<p>3. Sealed electrical components</p> <ul style="list-style-type: none"> Sealed electrical components shall not be repaired.
!	<p>4. Cabling</p> <ul style="list-style-type: none"> Check that cabling will not be subject to wear, corrosion, excessive pressure, vibration, sharp edges or any other adverse environmental effects. The check shall also take into account the effects of aging or continual vibration from sources such as compressors or fans.
!	<p>5. Detection of flammable refrigerants</p> <ul style="list-style-type: none"> Under no circumstances shall potential sources of ignition be used in the searching or detection of refrigerant leaks. A halide torch (or any other detector using a naked flame) shall not be used. The following leak detection methods are deemed acceptable for all refrigerant systems. <ul style="list-style-type: none"> No leaks shall be detected when using detection equipment with a sensitivity of 5 grams per year of refrigerant or better under a pressure of at least 0,25 times the maximum allowable pressure for example, a universal sniffer. Electronic leak detectors may be used to detect flammable refrigerants, but the sensitivity can be inadequate or can need re-calibration. (Detection equipment shall be calibrated in a refrigerant-free area.) Ensure that the detector is not a potential source of ignition and is suitable for the refrigerant used. Leak detection equipment shall be set at a percentage of the LFL of the refrigerant and shall be calibrated to the refrigerant employed and the appropriate percentage of gas (25 % maximum) is confirmed. Leak detection fluids are also suitable for use with most refrigerants, for example, bubble method and fluorescent agent method. The use of detergents containing chlorine shall be avoided as the chlorine can react with the refrigerant and corrode the copper pipe-work. If a leak is suspected, all naked flames shall be removed/extinguished. If a leakage of refrigerant is found which requires brazing, all of the refrigerant shall be recovered from the system, or isolated (by means of shut off valves) in a part of the system remote from the leak. The precautions in #6 must be followed to remove the refrigerant.

	<p>6. Refrigerant removal and circuit evacuation</p> <ul style="list-style-type: none"> When breaking into the refrigerant circuit to make repairs – or for any other purpose – conventional procedures shall be used. However, for flammable refrigerants, it is important that best practice is followed since flammability is a consideration. The following procedure shall be adhered to: <div style="border: 1px solid black; padding: 5px; margin: 10px 0;"> <ul style="list-style-type: none"> safely remove refrigerant following local and national regulations -> • evacuate -> • purge the circuit with inert gas -> • evacuate -> continuously flush with inert gas when using flame to open circuit -> • open the circuit </div> <ul style="list-style-type: none"> The refrigerant charge shall be recovered into the correct recovery cylinders. The system shall be purged with OFN to render the appliance safe. (remark: OFN = oxygen free nitrogen, type of inert gas) This process may need to be repeated several times. Compressed air or oxygen shall not be used for this task. Purging of the refrigerant circuit shall be achieved by breaking the vacuum in the system with OFN and continuing to fill until the working pressure is achieved, then venting to atmosphere, and finally pulling down to a vacuum. This process shall be repeated until no refrigerant is within the system. The system shall be vented down to atmospheric pressure to enable work to take place. Ensure that the outlet of the vacuum pump is not close to any potential ignition sources and there is ventilation available.
<p>!</p>	<p>7. Charging procedures</p> <ul style="list-style-type: none"> In addition to conventional charging procedures, the following requirements shall be followed. <ul style="list-style-type: none"> Ensure that contamination of different refrigerants does not occur when using charging equipment. Hoses or lines shall be as short as possible to minimize the amount of refrigerant contained in them. Cylinders shall be kept in an appropriate position according to the instructions. Ensure that the refrigerating system is earthed prior to charging the system with refrigerant. Label the system when charging is complete (if not already labelled). Extreme care shall be taken not to overfill the refrigerating system. Prior to recharging the system it shall be pressure tested with OFN (refer to #6). The system shall be leak tested on completion of charging but prior to commissioning. A follow up leak test shall be carried out prior to leaving the site. Electrostatic charge may accumulate and create a hazardous condition when charging and discharging the refrigerant. To avoid fire or explosion, dissipate static electricity during transfer by grounding and bonding containers and equipment before charging/discharging.
<p>!</p>	<p>8. Decommissioning</p> <ul style="list-style-type: none"> Before carrying out this procedure, it is essential that the technician is completely familiar with the equipment and all its details. It is recommended good practice that all refrigerants are recovered safely. Prior to the task being carried out, an oil and refrigerant sample shall be taken in case analysis is required prior to re-use of recovered refrigerant. It is essential that electrical power is available before the task is commenced. <p>a) Become familiar with the equipment and its operation.</p> <p>b) Isolate system electrically.</p> <p>c) Before attempting the procedure ensure that:</p> <div style="border: 1px solid black; padding: 5px; margin: 10px 0;"> <ul style="list-style-type: none"> mechanical handling equipment is available, if required, for handling refrigerant cylinders; all personal protective equipment is available and being used correctly; the recovery process is supervised at all times by a competent person; recovery equipment and cylinders conform to the appropriate standards. </div> <p>d) Pump down refrigerant system, if possible.</p> <p>e) If a vacuum is not possible, make a manifold so that refrigerant can be removed from various parts of the system.</p> <p>f) Make sure that cylinder is situated on the scales before recovery takes place.</p> <p>g) Start the recovery machine and operate in accordance with instructions.</p> <p>h) Do not overfill cylinders. (No more than 80 % volume liquid charge).</p> <p>i) Do not exceed the maximum working pressure of the cylinder, even temporarily.</p> <p>j) When the cylinders have been filled correctly and the process completed, make sure that the cylinders and the equipment are removed from site promptly and all isolation valves on the equipment are closed off.</p> <p>k) Recovered refrigerant shall not be charged into another refrigerating system unless it has been cleaned and checked.</p> <ul style="list-style-type: none"> Electrostatic charge may accumulate and create a hazardous condition when charging or discharging the refrigerant. To avoid fire or explosion, dissipate static electricity during transfer by grounding and bonding containers and equipment before charging/discharging.
<p>!</p>	<p>9. Labelling</p> <ul style="list-style-type: none"> Equipment shall be labelled stating that it has been de-commissioned and emptied of refrigerant. The label shall be dated and signed. Ensure that there are labels on the equipment stating the equipment contains flammable refrigerant.
<p>!</p>	<p>10. Recovery</p> <ul style="list-style-type: none"> When removing refrigerant from a system, either for servicing or decommissioning, it is required to follow good practice so that all refrigerants are removed safely. When transferring refrigerant into cylinders, ensure that only appropriate refrigerant recovery cylinders are employed. Ensure that the correct number of cylinders for holding the total system charge are available. All cylinders to be used are designated for the recovered refrigerant and labelled for that refrigerant (i.e. special cylinders for the recovery of refrigerant). Cylinders shall be complete with pressure relief valve and associated shut-off valves in good working order. Empty recovery cylinders are evacuated and, if possible, cooled before recovery occurs. The recovery equipment shall be in good working order with a set of instructions concerning the equipment that is at hand and shall be suitable for the recovery of the flammable refrigerants. Consult manufacturer if in doubt. In addition, a set of calibrated weighing scales shall be available and in good working order. Hoses shall be complete with leak-free disconnect couplings and in good condition. The recovered refrigerant shall be processed according to local legislation in the correct recovery cylinder, and the relevant Waste Transfer Note arranged. Do not mix refrigerants in recovery units and especially not in cylinders. If compressors or compressor oils are to be removed, ensure that they have been evacuated to an acceptable level to make certain that flammable refrigerant does not remain within the lubricant. The compressor body shall not be heated by an open flame or other ignition sources to accelerate this process. Draining of oil from a system shall be carried out safely.

2. General

2.1 Required Tools for Installation Works

Required tools for Installation Works						
1	Phillips screw driver	6	Pipe cutter	11	Thermometer	16 Torque wrench 18 N•m (1.8 kgf•m) 42 N•m (4.3 kgf•m) 55 N•m (5.6 kgf•m) 65 N•m (6.6 kgf•m) 100 N•m (10.2 kgf•m)
2	Level gauge	7	Reamer	12	Megameter	
3	Electric drill, hole core drill (ø70 mm)	8	Knife	13	Multimeter	
4	Hexagonal wrench (4 mm)	9	Gas leak detector	14	Vacuum pump	
5	Spanner	10	Measuring tape	15	Gauge manifold	

2.2 Attached Accessories

Outdoor unit

No.	Accessories part	Qty.
1	Drain elbow 	1

2.3 Cutting and Flaring The Piping

- Please cut using pipe cutter and then remove the burrs.
- Remove the burrs by using reamer. If burrs is not removed, gas leakage may be caused.
Turn the piping end down to avoid the metal powder entering the pipe.
- Please make flare after inserting the flare nut onto the copper pipes.





1. To cut



2. To remove burrs



3. To flare

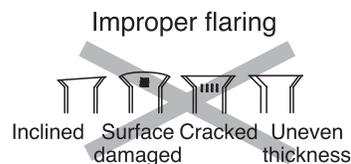

When properly flared, the internal surface of the flare will evenly shine and be of even thickness. Since the flare part comes into contact with the connections, carefully check the flare finish.

3. Select the Best Location

3.1 Outdoor Unit

- If an awning is built over the unit to prevent direct sunlight or rain, be careful that heat radiation from the condenser is not obstructed.
- There should not be any animal or plant which could be affected by hot air discharged.
- Keep the spaces indicated by arrows from wall, ceiling, fence or other obstacles.
- Do not place any obstacles which may cause a short circuit of the discharged air.

Table A

Model	Maximum Total Piping Length to Add Gas (m)	Additional Refrigerant (g/m)	Max. Refrigerant Charge (kg)	Wall Mounted Indoor Amin (m²)	Mini Cassette Indoor Amin (m²)	Ducted Indoor Amin (m²)
CU-3Z52***	30	20	2.32	5.60	4.58	4.58
CU-3Z68***	30	20	2.85	7.68	5.63	5.63
CU-4Z68***	30	20	2.85	7.68	5.63	5.63

(*) Systems with total refrigerant charge, m_c , lower than 1.84 kg are not subjected to any room area requirements.

- If total piping length of all indoor units exceed the maximum total length listed above, additionally charge with 20 g of refrigerant (R32) for each additional meter of piping.

$$A_{min} = (m_c / (2.5 \times (LFL)^{(5/4)} \times h_0))^2$$

** not less than concentration factor margin

A_{min} = Required minimum room area, in m²

m_c = Refrigerant charge in appliance, in kg

LFL = Lower flammability limit (0.307 kg/m³)

h_0 = Installation height of the appliance (1.8 m for wall mounted)
(2.2 m for mini cassette and ducted)


CF = Concentration factor with a value of 0.75

**The required minimum room area, A_{min} , shall also be governed by the concentration factor margin formula below :

$$A_{min} = m_c / (CF \times LFL \times h_0)$$

The higher value shall be taken when determining the room area.

Allowable piping length				
Outdoor Unit			CU-3Z52***	CU-3Z68***, CU-4Z68***
Allowable piping length of each indoor unit (min. ~ max.)			3 m ~ 25 m	3 m ~ 25 m
Allowable total piping length of all indoor unit			50 m or less	60 m or less
Height difference between indoor and outdoor unit	Outdoor unit located on upper side	Ⓐ	15 m or less	15 m or less
	Outdoor unit located otherwise	Ⓑ	7.5 m or less	7.5 m or less
Height difference between indoor unit	Outdoor unit located on upper side	Ⓒ	7.5 m or less	7.5 m or less
	Outdoor unit located otherwise	Ⓓ	15 m or less	15 m or less

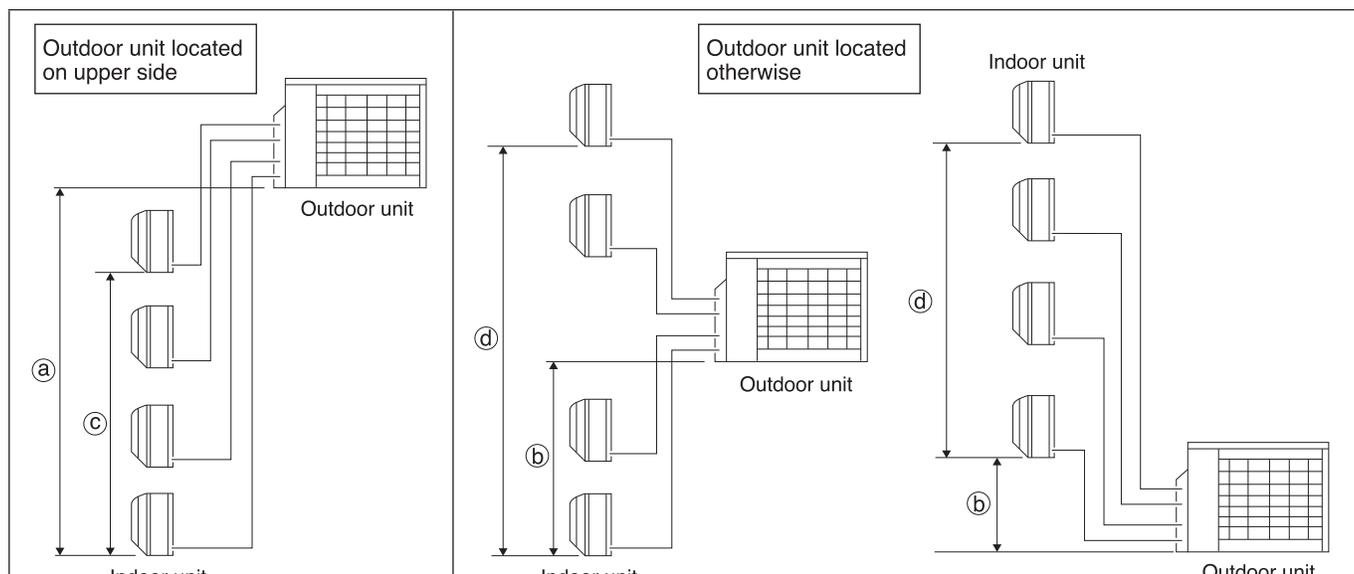


3.2 Outdoor Unit Installation Diagram

Refrigerant piping size		
Outdoor Unit	CU-3Z52***	CU-3Z68***, CU-4Z68***
Liquid - side	ø 6.35 t0.8	ø 6.35 t0.8
Gas - side	ø 9.52 t0.8	ø 9.52 t0.8 *(ø 12.7 t0.8)

* In case of indoor is CS-Z60***, CS-TZ60***, S-60***, then ø 12.7 t0.8 gas-pipe size must be used together with CZ-MA2PA (pipe size expander)


Attention:
Water droplet will be formed outside the base pan due to the temperature difference. We would recommend installer to apply **insulators onto the refrigerant pipes** and 2,3-way valve in order to minimize the amount of condensate accumulated inside the base pan which cause the temperature difference.

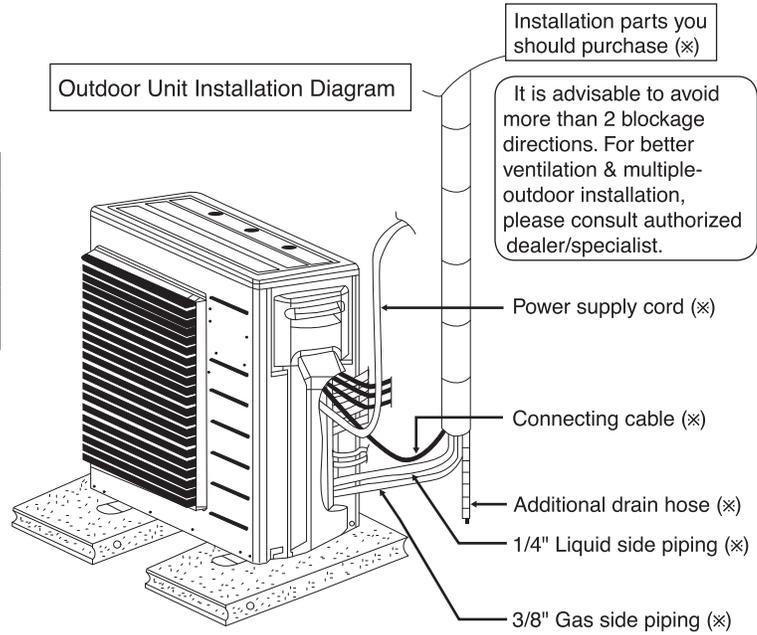

- This illustration is for explanation purposes only.
- * Note:
Respective indoor unit installation procedure shall refer to instruction manual provided in the indoor unit packaging.

Outdoor Unit Installation Guidelines

- Where a wall or other obstacle is in the path of outdoor unit's intake or exhaust airflow, follow the installation guidelines below.
- For any of the below installation patterns, the wall height on the exhaust side should be 1200 mm or less.

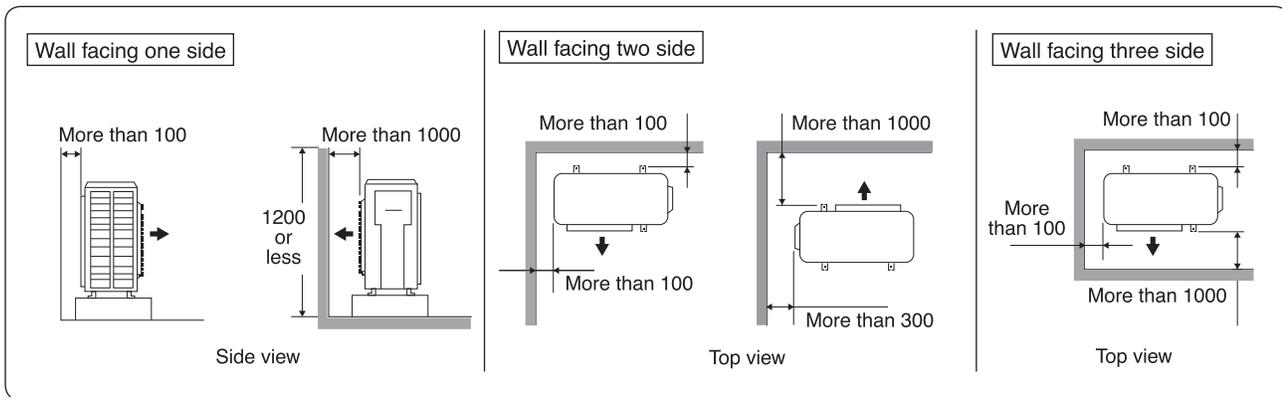


Unit : mm

4. Outdoor Unit

4.1 Install the Outdoor Unit

- After selecting the best location, start installation according to Indoor/Outdoor Unit Installation Diagram.
- Fix the unit on concrete or rigid frame firmly and horizontally by bolt nut ($\phi 10$ mm).
- When installing at roof, please consider strong wind and earthquake.
Please fasten the installation stand firmly with bolt, screws or nails.

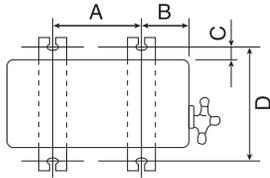

Model	A	B	C	D
CU-3Z52***, CU-3Z68***, CU-4Z68***	613 mm	131 mm	24 mm	360.5 mm

4.2 Connect the Piping

- Remove the control board cover (resin) from the unit by loosening three screws.

Connecting The Piping to Outdoor


Decide piping length and then cut by using pipe cutter. Remove burrs from cut edge.

Make flare after inserting the flare nut (locate at valve) onto the copper pipe. Align center of piping to valve and then tighten with torque wrench to the specified torque as stated in the table.

⚠ CAUTION

⊘ Do not over tighten, overtightening may cause gas leakage.

Piping size	Torque
1/4" (6.35 mm)	[18 N•m (1.8 kgf•m)]
3/8" (9.52 mm)	[42 N•m (4.3 kgf•m)]
1/2" (12.7 mm)	[55 N•m (5.6 kgf•m)]
5/8" (15.88 mm)	[65 N•m (6.6 kgf•m)]
3/4" (19.05 mm)	[100 N•m (10.2 kgf•m)]

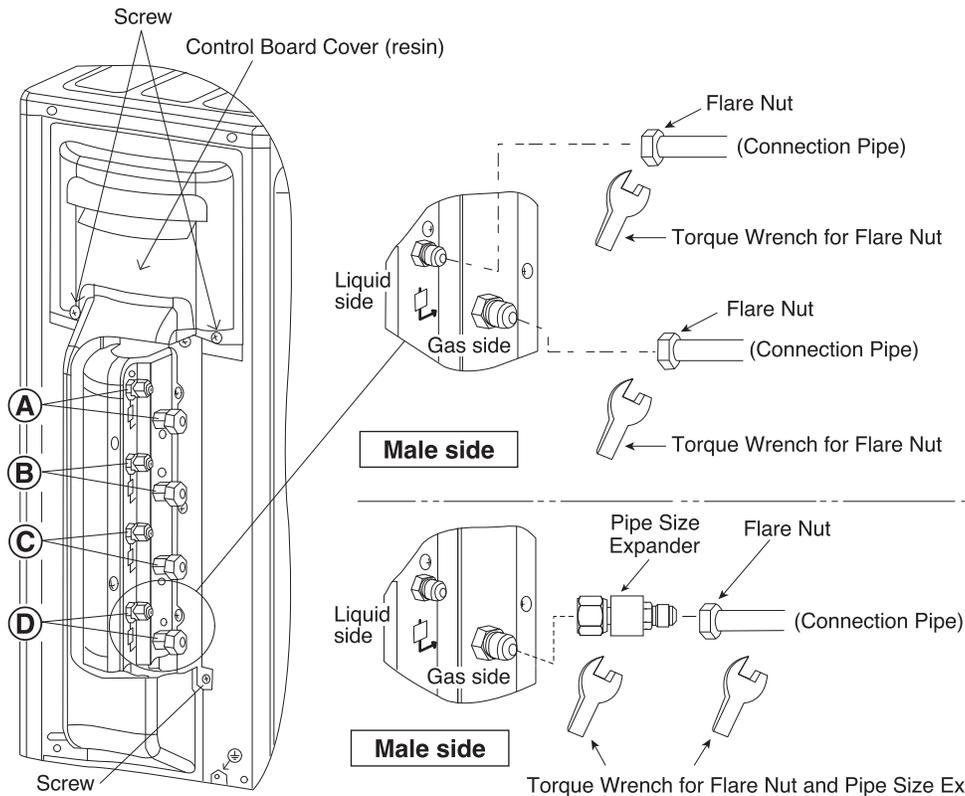

Female side

Applicable to
Liquid and Gas side of
CS-MZ16***, CS-MZ20***,
CS-MTZ16***, CS-Z20***,
CS-Z25***, CS-Z35***,
CS-Z42***, CS-Z50***,
CS-XZ20***, CS-XZ25***,
CS-XZ35***, CS-XZ42***,
CS-XZ50***, CS-TZ20***,
CS-TZ25***, CS-TZ35***,
CS-TZ42***, CS-TZ50***,
CS-RZ25***, CS-RZ35***,
CS-RZ50***, S-M20***,
S-25***, S-36***, S-50***

Liquid side of
CS-Z60***, CS-TZ60***,
S-60***

Female side


Applicable to
Gas side of CS-Z60***,
CS-TZ60***, S-60***

AIR PURGING METHOD IS PROHIBITED FOR R32 SYSTEM

4.3 Air Tightness Test on the Refrigerating System

- ⊘ Do not purge the air with refrigerants but use a vacuum pump to vacuum the installation.
- ❗ There is no extra refrigerant in the outdoor unit for air purging.

- Before system is charged with refrigerant and before the refrigerating system is put into operation, below site test procedure and acceptance criteria shall be verified by the certified technicians, and/or the installer.
- Be sure to check whole system for gas leakage.

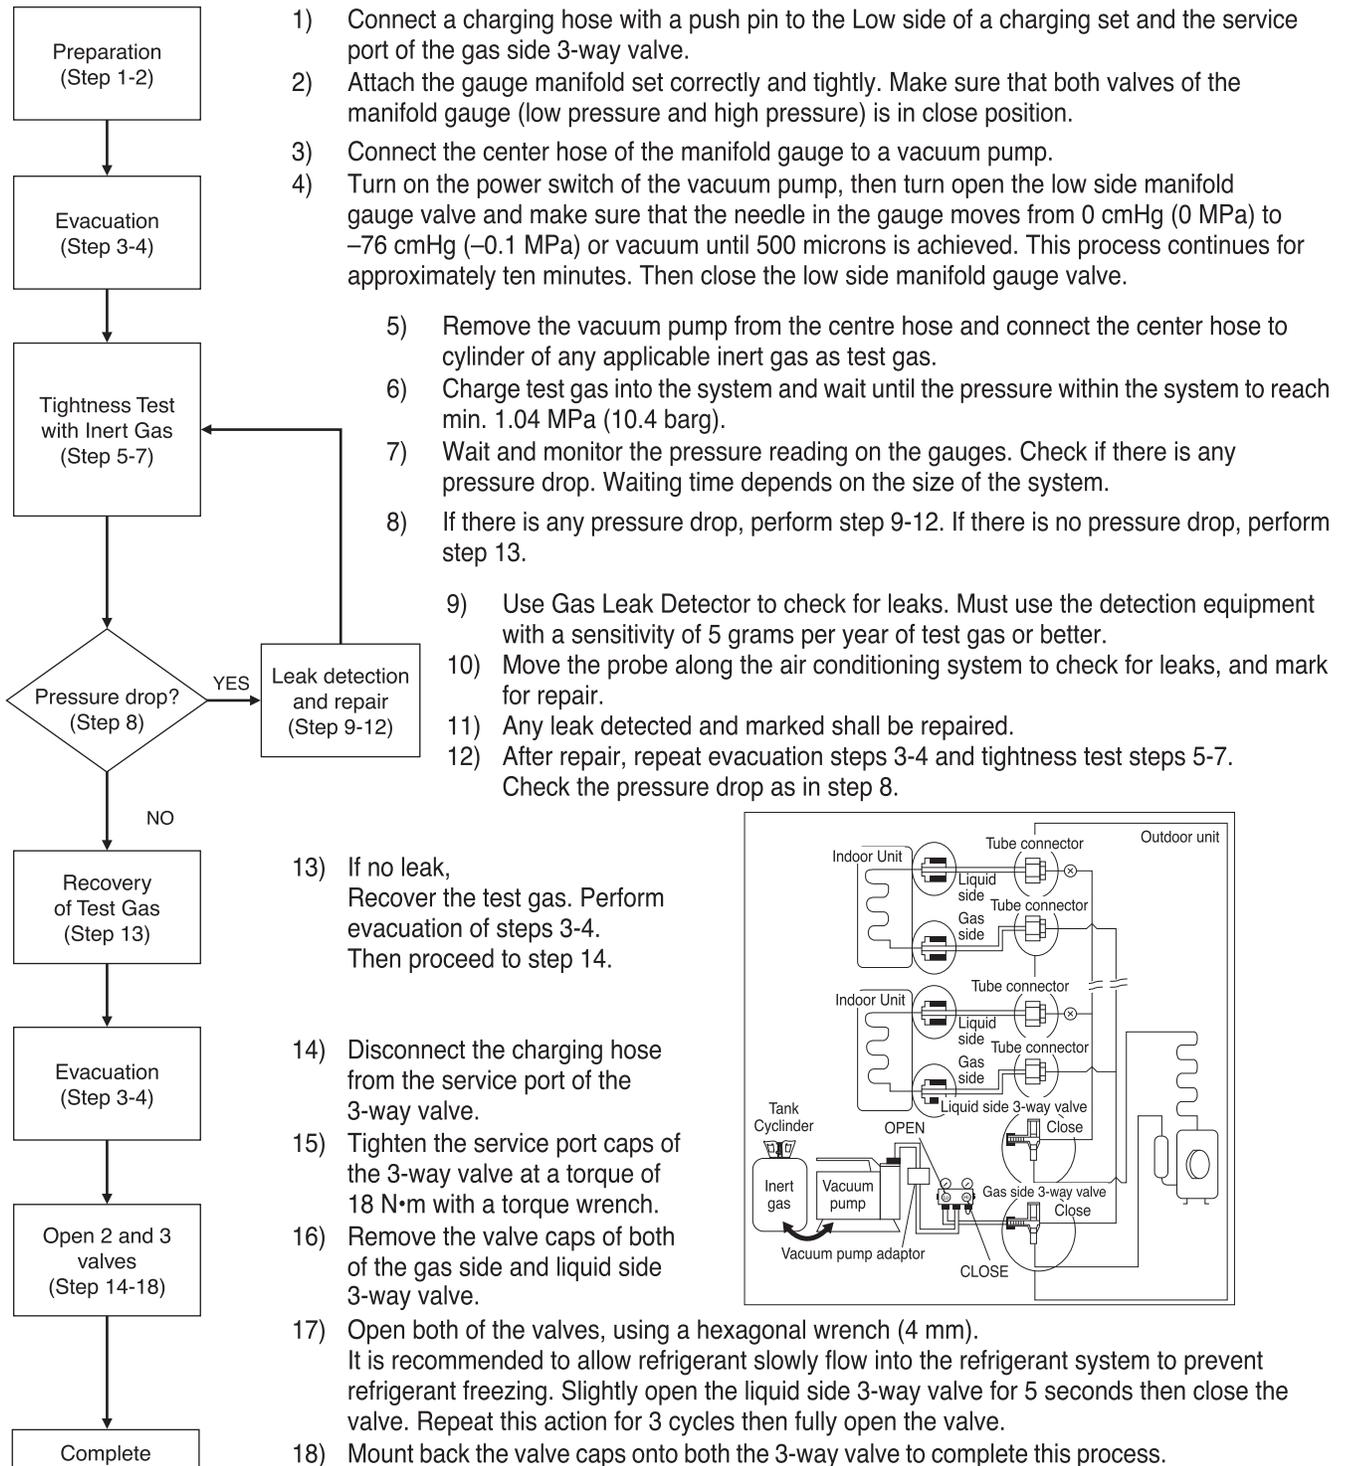


Notes:

Recommended use of any of the following leak detector,


- I) Universal Sniffer leak detector
- II) Electronic halogen leak detector
- III) Ultrasonic Leak Detector

4.4 Connect the Cable to the Outdoor Unit


- Remove the control board cover metal from the unit by loosening two screws.
- Cable connection to the power supply through isolating Devices (Disconnecting means).
 - Connect approved type polychloroprene sheathed **power supply cord** 3 x 2.5 mm² 60245 IEC 57 type designation or heavier cord to the terminal board, and connect the others end of the cord to Isolating Devices (Disconnecting means).
- Connection cable** between indoor unit and outdoor unit shall be approved polychloroprene sheathed 4 x 1.5 mm² flexible cord, type designation 60245 IEC 57 or heavier cord. Allowable connection cable length of each indoor unit shall be 30 m or less.
- Connect the power supply cord and connecting cable between indoor unit and outdoor unit according to the diagram as shown.

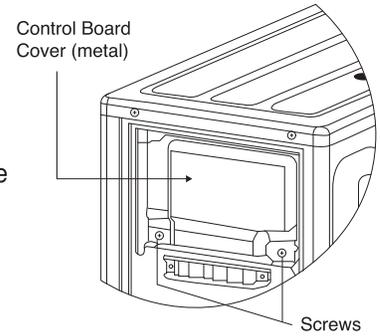


CU-3Z52***, CU-3Z68***

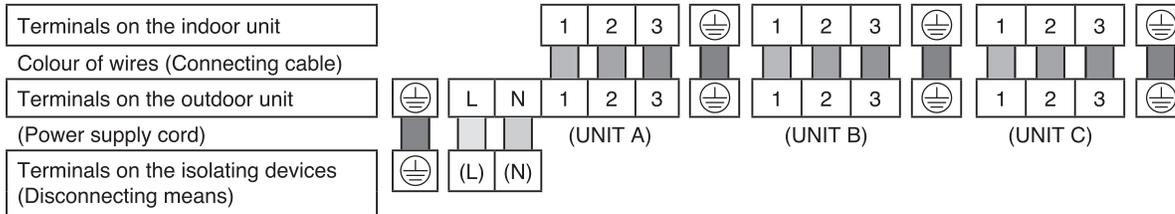


CU-4Z68***

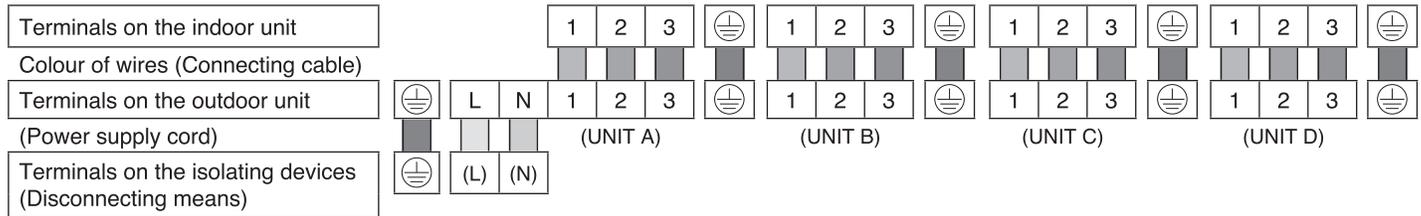

CU-3Z52***, CU-3Z68***

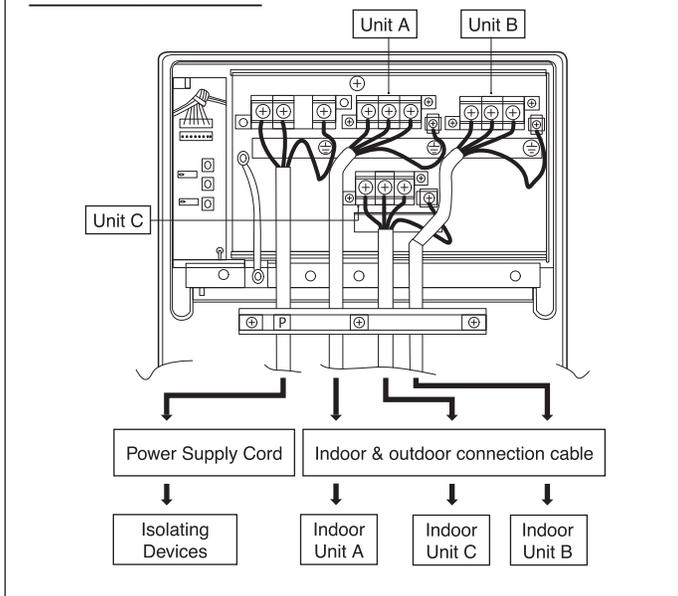


CU-4Z68***

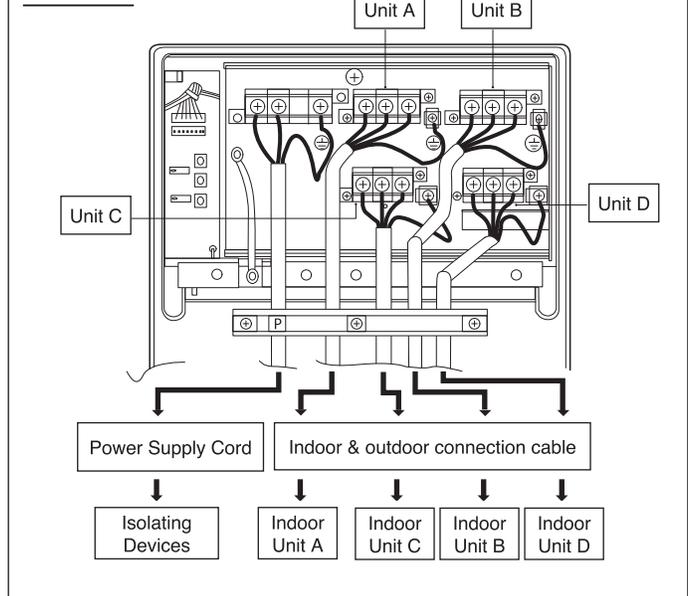

- For wire stripping and connection requirement, refer to the diagram below.
- Secure the power supply cord and connecting cables onto the control board with the holder.
- Attach the control board cover back to the original position with screw.

WIRE STRIPPING AND CONNECTING REQUIREMENT

Wire stripping




Indoor/outdoor connecting terminal board

5 mm or more (gap between wires)

Conductor fully inserted



Conductor over inserted



Conductor not fully inserted



This equipment must be properly earthed.

- Note: Isolating Devices (Disconnecting means) should have minimum 3.0 mm contact gap.
- Earth wire shall be Yellow/Green (Y/G) in colour and longer than other AC wires for safety reason.

4.5 Heat Insulation

1. Please carry out insulation at pipe connection portion as mentioned in Indoor/Outdoor Unit Installation Diagram. Please wrap the insulated piping end to prevent water from going inside the piping.
2. If drain hose or connecting piping is in the room (where dew may form), please increase the insulation by using POLY-E FOAM with thickness 6 mm or above.


!	Refrigerant tubing shall be protected against mechanical damage.
----------	--

! CAUTION	Use a material with good heat-resistant properties as the heat insulation for the pipes. Be sure to insulate both the gas-side and liquid-side pipes. If the pipes are not adequately insulated, condensation or water leakages may occur.
------------------	--

Liquid-side pipes	Material shall withstand 120°C or higher
Gas-side pipes	

4.6 Disposal of Outdoor Unit Drain Water


- If a drain elbow is used, the unit should be placed on a stand which is taller than 5cm.
- If the unit is used in an area where temperature falls below 0 °C for 2 or 3 days in succession, it is recommended not to use a drain elbow, for the drain water freezes and the fan will not rotate.

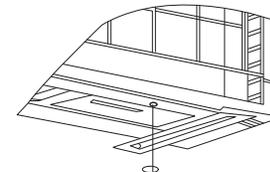

Drain elbow → Install the hose at an angle so that the water smoothly flows out.

4.7 Pump Down Operation

- Operate the pump down according to the following procedures.
 1. Confirm the valve on the liquid side and gas side is open.
 2. Press PUMP DOWN switch (SW1) on the display printed circuit board for more than 5 seconds. Pump down (cooling) operation is performed for 15 minutes.
 3. Set the liquid side 3 way valve to close position and wait until the pressure gauge indicates 0.01 MPa (0.1 kg/cm²G).
 4. Immediate set the gas side valve to close position and then press the PUMP DOWN switch (SW1) to stop the pump down operation.
- Note: Pump down operation will stop automatically after 15 minutes if PUMP DOWN switch (SW1) is not pressed again. Pump down operation is not started within 3 minutes after compressor is stopped.

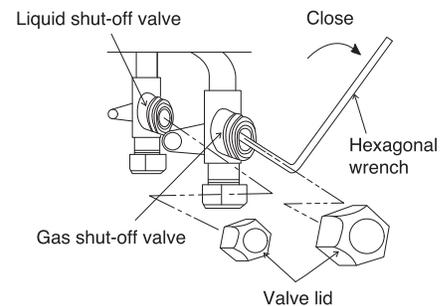

LED	2	3	4	5	Message
Status	○	○	○	○	Pump down operation progress
	○	○	○		3 minutes before operation end
	○	○			2 minutes before operation end
	○				1 minute before operation end
					Pump down operation end

○: Flashing

4.8 Cooling Only Operation

- Setting of Cooling only operation.

The equipment can be set to cooling only operation by setting the JP line on the outdoor unit display circuit board.

[Setting method]


Switch off power supply to the outdoor unit, cut JPN1 (COOL ONLY) as shown in Figure 1.

After cut off the wire, switch ON the equipment power.

When setting the cooling only operation, Heating operation is disable.

ODOUR WASH operation is disabled. (Odour cut operation is still enabled.)

To revert back the setting to heat pump operation, switch OFF the equipment power, reconnect JP1 (COOL ONLY) back to short circuit condition and switch ON the equipment power.

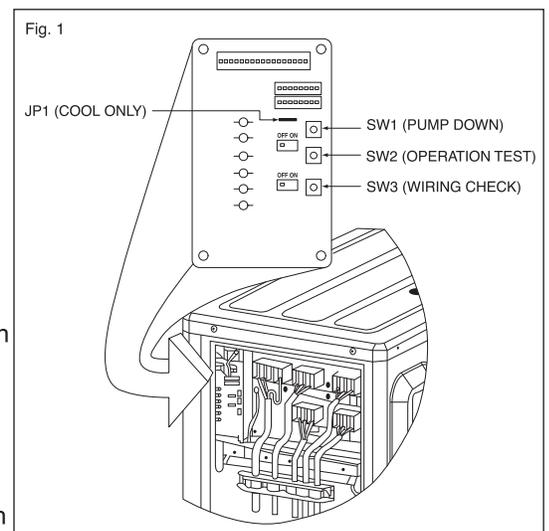


4.9 Heating Only Operation

- Setting of Heating only operation.

The equipment can be set to heating only operation by some setting on the Outdoor unit main circuit board.

[Setting method]

Switch off power supply to the outdoor unit, unplug and remove the lead wire on CN-HEAT

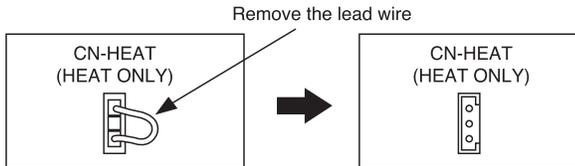


4.10 Wiring Error Check

This product capable to correct the wiring error automatically by following procedures.

1. Confirm the valve on the liquid side and gas side is open.
2. Press WIRING CHECK switch (SW3) on the display printed circuit board for more than 10 seconds to start wiring check operation.
3. Wiring check process will complete in approximately 20-25 minutes. However, wiring check operation will not start within 3 minutes after compressor is stopped. When outdoor air temperature is less than 5 °C or unit has abnormality, wiring check will not start. (See NOTE 2)

The LED 2 to 6 in display printed circuit board inside the outdoor unit indicate whether correction is possible or not and the status of the correction, as shown in the table below.

LED	2	3	4	5	6	Message
ROOM	A	B	C	D	—	
Status	All flashing					Automatic correction impossible
	LED 2, 4, 6 and LED 3, 5 alternatively flashing					Wiring check in progress
	Flashing one after another					Automatic correction completed
	Other than above					Unit has abnormally (Note 4)

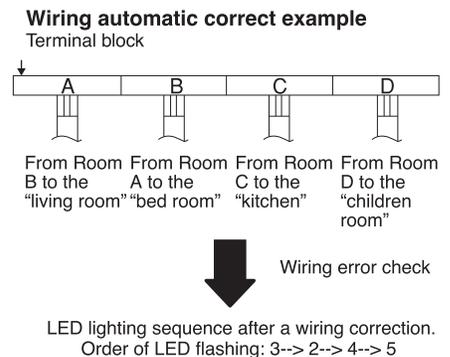

If automatic correct is impossible, check the indoor unit wiring and piping manually.

Note:

1. For two rooms, LED 4 and 5 are not illuminated and for three rooms, LED 5 is not illuminated after wiring operation complete.
2. If the outdoor air temperature is less than 5 °C or unit has abnormality, wiring operation will not start.
3. After wiring check operation is complete, LED indication will illuminated until normal operation starts.
4. Follow the product diagnosis procedure. (Check the diagnostic label at the control board cover.)
5. When LED 1 only illuminate, indicates that outdoor unit is operating normally.

4.11 In Case Of Reusing Existing Refrigerant Piping

- Observe the followings to decide reusing the existing refrigerant piping.
Poor refrigerant piping could result in product failure.
- In the circumstances listed below, do not reuse any refrigerant piping. Instead, make sure to install a new piping.
 - Heat insulation is not provided for either liquid-side or gas-side piping or both.
 - The existing refrigerant pipe has been left in an open condition.
 - The diameter and thickness of the existing refrigerant piping does not meet the requirement.
 - The piping length and elevation does not meet the requirement.Perform proper pump down before reuse piping.
- In the circumstances listed below, clean it thoroughly before reuse.
 - Pump down operation cannot be performed for the existing air-conditioner.
 - The compressor has a failure history.
 - Oil color is darken. (ASTM 4.0 and above).
 - The existing air-conditioner is gas/oil heat pump type.
- Do not reuse the flare to prevent gas leak. Make sure to install a new flare.
- If there is a welded part on the existing refrigerant piping, conduct a gas leak check on the welded part.
- Replace deteriorated heat insulating material with a new one.
Heat insulating material is required for both liquid-side and gas-side piping.

4.12 Check Items

- | | |
|--|--|
| <input type="checkbox"/> Short circuit of the blow-out air | <input type="checkbox"/> Mistake in wiring |
| <input type="checkbox"/> Smooth flow of the drain | <input type="checkbox"/> Reliable connection of the grand wire |
| <input type="checkbox"/> Reliable thermal insulation | <input type="checkbox"/> Looseness in terminal screw |
| <input type="checkbox"/> Leakage of refrigerant | <input type="checkbox"/> Grounding/Earth connection |