



PLFY-P20VCM-E2

Indoor Unit

2x2 4-Way Blow Ceiling Cassette

The compact size of this unit is ideal for 600 by 600mm ceilings and with a depth of 208mm, this lightweight unit makes installation a breeze. This unit also comes complete with a long life filter that will last for approximately 2,500 hours.

- **Compact size for handy installation and easy maintenance**
- **Only 208mm high**
- **Fresh air duct facility**



Pictures not to scale




Product Details

PLFY-P20VCM-E2	
Capacity (kW):	
Heating (Nominal)	2.5
Cooling (Nominal)	2.2
Heating (UK)	2.3
Cooling (UK)	2.1
Power Input (kW) Heating (Nominal)	0.05
Power Input (kW) Cooling (Nominal)	0.05
Airflow(m3/min) - Lo-Mi-Hi	8-9-10
Noise (dBA) - Lo-Mi-Hi	28-31-35
Width (grille) - mm	570 (650)
Depth (grille) - mm	570 (650)
Height (grille) - mm	235 (255)
Weight (grille) - kg	15.5 (18.5)
Electrical Supply	220-240v, 50Hz
Phase	Single
Mains Cable No. Cores	3
Running Current (A) - Heating	0.23
Running Current (A) - Cooling	0.23
Fuse Rating (BS88) - HRC (A)	6


Dimensions

PLFY-P20VCM-E2

Lower View >

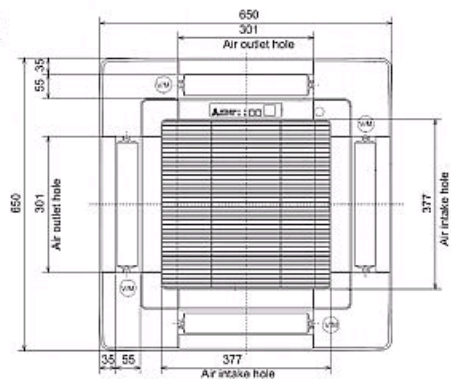

Side View >

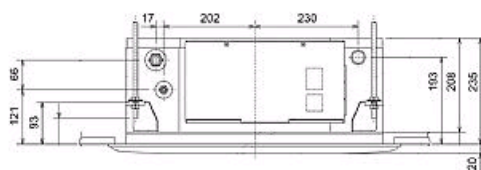

Telephone: 01707 282880

Email: air.conditioning@meuk.mee.com Website: <http://www.mitsubishielectric.co.uk/aircon>

Mitsubishi Electric reserves the right to make any variation in technical specification to the equipment described, or to withdraw or replace products without prior notification or public announcement.

Tel:
Fax:





PLFY-P25VCM-E2

Indoor Unit

2x2 4-Way Blow Ceiling Cassette

The compact size of this unit is ideal for 600 by 600mm ceilings and with a depth of 208mm, this lightweight unit makes installation a breeze. This unit also comes complete with a long life filter that will last for approximately 2,500 hours.

- **Compact size for handy installation and easy maintenance**
- **Only 208mm high**
- **Fresh air duct facility**



Pictures not to scale




Product Details

PLFY-P25VCM-E2	
Capacity (kW):	
Heating (Nominal)	3.2
Cooling (Nominal)	2.8
Heating (UK)	3.0
Cooling (UK)	2.6
Power Input (kW) Heating (Nominal)	0.05
Power Input (kW) Cooling (Nominal)	0.05
Airflow(m3/min)(Heating /Cooling) - Lo-Mi-Hi	8-9-10 /8-9-10
Noise (dBA) (Heating/Cooling) - Lo-Mi-Hi	28-31-3728-31-37
Width (grille) - mm	570 (650)
Depth (grille) - mm	570 (650)
Height (grille) - mm	235 (255)
Weight (grille) - kg	15.5 (18.5)
Electrical Supply	220-240v, 50Hz
Phase	Single
Mains Cable No. Cores	3
Running Current (A) - Heating	0.23
Running Current (A) - Cooling	0.23
Fuse Rating (BS88) - HRC (A)	6


Dimensions

PLFY-P25VCM-E2

Lower View >

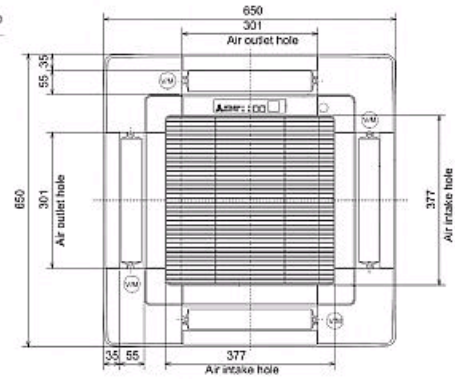

Side View >

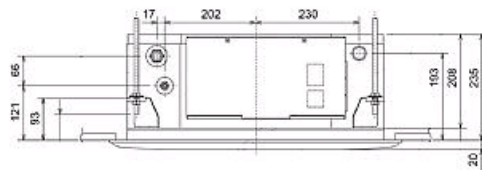

Telephone: 01707 282880

Email: air.conditioning@meuk.mee.com Website: <http://www.mitsubishielectric.co.uk/aircon>

Mitsubishi Electric reserves the right to make any variation in technical specification to the equipment described, or to withdraw or replace products without prior notification or public announcement.

Tel:
Fax:





PLFY-P32VCM-E2

Indoor Unit

2x2 4-Way Blow Ceiling Cassette

The compact size of this unit is ideal for 600 by 600mm ceilings and with a depth of 208mm, this lightweight unit makes installation a breeze. This unit also comes complete with a long life filter that will last for approximately 2,500 hours.

- **Compact size for handy installation and easy maintenance**
- **Only 208mm high**
- **Fresh air duct facility**



Pictures not to scale




Product Details

PLFY-P32VCM-E2	
Capacity (kW):	
Heating (Nominal)	4.0
Cooling (Nominal)	3.6
Heating (UK)	4.0
Cooling (UK)	3.4
R410A High Sensible Cooling (UK)	2.6
SHF R410A (UK)	0.76
SHF High Sensible R410A (UK)	0.85
Power Input (kW) Heating (Nominal)	0.06
Power Input (kW) Cooling (Nominal)	0.06
Airflow(m3/min)(Heating /Cooling) - Lo-Mi-Hi	8-9-11 /8-9-11
Noise (dBA) (Heating/Cooling) - Lo-Mi-Hi	29-33-3829-33-38
Width (grille) - mm	570 (650)
Depth (grille) - mm	570 (650)
Height (grille) - mm	235 (255)
Weight (grille) - kg	17 (20)
Electrical Supply	220-240v, 50Hz
Phase	Single
Mains Cable No. Cores	3
Running Current (A) - Heating	0.28
Running Current (A) - Cooling	0.28
Fuse Rating (BS88) - HRC (A)	6


Dimensions

PLFY-P32VCM-E2

Lower View >

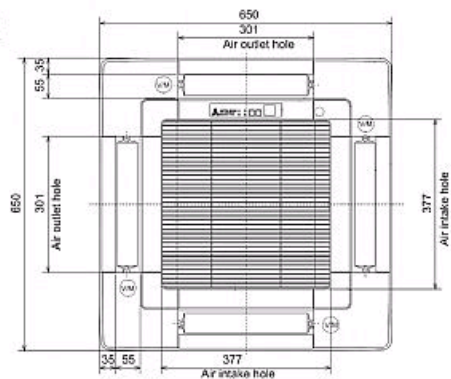

Side View >

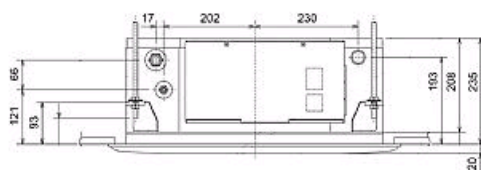

Telephone: 01707 282880

Email: air.conditioning@meuk.mee.com Website: <http://www.mitsubishielectric.co.uk/aircon>

Mitsubishi Electric reserves the right to make any variation in technical specification to the equipment described, or to withdraw or replace products without prior notification or public announcement.

Tel:
Fax:





PLFY-P40VCM-E2

Indoor Unit

2x2 4-Way Blow Ceiling Cassette

The compact size of this unit is ideal for 600 by 600mm ceilings and with a depth of 208mm, this lightweight unit makes installation a breeze. This unit also comes complete with a long life filter that will last for approximately 2,500 hours.

- **Compact size for handy installation and easy maintenance**
- **Only 208mm high**
- **Fresh air duct facility**



Pictures not to scale




Product Details

PLFY-P40VCM-E2	
Capacity (kW):	
Heating (Nominal)	5.0
Cooling (Nominal)	4.5
Heating (UK)	5.0
Cooling (UK)	4.3
R410A High Sensible Cooling (UK)	3.3
SHF R410A (UK)	0.7
SHF High Sensible R410A (UK)	0.76
Power Input (kW) Heating (Nominal)	0.06
Power Input (kW) Cooling (Nominal)	0.06
Airflow(m3/min)(Heating /Cooling) - Lo-Mi-Hi	8-9-11 /8-9-11
Noise (dBA) (Heating/Cooling) - Lo-Mi-Hi	30-34-3930-34-39
Width (grille) - mm	570 (650)
Depth (grille) - mm	570 (650)
Height (grille) - mm	235 (255)
Weight (grille) - kg	17 (20)
Electrical Supply	220-240v, 50Hz
Phase	Single
Mains Cable No. Cores	3
Running Current (A) - Heating	0.28
Running Current (A) - Cooling	0.28
Fuse Rating (BS88) - HRC (A)	6


Dimensions

PLFY-P40VCM-E2

Lower View >

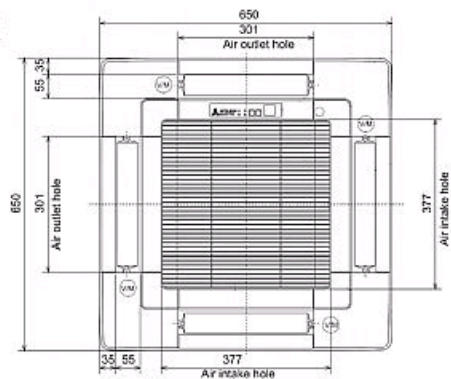

Side View >

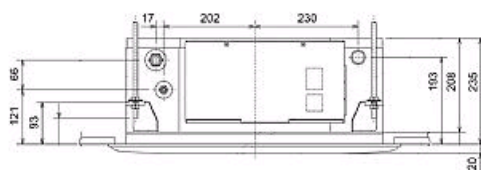

Telephone: 01707 282880

Email: air.conditioning@meuk.mee.com Website: <http://www.mitsubishielectric.co.uk/aircon>

Mitsubishi Electric reserves the right to make any variation in technical specification to the equipment described, or to withdraw or replace products without prior notification or public announcement.

Tel:
Fax:

