

D1 TYPE

1 WAY CASSETTE




Designed for installation within the ceiling void, the D1 range of slimline 1 way blow cassettes feature powerful yet quiet fans for up to 4,2 m.

Technical focus

- Ultra-Slim
- Suitable for standard and high ceilings
- Built-in drain pump provides 590 mm lift
- Easy to install and maintain
- Hanging height can be easily adjusted
- Uses a DC-Fan motor to improve energy-efficiency

Drain height

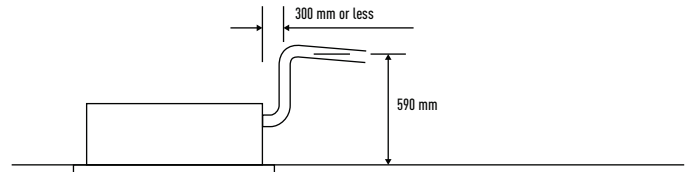

Optional Controller.
Control for hotel application
PAW-REZC3



Optional Controller.
Wired remote controller
CZ-RTC5
Compatible with Econavi



Optional Controller.
Timer remote controller
CZ-RTC4
Compatible with Econavi



Optional Econavi Sensor.
CZ-CENSC1



Optional Controller.
Wireless remote controller
CZ-RWSD2



Optional Controller.
Simplified remote controller
CZ-REZC2



Panel
CZ-KPD2

Model		S-28MD1E5	S-36MD1E5	S-45MD1E5	S-56MD1E5	S-73MD1E5
Power source		230 V / Single Phase / 50 Hz				
Cooling capacity	kW	2.8	3.6	4.5	5.6	7.3
Power input cooling	W	51	51	51	60	87
Operating current cooling	A	0.39	0.39	0.39	0.46	0.70
Heating capacity	kW	3.2	4.2	5.0	6.3	8.0
Power input heating	W	40	40	40	48	76
Operating current heating	A	0.35	0.35	0.35	0.41	0.65
Fan type		Sirocco fan				
Air volume	Hi / Med / Lo	720 / 600 / 540		720 / 660 / 600	780 / 690 / 600	1.080 / 900 / 780
Sound pressure level	Hi / Med / Lo	36 / 34 / 33		36 / 35 / 34	38 / 36 / 34	45 / 40 / 36
Dimensions	H x W x D	200 (+20)x1,000 (1,230)x710 (800)				
Net weight	kg	26.5 (21 + 5.5)				27.5 (22 + 5.5)
Pipe connections	Liquid	1/4				3/8
	Gas	1/2				5/8
Drain piping		VP-25				

Rating Conditions: Cooling Indoor 27°C DB / 19°C WB. Cooling Outdoor 35°C DB / 24°C WB. Heating Indoor 20°C DB. Heating Outdoor 7°C DB / 6°C WB.
DB: Dry Bulb; WB: Wet Bulb.



ECONAVI and INTERNET CONTROL: Optional.