NEW / AQUAREA

AQUAREA AIR RADIATORS



Line up of super low temperature radiators for Heat Pump application

During winter, the operating principle is based on micro fans with very low power consumption and minimum noise, that send hot air coming from the heat exchanger, to the inside of the front panel of the device and therefore heat it effectively. With this principle, the terminal also provides significant power while heating, without running the main fan. Comfort temperatures are therefore maintained, without air movements and in silence. In summer mode, the airflow generated by the micro fans is stopped to avoid any dew formation on the terminal's front surface.





Technical focus


Front panel heating with radiant effect

- High heating capacity (without main fan running)
- \cdot 4 fan speeds and capacities
- Exclusive design
- Extremely compact (only 12,9 cm deep)
- Cooling and dehumidification functions possible (drain is needed)
- 3-way valve included (no overflow valve needed on the installation if more than 3 radiators installed)
- Touch screen thermostat

Fan Coils for Heat Pump application		PAW-AAIR-200					PAW-AAIR-700					PAW-AAIR-900				
Total heating capacity	W	138	160	217	470	570	223	360	708	1,032	1,188	273	475	886	1,420	1,703
Water flow	kg/h	23.7	27.5	37.3	80.8	98.0	38.4	61.9	121.8	177.5	204.3	47.0	81.7	152.4	244.2	292.9
Water pressure drop	kPa	0.1	0.2	0.4	2.0	2.9	0.1	0.1	0.3	0.8	1.0	0.1	0.2	0.5	1.6	2.2
Air flow	m³/h	28	37	55	113	162	44	84	155	252	320	54	110	248	367	461
	Speed	Main Fan Ot	ff Super Min	Min	Med	Max	Main Fan Off	Super Min	Min	Med	Max	Main Fan Off	Super Min	Min	Med	Max
Maximum input power	W	2	5	7	9	13	3	9	14	18	22	3	11	16	20	24
Sound pressure level	dB(A)	17.6	18.8	24.7	33.2	39.4	18.4	19.6	25.8	34.1	40.2	18.4	22.3	26.2	34.4	42.2
Inlet water temperature	°C	35	35	35	35	35	35	35	35	35	35	35	35	35	35	35
Outlet water temperature	°C	30	30	30	30	30	30	30	30	30	30	30	30	30	30	30
Inlet air temperature	°C	19	19	19	19	19	19	19	19	19	19	19	19	19	19	19
Outlet air temperature	°C	34.5	32.6	38.9	32.0	30.0	34.9	32.4	33.3	31.8	30.6	34.8	32.5	30.2	31.1	30.6
Dimensions (H x W x D)	mm	579 x 735 x 129					579 x 935 x 129					579 x 1,135 x 129				
Weight	kg	17				20					23					
3-ways valve included		Yes					Yes					Yes				
Touch screen thermostat	Yes					Yes					Yes					

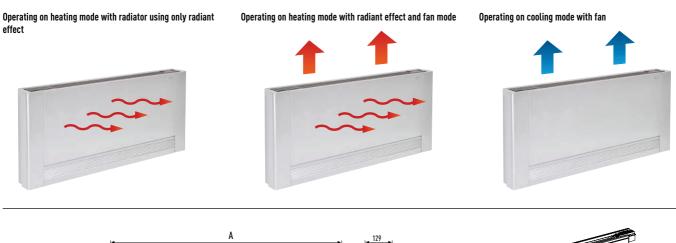







A Supports cover