

T2 TYPE CEILING



S-36MT2E5A // S-45MT2E5A // S-56MT2E5A



S-106MT2E5A // S-140MT2E5A


The T2 TYPE ceiling mounted units feature a DC-Fan motor for increased efficiency and reduced operating sound levels. All the units are the same height and depth for a uniform appearance in mixed installations and feature a fresh air knockout for improved air quality.

Technical focus


- Low sound levels
- New design, all units just 235 mm high
- Large and wide air distribution
- Easy to install and maintain
- Fresh air knockout

Further comfort improvement


The wide air discharge opening widens the airflow to the left and the right, so that a comfortable temperature is obtained in the entire room. The unpleasant feeling caused when the airflow directly hits the human body is prevented by the "Draft prevention position", which changes the swing width, so that the degree of comfort is increased.



Further comfort improvement with airflow distribution

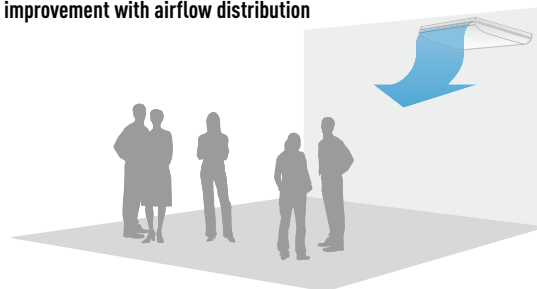

Air distribution is automatically altered depending on the operational mode

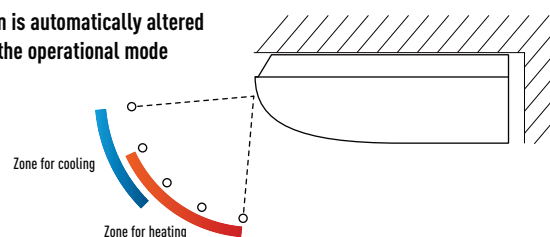

Optional Controller.
Control for hotel application
PAW-RE2C3



Optional Controller.
Wired remote controller
CZ-RTC5
Compatible with Econavi



Optional Controller.
Timer remote controller
CZ-RTC4
Compatible with Econavi



Optional Econavi Sensor.
CZ-CENSC1



Optional Controller.
Wireless remote controller
CZ-RWST3N



Optional Controller.
Simplified remote controller
CZ-RE2C2

Model			S-36MT2E5A	S-45MT2E5A	S-56MT2E5A	S-73MT2E5A	S-106MT2E5A	S-140MT2E5A
Power source			230 V / Single Phase / 50 Hz					
Cooling capacity	kW		3.6	4.5	5.6	7.3	10.6	14.0
Power input cooling	W		35	40	40	55	80	100
Operating current cooling	A		0.36	0.38	0.38	0.44	0.67	0.79
Heating capacity	kW		4.2	5.0	6.3	8.0	11.4	16.0
Power input heating	W		35	40	40	55	80	100
Operating current heating	A		0.36	0.38	0.38	0.44	0.67	0.79
Fan type			Sirocco fan					
Air volume	Hi / Med / Lo	m³/h	840 / 720 / 630	900 / 750 / 630	900 / 750 / 630	1.260 / 1.080 / 930	1.800 / 1.500 / 1.380	1.920 / 1.680 / 1.440
Sound pressure level	L1¹ / Hi / Med / Lo	dB(A)	— / 36 / 32 / 30	— / 37 / 33 / 30	— / 37 / 33 / 30	— / 39 / 35 / 33	— / 42 / 37 / 36	— / 46 / 40 / 37
Dimensions	H x W x D	mm	235 x 960 x 690			235 x 1,275 x 690	235 x 1,590 x 690	
Net weight		kg	27			33	40	
Pipe connections	Liquid	inch (mm)	1/4 (6.35)			3/8 (9.52)		
	Gas	inch (mm)	1/2 (12.70)			5/8 (15.88)		
Drain piping			VP-20					

Rating Conditions: Cooling Indoor 27°C DB / 19°C WB. Cooling Outdoor 35°C DB / 24°C WB. Heating Indoor 20°C DB. Heating Outdoor 7°C DB / 6°C WB.
DB: Dry Bulb; WB: Wet Bulb.

1) Sound pressure level with fan only.



ECONAVI and INTERNET CONTROL: Optional.