


P1 TYPE FLOOR STANDING

R1 TYPE CONCEALED FLOOR STANDING

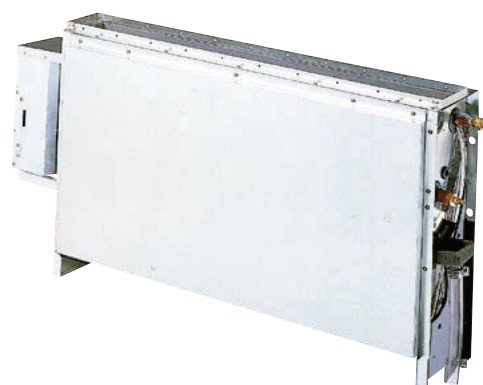


P1 TYPE

The compact floor standing P1 units are the ideal solution for providing perimeter air conditioning. The standard wired controller can be incorporated into the body of the unit.

Technical focus

- Pipes can be connected to either side of the unit from the bottom or rear
- Easy to install
- Front panel opens fully for easy maintenance
- Removable air discharge grille gives flexible airflow
- Room for condensate pump
- For build-in remote control, only CZ-RTC2 is suitable

Effective perimeter handling



A remote control can be installed




R1 TYPE

At just 229 mm deep, the R1 unit can be easily concealed in perimeter areas to provide powerful and effective air conditioning.

Technical focus

- Chassis unit for discreet installation
- Complete with removable filters
- Pipes can be connected to either side of the unit from the bottom or rear
- Easy to install

Perimeter air conditioning with high interior quality

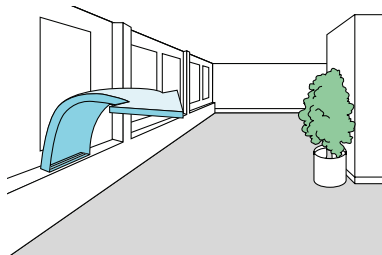

Optional Controller.
Control for hotel application
PAW-RE2C3



Optional Controller
Timer remote controller
CZ-RTC2



Optional Controller.
Wired remote controller
CZ-RTC5
Compatible with Econavi



Optional Econavi Sensor.
CZ-CENSC1



Optional Controller.
Wireless remote controller
CZ-RWSC2 + CZ-RWSC3



Optional Controller.
Simplified remote controller
CZ-RE2C2

Model P1 Type		S-22MP1E5	S-28MP1E5	S-36MP1E5	S-45MP1E5	S-56MP1E5	S-71MP1E5
Model R1 Type		S-22MR1E5	S-28MR1E5	S-36MR1E5	S-45MR1E5	S-56MR1E5	S-71MR1E5
Power source		230 V / Single Phase / 50 Hz					
Cooling capacity	kW	2.2	2.8	3.6	4.5	5.6	7.1
Power input cooling	W	56	56	85	126	126	160
Operating current cooling	A	0.25	0.25	0.38	0.56	0.56	0.72
Heating capacity	kW	2.5	3.2	4.2	5.0	6.3	8.0
Power input heating	W	40	40	70	91	91	120
Operating current heating	A	0.18	0.18	0.31	0.41	0.41	0.54
Fan type		Sirocco fan					
Air volume	Hi / Med / Lo	m ³ /h	420 / 360 / 300	420 / 360 / 300	540 / 420 / 360	720 / 540 / 480	900 / 780 / 660
Sound pressure level	Hi / Med / Lo	dB(A)	33 / 30 / 28	33 / 30 / 28	39 / 35 / 29	38 / 35 / 31	41 / 38 / 35
Dimensions P1 Type	H x W x D	mm	615 x 1.380 x 230				
Net weight P1 Type	kg	29					39
Dimensions R1 Type	H x W x D	mm	616 x 1.219 x 229				
Net weight R1 Type	kg	21					28
Pipe connections	Liquid	inch	1/4				3/8
	Gas	inch	1/2				5/8
	Drain piping		VP-20				

Rating Conditions: Cooling Indoor 27°C DB / 19°C WB. Cooling Outdoor 35°C DB / 24°C WB. Heating Indoor 20°C DB. Heating Outdoor 7°C DB / 6°C WB.
DB: Dry Bulb; WB: Wet Bulb.



ECONAVI and INTERNET CONTROL: Optional.