

# Air Conditioning

## Product Information

### PFFY-P20VLEM-E : Indoor Unit

Floor Standing Exposed



CITY MULT



A compact cased unit providing simple, effective air conditioning in perimeter zones. The unit is easy to install and at only 220mm deep offers an unobtrusive method of delivering a highly efficient air-conditioning performance.

## FEATURES




### INDOOR

Heating Capacity (kW) (nominal)	2.5
Cooling Capacity (kW) (nominal)	2.2
High Performance Heating Capacity (kW) (UK)	2.5
COP Priority Heating Capacity (kW) (UK)	2.3
Cooling Capacity (kW) (UK)	2.1
Cooling Capacity (Hi-Sens Mode) (kW) (UK)	1.6
SHF (UK)	0.81
SHF (Hi-Sens Mode) (UK)	0.88
Heating Power Input (kW) (nominal)	0.04
Cooling Power Input (kW) (nominal)	0.04
Airflow (m³/min) - Lo-Hi	5.5 - 6.5
Sound Pressure Level (dBA) - Lo-Hi	34 - 40
Weight (kg)	23
Dimensions (mm) Width	1050
Dimensions (mm) Depth	220
Dimensions (mm) Height	630
Electrical Supply	220-240V, 50HZ
Phase	SINGLE
Running Current (A) - Heating / Cooling	0.19 / 0.19
Fuse Rating (BS88) - HRC (A)	6
Mains Cable No. Cores	3


### DIMENSIONS

PFFY-P20VLEM-E


Upper View >



Front View >

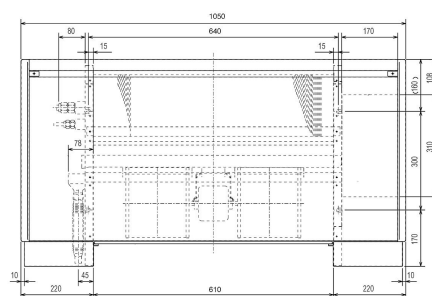

Side View >



# Air Conditioning

## Product Information

### PFFY-P25VLEM-E : Indoor Unit

Floor Standing Exposed



CITY MULT



A compact cased unit providing simple, effective air conditioning in perimeter zones. The unit is easy to install and at only 220mm deep offers an unobtrusive method of delivering a highly efficient air-conditioning performance.

## FEATURES




### INDOOR

Heating Capacity (kW) (nominal)	3.2
Cooling Capacity (kW) (nominal)	2.8
High Performance Heating Capacity (kW) (UK)	3.2
COP Priority Heating Capacity (kW) (UK)	3
Cooling Capacity (kW) (UK)	2.7
Cooling Capacity (Hi-Sens Mode) (kW) (UK)	2
SHF (UK)	0.7
SHF (Hi-Sens Mode) (UK)	0.8
Heating Power Input (kW) (nominal)	0.04
Cooling Power Input (kW) (nominal)	0.04
Airflow (m³/min) - Lo-Hi	5.5 - 6.5
Sound Pressure Level (dBA) - Lo-Hi	34 - 40
Weight (kg)	23
Dimensions (mm) Width	1050
Dimensions (mm) Depth	220
Dimensions (mm) Height	630
Electrical Supply	220-240V, 50HZ
Phase	SINGLE
Running Current (A) - Heating / Cooling	0.19 / 0.19
Fuse Rating (BS88) - HRC (A)	6
Mains Cable No. Cores	3


### DIMENSIONS

PFFY-P25VLEM-E


Upper View >



Front View >

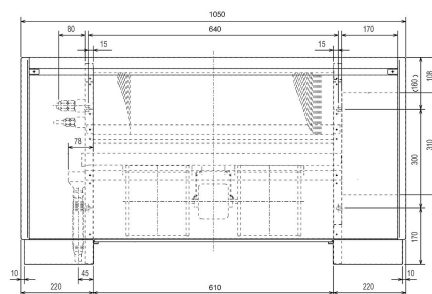

Side View >





# Air Conditioning

## Product Information

### PFFY-P32VLEM-E : Indoor Unit

Floor Standing Exposed



CITY MULT



A compact cased unit providing simple, effective air conditioning in perimeter zones. The unit is easy to install and at only 220mm deep offers an unobtrusive method of delivering a highly efficient air-conditioning performance.

## FEATURES




### INDOOR

Heating Capacity (kW) (nominal)	4
Cooling Capacity (kW) (nominal)	3.6
High Performance Heating Capacity (kW) (UK)	4
COP Priority Heating Capacity (kW) (UK)	3.7
Cooling Capacity (kW) (UK)	3.4
Cooling Capacity (Hi-Sens Mode) (kW) (UK)	2.6
SHF (UK)	0.74
SHF (Hi-Sens Mode) (UK)	0.81
Heating Power Input (kW) (nominal)	0.06
Cooling Power Input (kW) (nominal)	0.06
Airflow (m³/min) - Lo-Hi	7 - 9
Sound Pressure Level (dBA) - Lo-Hi	35 - 40
Weight (kg)	25
Dimensions (mm) Width	1170
Dimensions (mm) Depth	220
Dimensions (mm) Height	630
Electrical Supply	220-240V, 50HZ
Phase	SINGLE
Running Current (A) - Heating / Cooling	0.29 / 0.29
Fuse Rating (BS88) - HRC (A)	6
Mains Cable No. Cores	3


### DIMENSIONS

PFFY-P32VLEM-E


Upper View >



Front View >

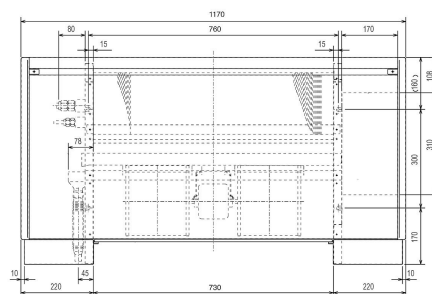

Side View >



# Air Conditioning

## Product Information

### PFFY-P40VLEM-E : Indoor Unit

Floor Standing Exposed



CITY MULT



A compact cased unit providing simple, effective air conditioning in perimeter zones. The unit is easy to install and at only 220mm deep offers an unobtrusive method of delivering a highly efficient air-conditioning performance.

## FEATURES




### INDOOR

Heating Capacity (kW) (nominal)	5
Cooling Capacity (kW) (nominal)	4.5
High Performance Heating Capacity (kW) (UK)	5
COP Priority Heating Capacity (kW) (UK)	4.7
Cooling Capacity (kW) (UK)	4.3
Cooling Capacity (Hi-Sens Mode) (kW) (UK)	3.3
SHF (UK)	0.72
SHF (Hi-Sens Mode) (UK)	0.79
Heating Power Input (kW) (nominal)	0.065
Cooling Power Input (kW) (nominal)	0.065
Airflow (m³/min) - Lo-Hi	9 - 11
Sound Pressure Level (dBA) - Lo-Hi	38 - 43
Weight (kg)	26
Dimensions (mm) Width	1170
Dimensions (mm) Depth	220
Dimensions (mm) Height	630
Electrical Supply	220-240V, 50HZ
Phase	SINGLE
Running Current (A) - Heating / Cooling	0.32 / 0.32
Fuse Rating (BS88) - HRC (A)	6
Mains Cable No. Cores	3


### DIMENSIONS

PFFY-P40VLEM-E


Upper View >



Front View >

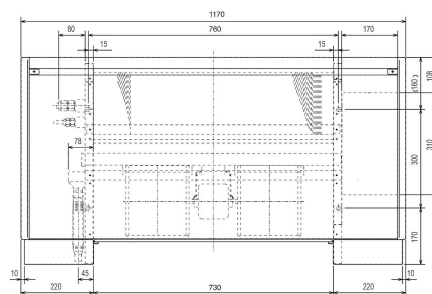

Side View >





# Air Conditioning

## Product Information

### PFFY-P50VLEM-E : Indoor Unit

Floor Standing Exposed



CITY MULT



A compact cased unit providing simple, effective air conditioning in perimeter zones. The unit is easy to install and at only 220mm deep offers an unobtrusive method of delivering a highly efficient air-conditioning performance.

## FEATURES




### INDOOR

Heating Capacity (kW) (nominal)	6.3
Cooling Capacity (kW) (nominal)	5.6
High Performance Heating Capacity (kW) (UK)	6.3
COP Priority Heating Capacity (kW) (UK)	5.9
Cooling Capacity (kW) (UK)	5.3
Cooling Capacity (Hi-Sens Mode) (kW) (UK)	4.1
SHF (UK)	0.74
SHF (Hi-Sens Mode) (UK)	0.8
Heating Power Input (kW) (nominal)	0.085
Cooling Power Input (kW) (nominal)	0.085
Airflow (m³/min) - Lo-Hi	12 - 14
Sound Pressure Level (dBA) - Lo-Hi	38 - 43
Weight (kg)	30
Dimensions (mm) Width	1410
Dimensions (mm) Depth	220
Dimensions (mm) Height	630
Electrical Supply	220-240V, 50HZ
Phase	SINGLE
Running Current (A) - Heating / Cooling	0.4 / 0.4
Fuse Rating (BS88) - HRC (A)	6
Mains Cable No. Cores	3


### DIMENSIONS

PFFY-P50VLEM-E


Upper View >



Front View >

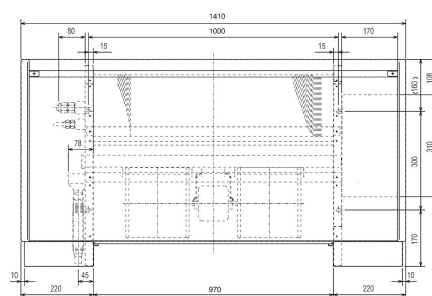

Side View >



# Air Conditioning

## Product Information

### PFFY-P63VLEM-E : Indoor Unit

Floor Standing Exposed



CITY MULT



A compact cased unit providing simple, effective air conditioning in perimeter zones. The unit is easy to install and at only 220mm deep offers an unobtrusive method of delivering a highly efficient air-conditioning performance.

## FEATURES




### INDOOR

Heating Capacity (kW) (nominal)	8
Cooling Capacity (kW) (nominal)	7.1
High Performance Heating Capacity (kW) (UK)	8
COP Priority Heating Capacity (kW) (UK)	7.5
Cooling Capacity (kW) (UK)	6.7
Cooling Capacity (Hi-Sens Mode) (kW) (UK)	5.2
SHF (UK)	0.73
SHF (Hi-Sens Mode) (UK)	0.79
Heating Power Input (kW) (nominal)	0.1
Cooling Power Input (kW) (nominal)	0.1
Airflow (m³/min) - Lo-Hi	12 - 15.5
Sound Pressure Level (dBA) - Lo-Hi	40 - 46
Weight (kg)	32
Dimensions (mm) Width	1410
Dimensions (mm) Depth	220
Dimensions (mm) Height	630
Electrical Supply	220-240V, 50HZ
Phase	SINGLE
Running Current (A) - Heating / Cooling	0.46 / 0.46
Fuse Rating (BS88) - HRC (A)	6
Mains Cable No. Cores	3


### DIMENSIONS

PFFY-P63VLEM-E

Upper View >



Front View >

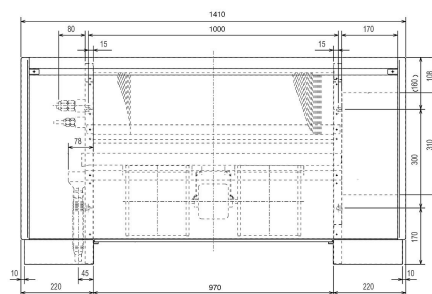

Side View >

