




# PFFY-P20VLRM-E

Indoor Unit

Floor Standing Concealed

A compact concealed unit providing simple, effective air conditioning in perimeter zones. The unit is easy to install and at only 220mm deep offers an unobtrusive method of delivering highly efficient air-conditioning performance.

- **Concealed unit for hidden installation**
- **Ideal for perimeter refurbishments**
- **Cooling operation set temperature can be set down to 14°C db when used with R410A**

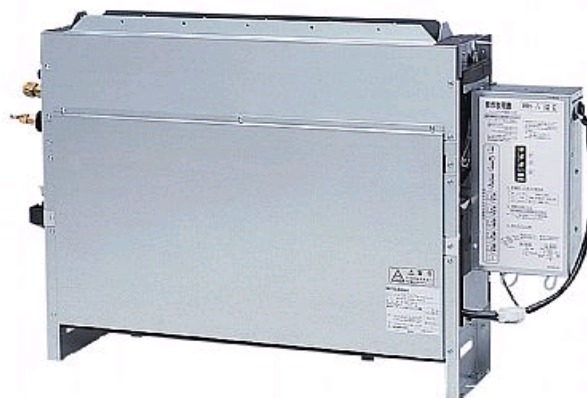

Pictures not to scale

PFFY-P20VLRM-E	
Capacity (kW):	
Heating (Nominal)	2.5
Cooling (Nominal)	2.2
Heating (UK)	2.5
Cooling (UK)	2.1
R410A High Sensible Cooling (UK)	1.6
SHF R410A (UK)	0.81
SHF High Sensible R410A (UK)	0.88
Power Input (kW) Heating (Nominal)	0.04
Power Input (kW) Cooling (Nominal)	0.04
Airflow(m3/min) - Lo-Hi	5.5-6.5
Noise (dBA) - Lo-Hi	34-40
Width - mm	886
Depth - mm	220
Height - mm	639
Weight - kg	18.5
Electrical Supply	220-240v, 50Hz
Phase	Single
Mains Cable No. Cores	3
Running Current (A) - Heating	0.19
Running Current (A) - Cooling	0.19
Fuse Rating (BS88) - HRC (A)	6

[illegible]




# PFFY-P25VLRM-E

Indoor Unit

Floor Standing Concealed

A compact concealed unit providing simple, effective air conditioning in perimeter zones. The unit is easy to install and at only 220mm deep offers an unobtrusive method of delivering highly efficient air-conditioning performance.

- **Concealed unit for hidden installation**
- **Ideal for perimeter refurbishments**
- **Cooling operation set temperature can be set down to 14°C db when used with R410A**

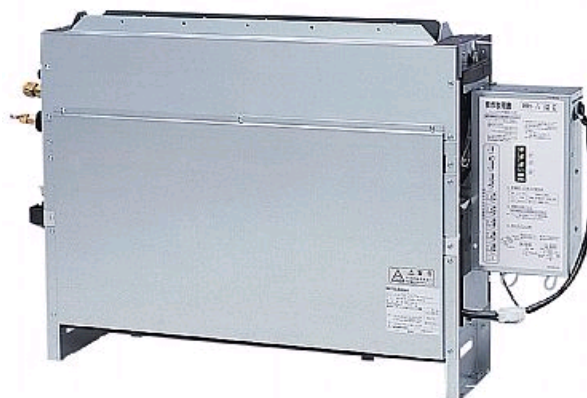


Pictures not to scale

## PFFY-P25VLRM-E

Capacity (kW):	
Heating (Nominal)	3.2
Cooling (Nominal)	2.8
Heating (UK)	3.2
Cooling (UK)	2.7
R410A High Sensible Cooling (UK)	2.0
SHF R410A (UK)	0.7
SHF High Sensible R410A (UK)	0.8
Power Input (kW) Heating (Nominal)	0.04
Power Input (kW) Cooling (Nominal)	0.04
Airflow(m3/min) - Lo-Hi	5.5-6.5
Noise (dBA) - Lo-Hi	34-40
Width - mm	886
Depth - mm	220
Height - mm	639
Weight - kg	18.5
Electrical Supply	220-240v, 50Hz
Phase	Single
Mains Cable No. Cores	3
Running Current (A) - Heating	0.19
Running Current (A) - Cooling	0.19
Fuse Rating (BS88) - HRC (A)	6

PFFY-P25VLRM-E

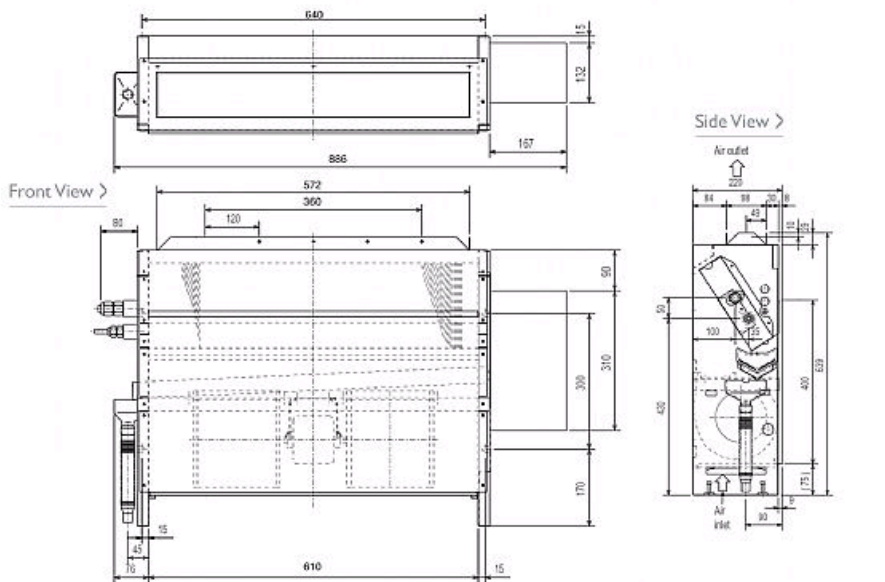

**Telephone: 01707 282880**

Email: [air.conditioning@meuk.mee.com](mailto:air.conditioning@meuk.mee.com) Website: <http://www.mitsubishielectric.co.uk/aircon>

Mitsubishi Electric reserves the right to make any variation in technical specification to the equipment described, or to withdraw or replace products without prior notification or public announcement.

**Tel:**  
**Fax:**






# PFFY-P32VLRM-E

Indoor Unit

Floor Standing Concealed

A compact concealed unit providing simple, effective air conditioning in perimeter zones. The unit is easy to install and at only 220mm deep offers an unobtrusive method of delivering highly efficient air-conditioning performance.

- **Concealed unit for hidden installation**
- **Ideal for perimeter refurbishments**
- **Cooling operation set temperature can be set down to 14°C db when used with R410A**

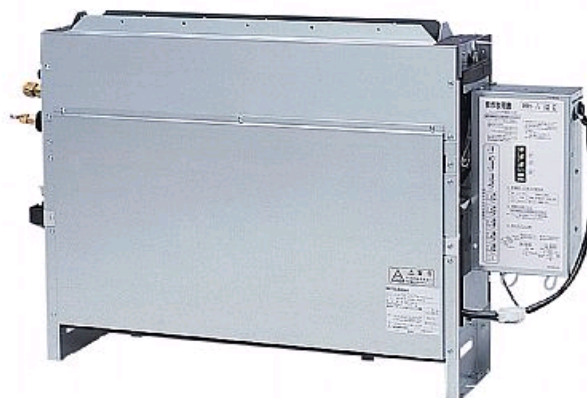

Pictures not to scale


## Product Details

PFFY-P32VLRM-E	
Capacity (kW):	
Heating (Nominal)	4.0
Cooling (Nominal)	3.6
Heating (UK)	4.0
Cooling (UK)	3.4
R410A High Sensible Cooling (UK)	2.6
SHF R410A (UK)	0.74
SHF High Sensible R410A (UK)	0.81
Power Input (kW) Heating (Nominal)	0.06
Power Input (kW) Cooling (Nominal)	0.06
Airflow(m3/min) - Lo-Hi	7-9
Noise (dBA) - Lo-Hi	35-40
Width - mm	1006
Depth - mm	220
Height - mm	639
Weight - kg	20
Electrical Supply	220-240v, 50Hz
Phase	Single
Mains Cable No. Cores	3
Running Current (A) - Heating	0.29
Running Current (A) - Cooling	0.29
Fuse Rating (BS88) - HRC (A)	6


## Dimensions

PFFY-P32VLRM-E


Upper View >

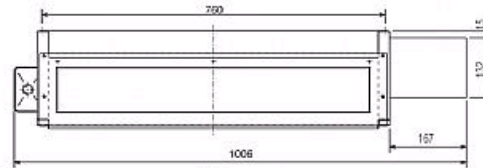

Front View >

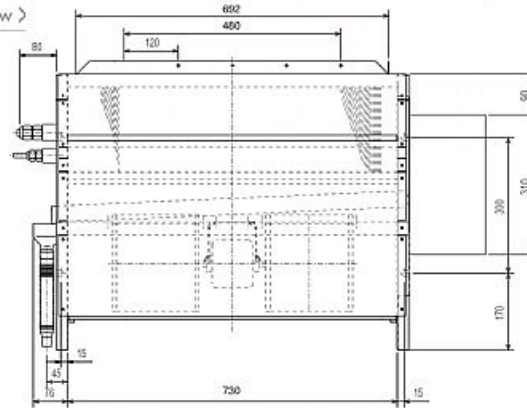

Side View >

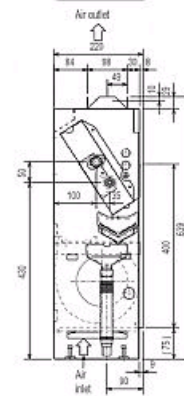

**Telephone: 01707 282880**

Email: [air.conditioning@meuk.mee.com](mailto:air.conditioning@meuk.mee.com) Website: <http://www.mitsubishielectric.co.uk/aircon>

Mitsubishi Electric reserves the right to make any variation in technical specification to the equipment described, or to withdraw or replace products without prior notification or public announcement.

Tel:  
Fax:





# PFFY-P40VLRM-E

Indoor Unit

Floor Standing Concealed

A compact concealed unit providing simple, effective air conditioning in perimeter zones. The unit is easy to install and at only 220mm deep offers an unobtrusive method of delivering highly efficient air-conditioning performance.

- **Concealed unit for hidden installation**
- **Ideal for perimeter refurbishments**
- **Cooling operation set temperature can be set down to 14°C db when used with R410A**







Pictures not to scale



## PFFY-P40VLRM-E

Capacity (kW):	
Heating (Nominal)	5.0
Cooling (Nominal)	4.5
Heating (UK)	5.0
Cooling (UK)	4.3
R410A High Sensible Cooling (UK)	3.3
SHF R410A (UK)	0.72
SHF High Sensible R410A (UK)	0.79
Power Input (kW) Heating (Nominal)	0.065
Power Input (kW) Cooling (Nominal)	0.065
Airflow(m3/min) - Lo-Hi	9-11
Noise (dBA) - Lo-Hi	38-43
Width - mm	1006
Depth - mm	220
Height - mm	639
Weight - kg	21
Electrical Supply	220-240v, 50Hz
Phase	Single
Mains Cable No. Cores	3
Running Current (A) - Heating	0.32
Running Current (A) - Cooling	0.32
Fuse Rating (BS88) - HRC (A)	6

PFFY-P40VLRM-E

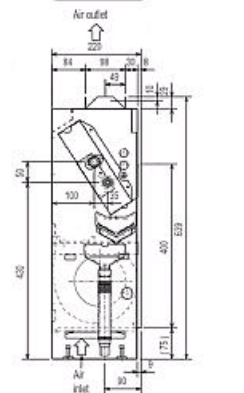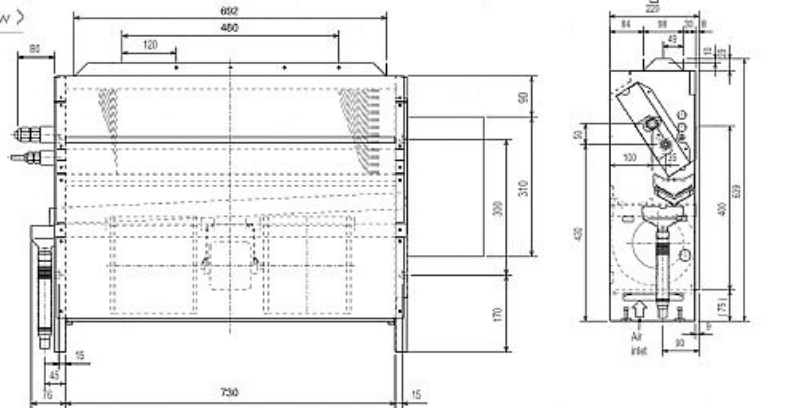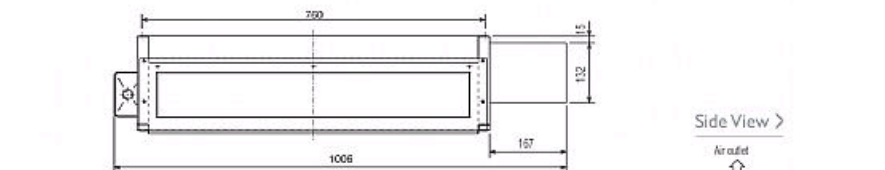

**Telephone: 01707 282880**

Email: [air.conditioning@meuk.mee.com](mailto:air.conditioning@meuk.mee.com) Website: <http://www.mitsubishielectric.co.uk/aircon>

Mitsubishi Electric reserves the right to make any variation in technical specification to the equipment described, or to withdraw or replace products without prior notification or public announcement.

**Tel:**  
**Fax:**








# PFFY-P50VLRM-E

Indoor Unit

Floor Standing Concealed

A compact concealed unit providing simple, effective air conditioning in perimeter zones. The unit is easy to install and at only 220mm deep offers an unobtrusive method of delivering highly efficient air-conditioning performance.

- **Concealed unit for hidden installation**
- **Ideal for perimeter refurbishments**
- **Cooling operation set temperature can be set down to 14°C db when used with R410A**

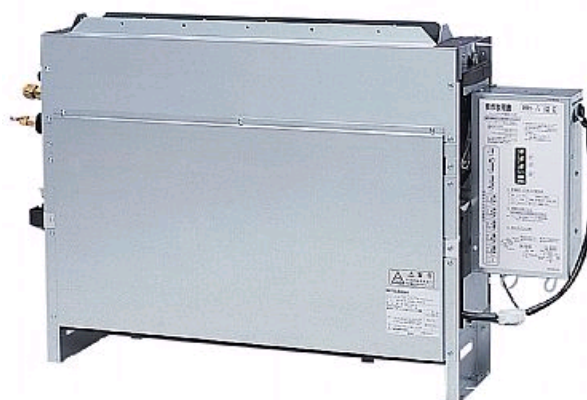


Pictures not to scale

## PFFY-P50VLRM-E

Capacity (kW):	
Heating (Nominal)	6.3
Cooling (Nominal)	5.6
Heating (UK)	6.3
Cooling (UK)	5.3
R410A High Sensible Cooling (UK)	4.1
SHF R410A (UK)	0.74
SHF High Sensible R410A (UK)	0.8
Power Input (kW) Heating (Nominal)	0.085
Power Input (kW) Cooling (Nominal)	0.085
Airflow(m3/min) - Lo-Hi	12-14
Noise (dBA) - Lo-Hi	38-43
Width - mm	1246
Depth - mm	220
Height - mm	639
Weight - kg	25
Electrical Supply	220-240v, 50Hz
Phase	Single
Mains Cable No. Cores	3
Running Current (A) - Heating	0.4
Running Current (A) - Cooling	0.4
Fuse Rating (BS88) - HRC (A)	6

## PFFY-P50VLRM-E

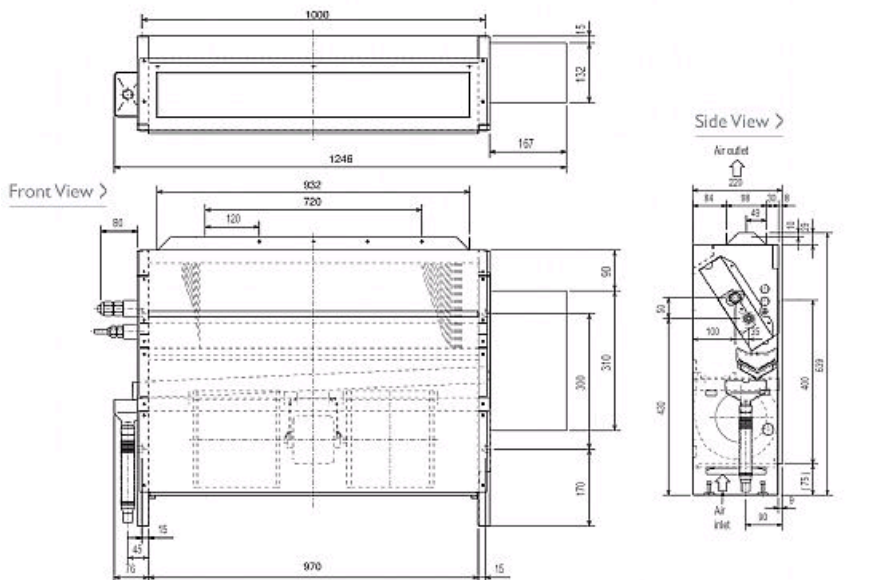

**Telephone: 01707 282880**

Email: [air.conditioning@meuk.mee.com](mailto:air.conditioning@meuk.mee.com) Website: <http://www.mitsubishielectric.co.uk/aircon>

Mitsubishi Electric reserves the right to make any variation in technical specification to the equipment described, or to withdraw or replace products without prior notification or public announcement.

**Tel:**  
**Fax:**






# PFFY-P63VLRM-E

Indoor Unit

Floor Standing Concealed

A compact concealed unit providing simple, effective air conditioning in perimeter zones. The unit is easy to install and at only 220mm deep offers an unobtrusive method of delivering highly efficient air-conditioning performance.

- **Concealed unit for hidden installation**
- **Ideal for perimeter refurbishments**
- **Cooling operation set temperature can be set down to 14°C db when used with R410A**

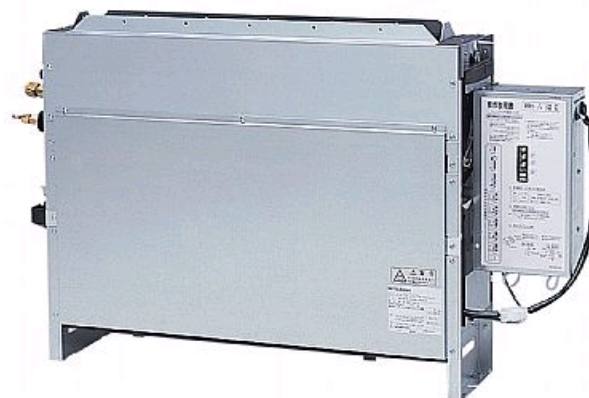

Pictures not to scale


## Product Details

PFFY-P63VLRM-E	
Capacity (kW):	
Heating (Nominal)	8.0
Cooling (Nominal)	7.1
Heating (UK)	8.0
Cooling (UK)	6.7
R410A High Sensible Cooling (UK)	5.2
SHF R410A (UK)	0.73
SHF High Sensible R410A (UK)	0.79
Power Input (kW) Heating (Nominal)	0.1
Power Input (kW) Cooling (Nominal)	0.1
Airflow(m3/min) - Lo-Hi	12-15.5
Noise (dBA) - Lo-Hi	40-46
Width - mm	1246
Depth - mm	220
Height - mm	639
Weight - kg	27
Electrical Supply	220-240v, 50Hz
Phase	Single
Mains Cable No. Cores	3
Running Current (A) - Heating	0.46
Running Current (A) - Cooling	0.46
Fuse Rating (BS88) - HRC (A)	6


## Dimensions

PFFY-P63VLRM-E


Upper View >

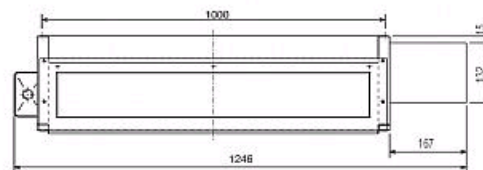

Front View >

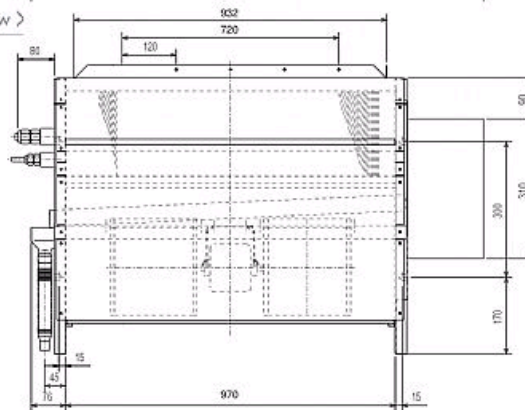

Side View >

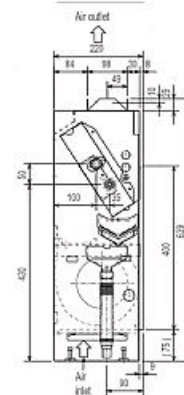

**Telephone: 01707 282880**

Email: [air.conditioning@meuk.mee.com](mailto:air.conditioning@meuk.mee.com) Website: <http://www.mitsubishielectric.co.uk/aircon>

Mitsubishi Electric reserves the right to make any variation in technical specification to the equipment described, or to withdraw or replace products without prior notification or public announcement.

**Tel:**  
**Fax:**

