



PURY-P200YJM-A


Standard R2 Series 8hp Outdoor Unit

R410A Heat Recovery

Many buildings require cooling in some areas and heating in others - even in adjacent rooms. The outstanding City Multy R2 system meets this requirement by distributing surplus heat from cooling operations (and vice versa) to rooms where it is needed. This efficiency can result in energy savings of up to 30% over conventional systems.



Pictures not to scale



Product Details


PURY-P200YJM-A	
Capacity (kW):	
Heating (Nominal)	25.0
Cooling (Nominal)	22.4
Heating (UK)	25.0
Cooling (UK)	21.3
Power Input (kW) Heating (Nominal)	5.69
Power Input (kW) Cooling (Nominal)	5.18
Power Input (kW) Heating (UK)	7.17
Power Input (kW) Cooling (UK)	2.98
Max No. of Connectable Indoor Units	20
Airflow(m ³ /min)	185
Noise (dBA)	56
Width - mm	920
Depth - mm	760
Height - mm	1710
Weight - kg	240
Electrical Supply	380-415v, 50Hz
Phase	3
Mains Cable No. Cores	4 + earth
Starting Current (A)	8
Running Current (A) - Heating	8.7
Running Current (A) - Cooling	8
Fuse Rating (BS88) - HRC (A)	20

Piping Restrictions

Total Piping Length (m)	550
Furthest Piping Length (m)	165
Between Outdoor and BC Controller - Length (m)	110
Between Indoor and Outdoor Units - Height (m)	50
Between Indoor and Indoor Units - Height (m)	15

Dimensions

PURY-P200YJM-A

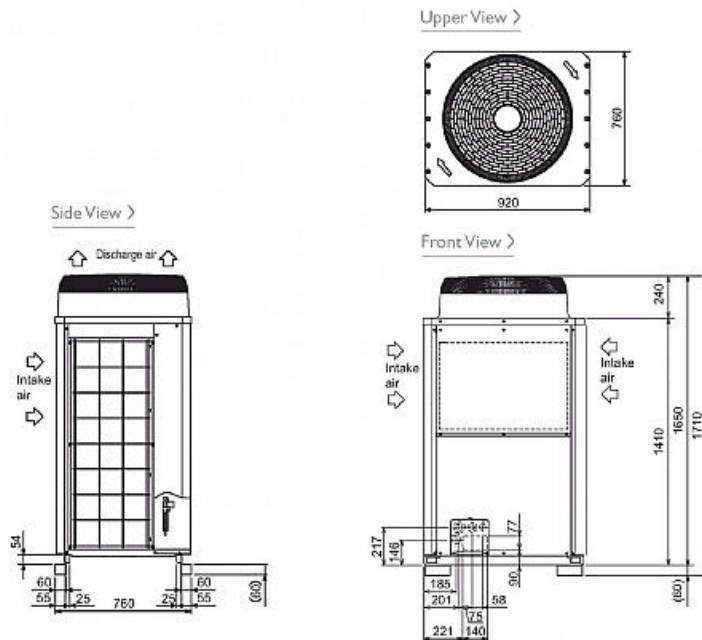

Telephone: 01707 282880

Email: air.conditioning@meuk.mee.com Website: <http://www.mitsubishielectric.co.uk/aircon>

Mitsubishi Electric reserves the right to make any variation in technical specification to the equipment described, or to withdraw or replace products without prior notification or public announcement.

Tel:
Fax:





PURY-P250YJM-A


Standard R2 Series 10hp Outdoor Unit

R410A Heat Recovery

Many buildings require cooling in some areas and heating in others - even in adjacent rooms. The outstanding City Multy R2 system meets this requirement by distributing surplus heat from cooling operations (and vice versa) to rooms where it is needed. This efficiency can result in energy savings of up to 30% over conventional systems.



Pictures not to scale




Product Details

PURY-P250YJM-A	
Capacity (kW):	
Heating (Nominal)	31.5
Cooling (Nominal)	28.0
Heating (UK)	31.5
Cooling (UK)	26.6
Power Input (kW) Heating (Nominal)	7.32
Power Input (kW) Cooling (Nominal)	7.05
Power Input (kW) Heating (UK)	9.22
Power Input (kW) Cooling (UK)	4.05
Max No. of Connectable Indoor Units	25
Airflow(m ³ /min)	185
Noise (dBA)	57
Width - mm	920
Depth - mm	760
Height - mm	1710
Weight - kg	240
Electrical Supply	380-415v, 50Hz
Phase	3
Mains Cable No. Cores	4 + earth
Starting Current (A)	8
Running Current (A) - Heating	11.3
Running Current (A) - Cooling	10.8
Fuse Rating (BS88) - HRC (A)	20

Piping Restrictions	
Total Piping Length (m)	550
Furthest Piping Length (m)	165
Between Outdoor and BC Controller - Length (m)	110
Between Indoor and Outdoor Units - Height (m)	50
Between Indoor and Indoor Units - Height (m)	15

Dimensions

PURY-P200YJM-A

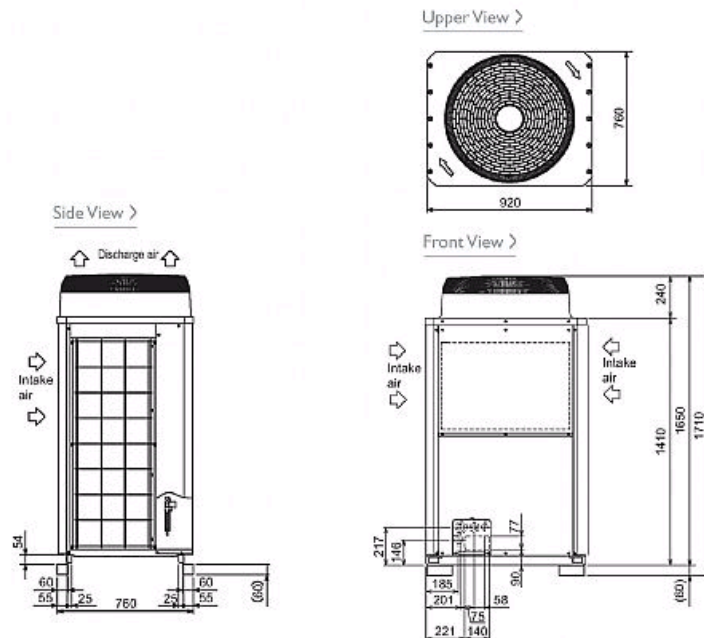

Telephone: 01707 282880

Email: air.conditioning@meuk.mee.com Website: <http://www.mitsubishielectric.co.uk/aircon>

Mitsubishi Electric reserves the right to make any variation in technical specification to the equipment described, or to withdraw or replace products without prior notification or public announcement.

Tel:
Fax:





PURY-P300YJM-A


Standard R2 Series 12hp Outdoor Unit

R410A Heat Recovery

Many buildings require cooling in some areas and heating in others - even in adjacent rooms. The outstanding City Multy R2 system meets this requirement by distributing surplus heat from cooling operations (and vice versa) to rooms where it is needed. This efficiency can result in energy savings of up to 30% over conventional systems.



Pictures not to scale



Product Details


PURY-P300YJM-A	
Capacity (kW):	
Heating (Nominal)	37.5
Cooling (Nominal)	33.5
Heating (UK)	35.6
Cooling (UK)	31.5
Power Input (kW) Heating (Nominal)	8.78
Power Input (kW) Cooling (Nominal)	8.67
Power Input (kW) Heating (UK)	11.77
Power Input (kW) Cooling (UK)	5.59
Max No. of Connectable Indoor Units	30
Airflow(m ³ /min)	185
Noise (dBA)	59
Width - mm	920
Depth - mm	760
Height - mm	1710
Weight - kg	245
Electrical Supply	380-415v, 50Hz
Phase	3
Mains Cable No. Cores	4 + earth
Starting Current (A)	8
Running Current (A) - Heating	13.5
Running Current (A) - Cooling	13.4
Fuse Rating (BS88) - HRC (A)	25

Piping Restrictions

Total Piping Length (m)	550
Furthest Piping Length (m)	165
Between Outdoor and BC Controller - Length (m)	110
Between Indoor and Outdoor Units - Height (m)	50
Between Indoor and Indoor Units - Height (m)	15

Dimensions

PURY-P300YJM-A

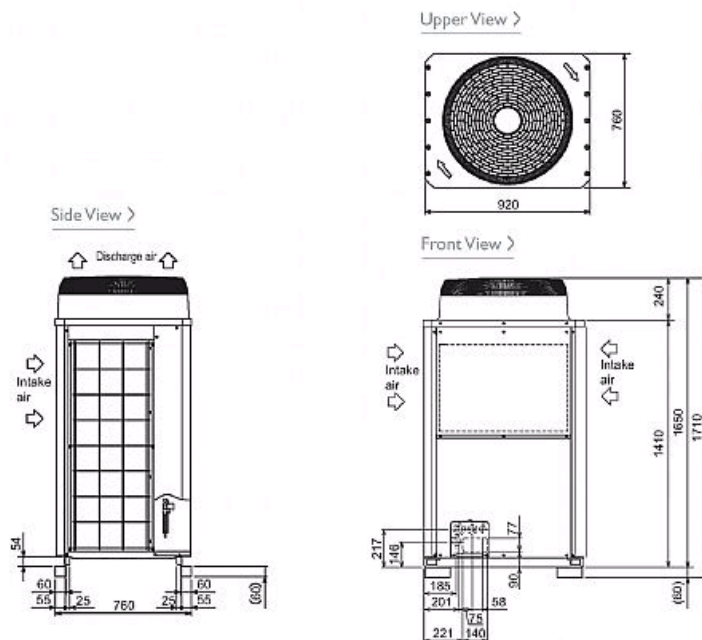

Telephone: 01707 282880

Email: air.conditioning@meuk.mee.com Website: <http://www.mitsubishielectric.co.uk/aircon>

Mitsubishi Electric reserves the right to make any variation in technical specification to the equipment described, or to withdraw or replace products without prior notification or public announcement.

Tel:
Fax:





PURY-P350YJM-A


Standard R2 Series 14hp Outdoor Unit

R410A Heat Recovery

Many buildings require cooling in some areas and heating in others - even in adjacent rooms. The outstanding City Multi R2 system meets this requirement by distributing surplus heat from cooling operations (and vice versa) to rooms where it is needed. This efficiency can result in energy savings of up to 30% over conventional systems.



Pictures not to scale




Product Details

PURY-P350YJM-A	
Capacity (kW):	
Heating (Nominal)	45.0
Cooling (Nominal)	40.0
Heating (UK)	42.8
Cooling (UK)	37.6
Power Input (kW) Heating (Nominal)	10.89
Power Input (kW) Cooling (Nominal)	11.33
Power Input (kW) Heating (UK)	14.59
Power Input (kW) Cooling (UK)	7.31
Max No. of Connectable Indoor Units	35
Airflow(m ³ /min)	225
Noise (dBA)	60
Width - mm	1220
Depth - mm	760
Height - mm	1710
Weight - kg	270
Electrical Supply	380-415v, 50Hz
Phase	3
Mains Cable No. Cores	4 + earth
Starting Current (A)	8
Running Current (A) - Heating	16.8
Running Current (A) - Cooling	17.5
Fuse Rating (BS88) - HRC (A)	32

Piping Restrictions	
Total Piping Length (m)	600
Furthest Piping Length (m)	165
Between Outdoor and BC Controller - Length (m)	110
Between Indoor and Outdoor Units - Height (m)	50
Between Indoor and Indoor Units - Height (m)	15

Dimensions

PURY-P350YJM-A

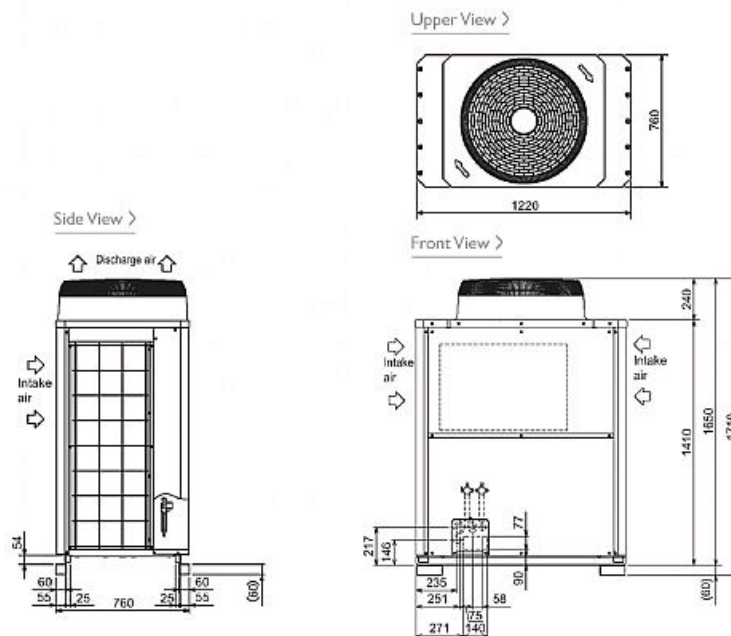

Telephone: 01707 282880

Email: air.conditioning@meuk.mee.com Website: <http://www.mitsubishielectric.co.uk/aircon>

Mitsubishi Electric reserves the right to make any variation in technical specification to the equipment described, or to withdraw or replace products without prior notification or public announcement.

Tel:
Fax:





PURY-P400YJM-A


Standard R2 Series 16hp Outdoor Unit

R410A Heat Recovery

Many buildings require cooling in some areas and heating in others - even in adjacent rooms. The outstanding City Multi R2 system meets this requirement by distributing surplus heat from cooling operations (and vice versa) to rooms where it is needed. This efficiency can result in energy savings of up to 30% over conventional systems.



Pictures not to scale




Product Details

PURY-P400YJM-A	
Capacity (kW):	
Heating (Nominal)	50.0
Cooling (Nominal)	45.0
Heating (UK)	47.5
Cooling (UK)	42.3
Power Input (kW) Heating (Nominal)	12.75
Power Input (kW) Cooling (Nominal)	13.55
Power Input (kW) Heating (UK)	17.09
Power Input (kW) Cooling (UK)	8.74
Max No. of Connectable Indoor Units	40
Airflow(m3/min)	225
Noise (dBA)	61
Width - mm	1220
Depth - mm	760
Height - mm	1710
Weight - kg	270
Electrical Supply	380-415v, 50Hz
Phase	3
Mains Cable No. Cores	4 + earth
Starting Current (A)	8
Running Current (A) - Heating	19.7
Running Current (A) - Cooling	20.9
Fuse Rating (BS88) - HRC (A)	40

Piping Restrictions	
Total Piping Length (m)	600
Furthest Piping Length (m)	165
Between Outdoor and BC Controller - Length (m)	110
Between Indoor and Outdoor Units - Height (m)	50
Between Indoor and Indoor Units - Height (m)	15

Dimensions

PURY-P400YJM-A

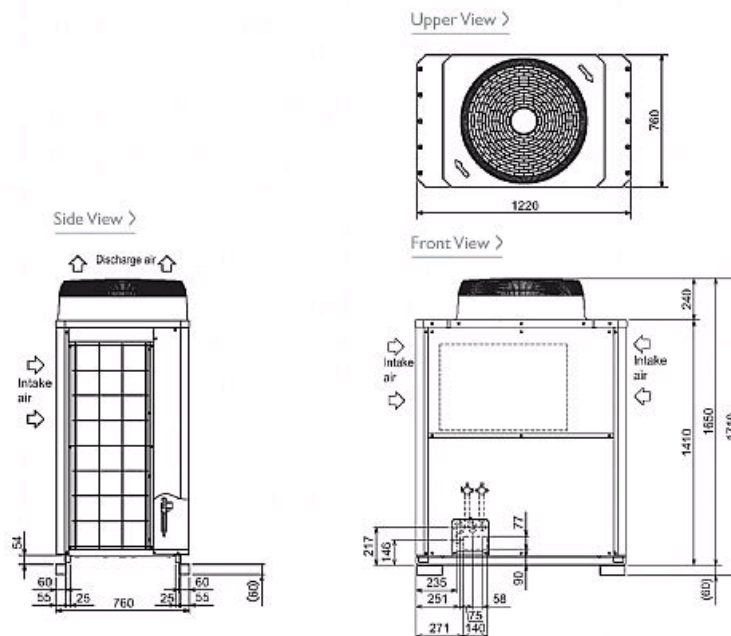

Telephone: 01707 282880

Email: air.conditioning@meuk.mee.com Website: <http://www.mitsubishielectric.co.uk/aircon>

Mitsubishi Electric reserves the right to make any variation in technical specification to the equipment described, or to withdraw or replace products without prior notification or public announcement.

Tel:
Fax:





PURY-P450YJM-A1

Standard R2 Series 18hp Outdoor Unit

R410A Heat Recovery

Many buildings require cooling in some areas and heating in others - even in adjacent rooms. The outstanding City Multi R2 system meets this requirement by highly efficiently distributing surplus heat from cooling operations (and vice versa) to rooms where it is needed. This efficiency can result in energy savings of up to 30% over conventional systems.



Pictures not to scale



Product Details


PURY-P450YJM-A1	
Capacity (kW):	
Heating (Nominal)	56.0
Cooling (Nominal)	50.0
Heating (UK)	50.7
Cooling (UK)	46.0
Power Input (kW) Heating (Nominal)	13.3
Power Input (kW) Cooling (Nominal)	12.5
Power Input (kW) Heating (UK)	15.16
Power Input (kW) Cooling (UK)	7.88
Max No. of Connectable Indoor Units	45
Airflow(m3/min)	185 /185
Noise (dBA)	59.5
Width - mm	920 + 920
Depth - mm	760
Height - mm	1710
Weight - kg	240 + 240
Electrical Supply	380-415v, 50Hz
Phase	3
Mains Cable No. Cores	4 + earth
Starting Current (A)	8
Running Current (A) - Heating	20.5
Running Current (A) - Cooling	19.3

Piping Restrictions

Total Piping Length (m)	600
Furthest Piping Length (m)	165
Between Outdoor and BC Controller - Length (m)	110
Between Indoor and Outdoor Units - Height (m)	50
Between Indoor and Indoor Units - Height (m)	15

Dimensions

PURY-P450YJM-A1

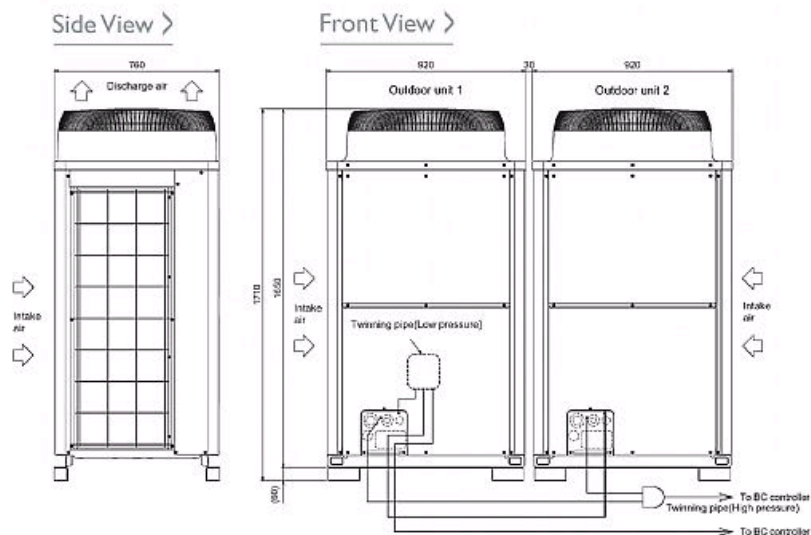

Telephone: 01707 282880

Email: air.conditioning@meuk.mee.com Website: <http://www.mitsubishielectric.co.uk/aircon>

Mitsubishi Electric reserves the right to make any variation in technical specification to the equipment described, or to withdraw or replace products without prior notification or public announcement.

Tel:
Fax:





PURY-P500YSJM-A

Standard R2 Series 20hp Outdoor Unit

R410A Heat Recovery

Many buildings require cooling in some areas and heating in others - even in adjacent rooms. The outstanding City Multi R2 system meets this requirement by distributing surplus heat from cooling operations (and vice versa) to rooms where it is needed. This efficiency can result in energy savings of up to 30% over conventional systems.



Pictures not to scale



Product Details


PURY-P500YSJM-A	
Capacity (kW):	
Heating (Nominal)	63.0
Cooling (Nominal)	56.0
Heating (UK)	57.0
Cooling (UK)	51.5
Power Input (kW) Heating (Nominal)	15.1
Power Input (kW) Cooling (Nominal)	14.85
Power Input (kW) Heating (UK)	17.21
Power Input (kW) Cooling (UK)	9.36
Max No. of Connectable Indoor Units	50
Airflow(m3/min)	185 /185
Noise (dBA)	60
Width - mm	920 + 920
Depth - mm	760
Height - mm	1710
Weight - kg	240 + 240
Electrical Supply	380-415v, 50Hz
Phase	3
Mains Cable No. Cores	4 + earth
Starting Current (A)	8
Running Current (A) - Heating	23.3
Running Current (A) - Cooling	22.9

Piping Restrictions

Total Piping Length (m)	750
Furthest Piping Length (m)	165
Between Outdoor and BC Controller - Length (m)	110
Between Indoor and Outdoor Units - Height (m)	50
Between Indoor and Indoor Units - Height (m)	15

Dimensions

PURY-P500YSJM-A

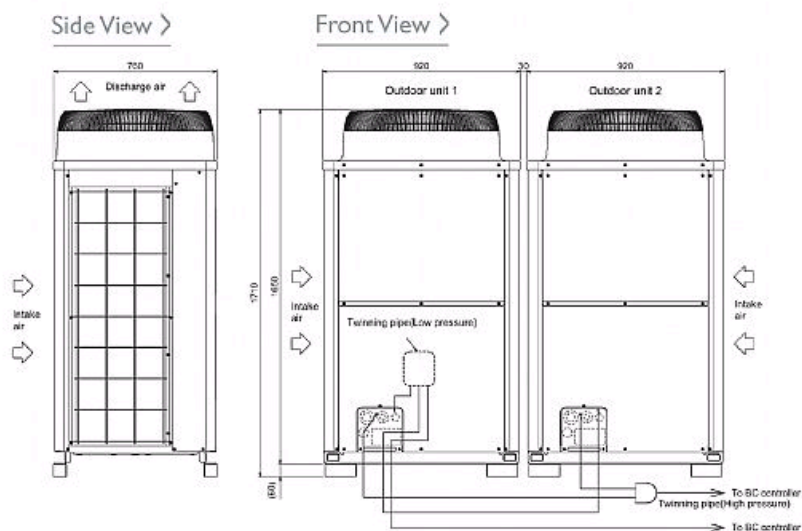

Telephone: 01707 282880

Email: air.conditioning@meuk.mee.com Website: <http://www.mitsubishielectric.co.uk/aircon>

Mitsubishi Electric reserves the right to make any variation in technical specification to the equipment described, or to withdraw or replace products without prior notification or public announcement.

Tel:
Fax:





PURY-P550YSJM-A


Standard R2 Series 22hp Outdoor Unit

R410A Heat Recovery

Many buildings require cooling in some areas and heating in others - even in adjacent rooms. The outstanding City Multi R2 system meets this requirement by distributing surplus heat from cooling operations (and vice versa) to rooms where it is needed. This efficiency can result in energy savings of up to 30% over conventional systems.



Pictures not to scale




Product Details

PURY-P550YSJM-A	
Capacity (kW):	
Heating (Nominal)	69.0
Cooling (Nominal)	63.0
Heating (UK)	62.4
Cooling (UK)	58.0
Power Input (kW) Heating (Nominal)	16.95
Power Input (kW) Cooling (Nominal)	17.3
Power Input (kW) Heating (UK)	19.32
Power Input (kW) Cooling (UK)	10.9
Max No. of Connectable Indoor Units	50
Airflow(m3/min)	185 /185
Noise (dBA)	61
Width - mm	920 + 920
Depth - mm	760
Height - mm	1710
Weight - kg	245 + 240
Electrical Supply	380-415v, 50Hz
Phase	3
Starting Current (A)	8
Running Current (A) - Heating	26.2
Running Current (A) - Cooling	26.7

Piping Restrictions	
Total Piping Length (m)	750
Furthest Piping Length (m)	165
Between Outdoor and BC Controller - Length (m)	110
Between Indoor and Outdoor Units - Height (m)	50
Between Indoor and Indoor Units - Height (m)	15

Dimensions

PURY-P550YSJM-A

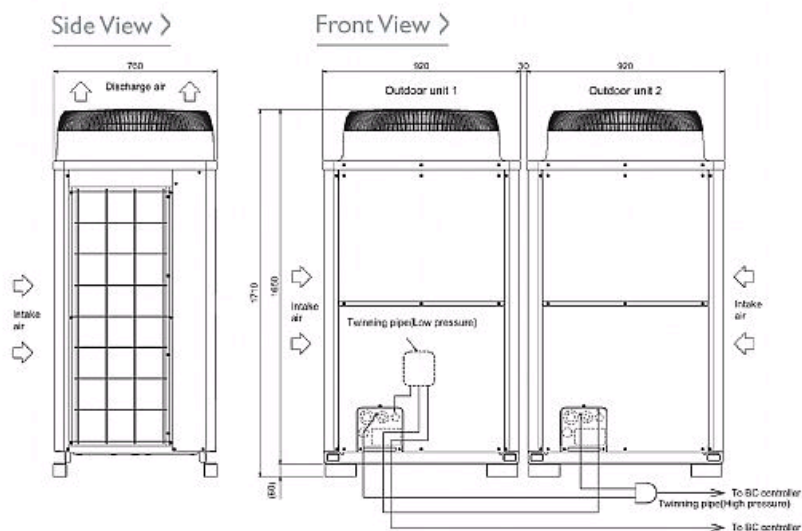

Telephone: 01707 282880

Email: air.conditioning@meuk.mee.com Website: <http://www.mitsubishielectric.co.uk/aircon>

Mitsubishi Electric reserves the right to make any variation in technical specification to the equipment described, or to withdraw or replace products without prior notification or public announcement.

Tel:
Fax:





PURY-P600YSJM-A


Standard R2 Series 24hp Outdoor Unit

R410A Heat Recovery

Many buildings require cooling in some areas and heating in others - even in adjacent rooms. The outstanding City Multi R2 system meets this requirement by distributing surplus heat from cooling operations (and vice versa) to rooms where it is needed. This efficiency can result in energy savings of up to 30% over conventional systems.



Pictures not to scale



Product Details


PURY-P600YSJM-A	
Capacity (kW):	
Heating (Nominal)	76.5
Cooling (Nominal)	69.0
Heating (UK)	69.2
Cooling (UK)	63.5
Power Input (kW) Heating (Nominal)	19.07
Power Input (kW) Cooling (Nominal)	19.65
Power Input (kW) Heating (UK)	21.74
Power Input (kW) Cooling (UK)	12.38
Max No. of Connectable Indoor Units	50
Airflow(m3/min)	185 /185
Noise (dBA)	62
Width - mm	920 + 920
Depth - mm	760
Height - mm	1710
Weight - kg	245 + 245
Electrical Supply	380-415v, 50Hz
Phase	3
Mains Cable No. Cores	4 + earth
Starting Current (A)	8
Running Current (A) - Heating	29.4
Running Current (A) - Cooling	30.3

Piping Restrictions

Total Piping Length (m)	800
Furthest Piping Length (m)	165
Between Outdoor and BC Controller - Length (m)	110
Between Indoor and Outdoor Units - Height (m)	50
Between Indoor and Indoor Units - Height (m)	15

Dimensions

PURY-P600YSJM-A

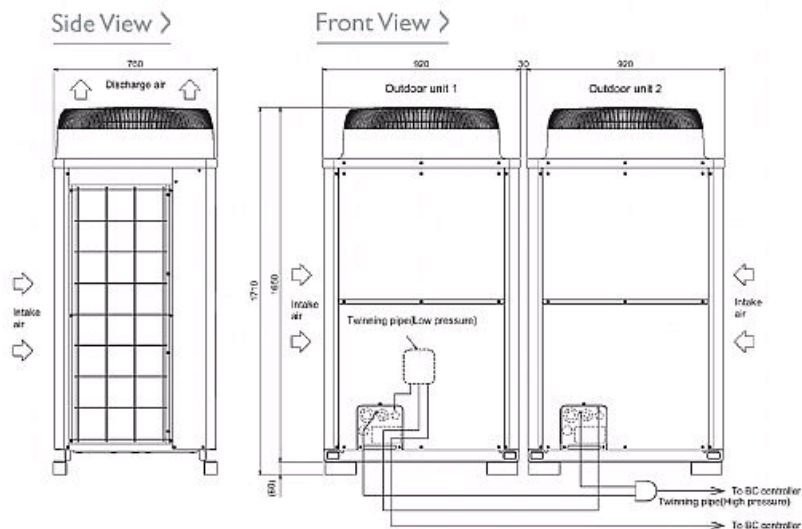

Telephone: 01707 282880

Email: air.conditioning@meuk.mee.com Website: <http://www.mitsubishielectric.co.uk/aircon>

Mitsubishi Electric reserves the right to make any variation in technical specification to the equipment described, or to withdraw or replace products without prior notification or public announcement.

Tel:
Fax:





[Home](#) > [Products](#) > [City Multi \(VRF\)](#) > [Outdoor](#) > [R410A Standard Heat Recovery](#) >

PURY-P650YSJM-A Standard R2

Series 26hp Outdoor Unit

Many buildings require cooling in some areas and heating in others - even in adjacent rooms. The outstanding City Multi R2 system meets this requirement by distributing surplus heat from cooling operations (and vice versa) to rooms where it is needed. This efficiency can result in energy savings of up to 30% over conventional systems.

Model Info



Hover your mouse over the red icons below to view a description of each feature:




PURY-P650YSJM-A

Capacity (kW):	
Heating (Nominal)	81.5
Cooling (Nominal)	73.0
Heating (UK)	73.8
Cooling (UK)	67.2
Power Input (kW) Heating (Nominal)	20.47
Power Input (kW) Cooling (Nominal)	21.53
Power Input (kW) Heating (UK)	23.34
Power Input (kW) Cooling (UK)	13.56
Max No. of Connectable Indoor Units	50
Airflow(m3/min)	225 /185
Noise (dBA)	62.5
Width - mm	1220
Depth - mm	760

Dimensions

PURY-P650YSJM-A (Click to [\[Print\]](#) enlarge).

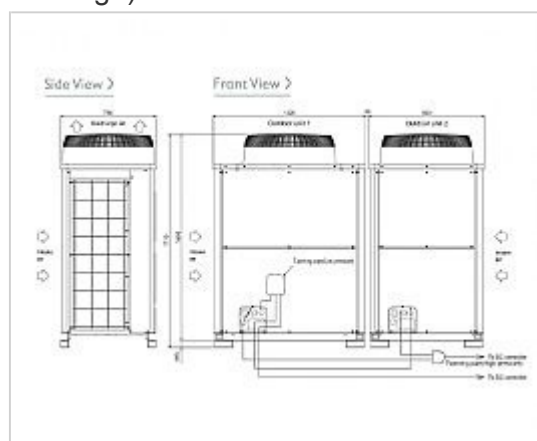

Height - mm	1710
Weight - kg	270 + 245
Electrical Supply	380-415v, 50Hz
Phase	3
Mains Cable No. Cores	4 + earth
Starting Current (A)	8
Running Current (A) - Heating	31.6
Running Current (A) - Cooling	33.2

Piping Restrictions

Total Piping Length (m)	800
Furthest Piping Length (m)	165
Between Outdoor and BC Controller - Length (m)	110
Between Indoor and Outdoor Units - Height (m)	50
Between Indoor and Indoor Units - Height (m)	15

Powered by Enable Software



PURY-P800YSJM-A

Standard R2 Series 32hp Outdoor Unit

R410A Heat Recovery

Many buildings require cooling in some areas and heating in others - even in adjacent rooms. The outstanding City Multi R2 system meets this requirement by distributing surplus heat from cooling operations (and vice versa) to rooms where it is needed. This efficiency can result in energy savings of up to 30% over conventional systems.



Pictures not to scale



Product Details


PURY-P800YSJM-A	
Capacity (kW):	
Heating (Nominal)	95.0
Cooling (Nominal)	85.0
Heating (UK)	95.0
Cooling (UK)	78.2
Power Input (kW) Heating (Nominal)	26.04
Power Input (kW) Cooling (Nominal)	28.3
Power Input (kW) Heating (UK)	32.81
Power Input (kW) Cooling (UK)	18.25
Max No. of Connectable Indoor Units	50
Airflow(m3/min)	225 /225
Noise (dBA)	63.5
Width - mm	1220 + 1220
Depth - mm	760
Height - mm	1710
Weight - kg	270 + 270
Electrical Supply	380-415v, 50Hz
Phase	3
Mains Cable No. Cores	4 + earth
Starting Current (A)	8
Running Current (A) - Heating	40.2
Running Current (A) - Cooling	43.7

Piping Restrictions

Total Piping Length (m)	950
Furthest Piping Length (m)	165
Between Outdoor and BC Controller - Length (m)	110
Between Indoor and Outdoor Units - Height (m)	50
Between Indoor and Indoor Units - Height (m)	15

Dimensions

PURY-P800YSJM-A

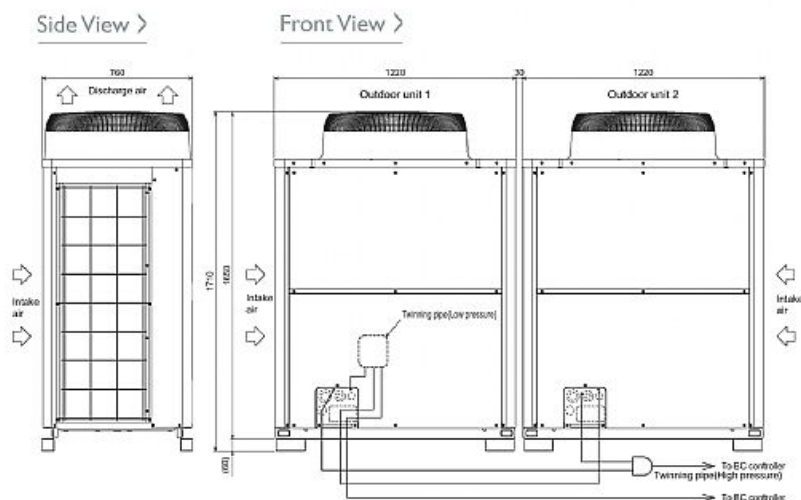

Telephone: 01707 282880

Email: air.conditioning@meuk.mee.com Website: <http://www.mitsubishielectric.co.uk/aircon>

Mitsubishi Electric reserves the right to make any variation in technical specification to the equipment described, or to withdraw or replace products without prior notification or public announcement.

Tel:
Fax:





PURY-P900YSJM-A

Standard R2 Series 36hp Outdoor Unit

R410A Heat Recovery

Many buildings require cooling in some areas and heating in others - even in adjacent rooms. The outstanding City Multi R2 system meets this requirement by highly efficiently distributing surplus heat from cooling operations (and vice versa) to rooms where it is needed. This efficiency can result in energy savings of up to 30% over conventional systems.



Pictures not to scale



Product Details


PURY-P900YSJM-A	
Capacity (kW):	
Heating (Nominal)	113.0
Cooling (Nominal)	101.0
Heating (UK)	107.4
Cooling (UK)	92.9
Power Input (kW) Heating (Nominal)	30.05
Power Input (kW) Cooling (Nominal)	30.23
Power Input (kW) Heating (UK)	39.97
Power Input (kW) Cooling (UK)	18.44
Max No. of Connectable Indoor Units	50
Airflow(m3/min)	360 /360
Noise (dBA)	65
Width - mm	1750 + 1750
Depth - mm	760
Height - mm	1710
Weight - kg	320 + 320
Electrical Supply	380-415v, 50Hz
Phase	3
Mains Cable No. Cores	4 + earth
Starting Current (A)	8
Running Current (A) - Heating	46.4
Running Current (A) - Cooling	46.7

Piping Restrictions

Total Piping Length (m)	950
Furthest Piping Length (m)	165
Between Outdoor and BC Controller - Length (m)	110
Between Indoor and Outdoor Units - Height (m)	50
Between Indoor and Indoor Units - Height (m)	15

Dimensions

PURY-P900YSJM-A

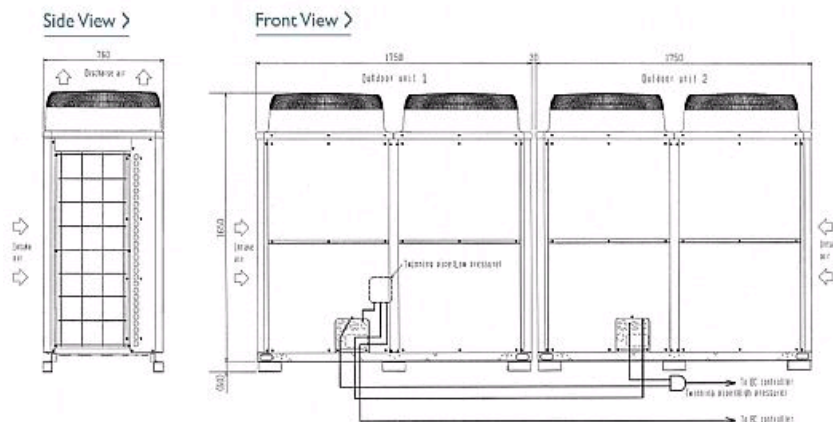

Telephone: 01707 282880

Email: air.conditioning@meuk.mee.com Website: <http://www.mitsubishielectric.co.uk/aircon>

Mitsubishi Electric reserves the right to make any variation in technical specification to the equipment described, or to withdraw or replace products without prior notification or public announcement.

Tel:
Fax:

