



# PKFY-P15VBM-E

Indoor Unit


Wall Mounted

An elegant design combined with compact dimensions and quiet operation make the PKFY-P an ideal unit choice. Noise levels are significantly reduced thanks to a unique airflow passage design that not only makes the unit one of the quietest in the industry, but also suppresses condensation and prevents mixing with secondary air.

- **Compact design**
- **Front grille opening for easy cleaning**
- **Front power supply for easy wiring after installation**
- **5-way piping provides more flexibility in selection of installation sites**



Pictures not to scale




## Product Details

| PKFY-P15VBM-E                      |                |
|------------------------------------|----------------|
| Capacity (kW):                     |                |
| Heating (Nominal)                  | 1.9            |
| Cooling (Nominal)                  | 1.7            |
| Heating (UK)                       | 1.8            |
| Cooling (UK)                       | 1.6            |
| R410A High Sensible Cooling (UK)   | 1.2            |
| SHF R410A (UK)                     | 0.75           |
| SHF High Sensible R410A (UK)       | 0.83           |
| Power Input (kW) Heating (Nominal) | 0.04           |
| Power Input (kW) Cooling (Nominal) | 0.04           |
| Airflow(m3/min) - Lo-Mi1-Mi2-Hi    | 4.9-5-5.2-5.3  |
| Noise (dBA) - Lo-Mi1-Mi2-Hi        | 29-31-32-33    |
| Width - mm                         | 815            |
| Depth - mm                         | 225            |
| Height - mm                        | 295            |
| Weight - kg                        | 10             |
| Electrical Supply                  | 220-240v, 50Hz |
| Phase                              | Single         |
| Mains Cable No. Cores              | 3              |
| Running Current (A) - Heating      | 0.2            |
| Running Current (A) - Cooling      | 0.2            |
| Fuse Rating (BS88) - HRC (A)       | 6              |

## Dimensions

PKFY-P15VBM-E

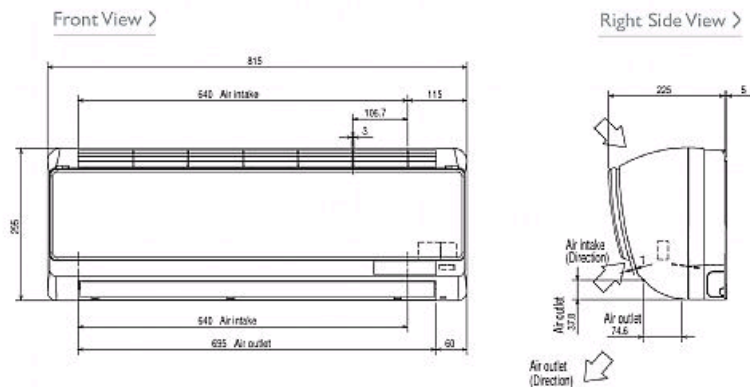

PKFY-P20, 25VBM-E



**Telephone: 01707 282880**

Email: [air.conditioning@meuk.mee.com](mailto:air.conditioning@meuk.mee.com) Website: <http://www.mitsubishielectric.co.uk/aircon>

Mitsubishi Electric reserves the right to make any variation in technical specification to the equipment described, or to withdraw or replace products without prior notification or public announcement.

**Tel:**  
**Fax:**





# PKFY-P20VBM-E

Indoor Unit

Wall Mounted

An elegant design combined with compact dimensions and quiet operation make the PKFY-P an ideal unit choice. Noise levels are significantly reduced thanks to a unique airflow passage design that not only makes the unit one of the quietest in the industry, but also suppresses condensation and prevents mixing with secondary air.

- **Compact design**
- **Front grille opening for easy cleaning**
- **Front power supply for easy wiring after installation**
- **5-way piping provides more flexibility in selection of installation sites**



Pictures not to scale




## Product Details

| PKFY-P20VBM-E                      |                 |
|------------------------------------|-----------------|
| Capacity (kW):                     |                 |
| Heating (Nominal)                  | 2.5             |
| Cooling (Nominal)                  | 2.2             |
| Heating (UK)                       | 2.3             |
| Cooling (UK)                       | 2.1             |
| R410A High Sensible Cooling (UK)   | 1.6             |
| SHF R410A (UK)                     | 0.71            |
| SHF High Sensible R410A (UK)       | 0.75            |
| Power Input (kW) Heating (Nominal) | 0.04            |
| Power Input (kW) Cooling (Nominal) | 0.04            |
| Airflow(m3/min) - Lo-Mi1-Mi2-Hi    | 4.9-5.2-5.6-5.9 |
| Noise (dBA) - Lo-Mi1-Mi2-Hi        | 29-31-34-36     |
| Width - mm                         | 815             |
| Depth - mm                         | 225             |
| Height - mm                        | 295             |
| Weight - kg                        | 10              |
| Electrical Supply                  | 220-240v, 50Hz  |
| Phase                              | Single          |
| Mains Cable No. Cores              | 3               |
| Running Current (A) - Heating      | 0.2             |
| Running Current (A) - Cooling      | 0.2             |
| Fuse Rating (BS88) - HRC (A)       | 6               |

## Dimensions

PKFY-P20VBM-E

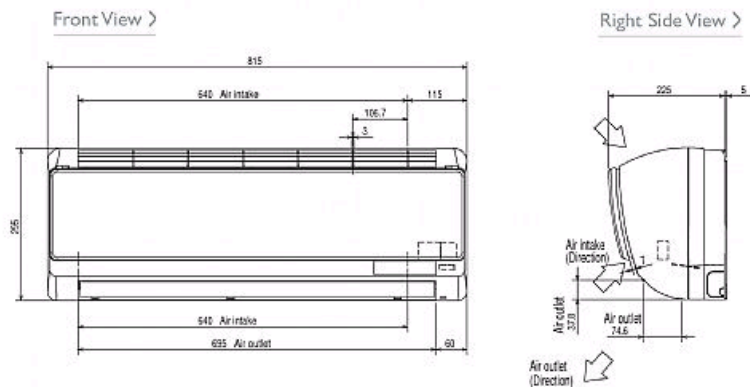

PKFY-P20, 25VBM-E



**Telephone: 01707 282880**

Email: [air.conditioning@meuk.mee.com](mailto:air.conditioning@meuk.mee.com) Website: <http://www.mitsubishielectric.co.uk/aircon>

Mitsubishi Electric reserves the right to make any variation in technical specification to the equipment described, or to withdraw or replace products without prior notification or public announcement.

**Tel:**  
**Fax:**





# PKFY-P25VBM-E

Indoor Unit

Wall Mounted

An elegant design combined with compact dimensions and quiet operation make the PKFY-P an ideal unit choice. Noise levels are significantly reduced thanks to a unique airflow passage design that not only makes the unit one of the quietest in the industry, but also suppresses condensation and prevents mixing with secondary air.

- **Compact design**
- **Front grille opening for easy cleaning**
- **Front power supply for easy wiring after installation**
- **5-way piping provides more flexibility in selection of installation sites**



Pictures not to scale




## Product Details

| PKFY-P25VBM-E                      |                 |
|------------------------------------|-----------------|
| Capacity (kW):                     |                 |
| Heating (Nominal)                  | 3.2             |
| Cooling (Nominal)                  | 2.8             |
| Heating (UK)                       | 3.0             |
| Cooling (UK)                       | 2.6             |
| R410A High Sensible Cooling (UK)   | 2.0             |
| SHF R410A (UK)                     | 0.69            |
| SHF High Sensible R410A (UK)       | 0.8             |
| Power Input (kW) Heating (Nominal) | 0.04            |
| Power Input (kW) Cooling (Nominal) | 0.04            |
| Airflow(m3/min) - Lo-Mi1-Mi2-Hi    | 4.9-5.2-5.6-5.9 |
| Noise (dBA) - Lo-Mi1-Mi2-Hi        | 29-31-34-36     |
| Width - mm                         | 815             |
| Depth - mm                         | 225             |
| Height - mm                        | 295             |
| Weight - kg                        | 10              |
| Electrical Supply                  | 220-240v, 50Hz  |
| Phase                              | Single          |
| Mains Cable No. Cores              | 3               |
| Running Current (A) - Heating      | 0.2             |
| Running Current (A) - Cooling      | 0.2             |
| Fuse Rating (BS88) - HRC (A)       | 6               |

## Dimensions

PKFY-P25VBM-E

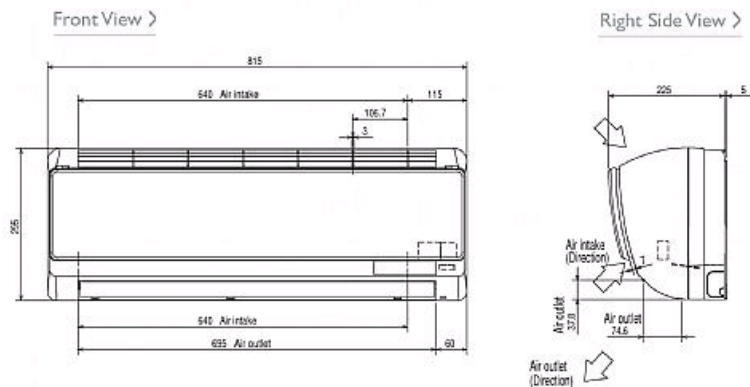

PKFY-P20, 25VBM-E



**Telephone: 01707 282880**

Email: [air.conditioning@meuk.mee.com](mailto:air.conditioning@meuk.mee.com) Website: <http://www.mitsubishielectric.co.uk/aircon>

Mitsubishi Electric reserves the right to make any variation in technical specification to the equipment described, or to withdraw or replace products without prior notification or public announcement.

**Tel:**  
**Fax:**





# PKFY-P32VHM-E

Indoor Unit

Wall Mounted

An elegant design combined with compact dimensions and quiet operation make the PKFY-P an ideal unit choice. Noise levels are significantly reduced thanks to a unique airflow passage design that not only makes the unit one of the quietest in the industry, but also suppresses condensation and prevents mixing with secondary air.

- **Compact design**
- **Front grille opening for easy cleaning**
- **Front power supply for easy wiring after installation**
- **5-way piping provides more flexibility in selection of installation sites**



Pictures not to scale




## Product Details

| PKFY-P32VHM-E                      |                |
|------------------------------------|----------------|
| Capacity (kW):                     |                |
| Heating (Nominal)                  | 4.0            |
| Cooling (Nominal)                  | 3.6            |
| Heating (UK)                       | 4.0            |
| Cooling (UK)                       | 3.4            |
| R410A High Sensible Cooling (UK)   | 2.6            |
| SHF R410A (UK)                     | 0.76           |
| SHF High Sensible R410A (UK)       | 0.85           |
| Power Input (kW) Heating (Nominal) | 0.03           |
| Power Input (kW) Cooling (Nominal) | 0.04           |
| Airflow(m3/min) - Lo-Mi-Hi         | 9-10-11        |
| Noise (dBA) - Lo-Mi-Hi             | 34-37-41       |
| Width - mm                         | 898            |
| Depth - mm                         | 249            |
| Height - mm                        | 295            |
| Weight - kg                        | 13             |
| Electrical Supply                  | 220-240v, 50Hz |
| Phase                              | Single         |
| Mains Cable No. Cores              | 3              |
| Running Current (A) - Heating      | 0.3            |
| Running Current (A) - Cooling      | 0.4            |
| Fuse Rating (BS88) - HRC (A)       | 6              |

## Dimensions

PKFY-P32VHM-E

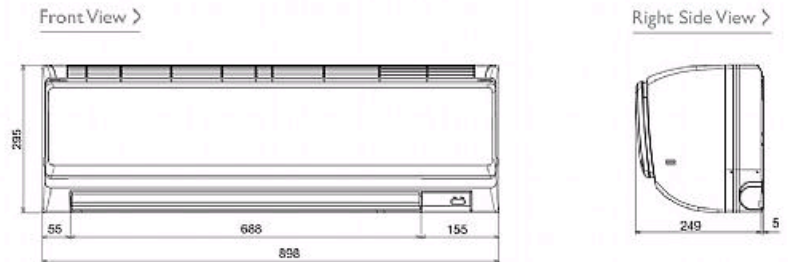

**Telephone: 01707 282880**

Email: [air.conditioning@meuk.mee.com](mailto:air.conditioning@meuk.mee.com) Website: <http://www.mitsubishielectric.co.uk/aircon>

Mitsubishi Electric reserves the right to make any variation in technical specification to the equipment described, or to withdraw or replace products without prior notification or public announcement.

**Tel:**  
**Fax:**





# PKFY-P40VHM-E

Indoor Unit


Wall Mounted

An elegant design combined with compact dimensions and quiet operation make the PKFY-P an ideal unit choice. Noise levels are significantly reduced thanks to a unique airflow passage design that not only makes the unit one of the quietest in the industry, but also suppresses condensation and prevents mixing with secondary air.

- **Compact design**
- **Front grille opening for easy cleaning**
- **Front power supply for easy wiring after installation**
- **5-way piping provides more flexibility in selection of installation sites**



Pictures not to scale




## Product Details

| PKFY-P40VHM-E                      |                |
|------------------------------------|----------------|
| Capacity (kW):                     |                |
| Heating (Nominal)                  | 5.0            |
| Cooling (Nominal)                  | 4.5            |
| Heating (UK)                       | 5.0            |
| Cooling (UK)                       | 4.3            |
| R410A High Sensible Cooling (UK)   | 3.3            |
| SHF R410A (UK)                     | 0.74           |
| SHF High Sensible R410A (UK)       | 0.82           |
| Power Input (kW) Heating (Nominal) | 0.03           |
| Power Input (kW) Cooling (Nominal) | 0.04           |
| Airflow(m3/min) - Lo-Mi-Hi         | 9-10.5-11.5    |
| Noise (dBA) - Lo-Mi-Hi             | 34-38-41       |
| Width - mm                         | 898            |
| Depth - mm                         | 249            |
| Height - mm                        | 295            |
| Weight - kg                        | 13             |
| Electrical Supply                  | 220-240v, 50Hz |
| Phase                              | Single         |
| Mains Cable No. Cores              | 3              |
| Running Current (A) - Heating      | 0.3            |
| Running Current (A) - Cooling      | 0.4            |
| Fuse Rating (BS88) - HRC (A)       | 6              |

## Dimensions

PKFY-P40VHM-E

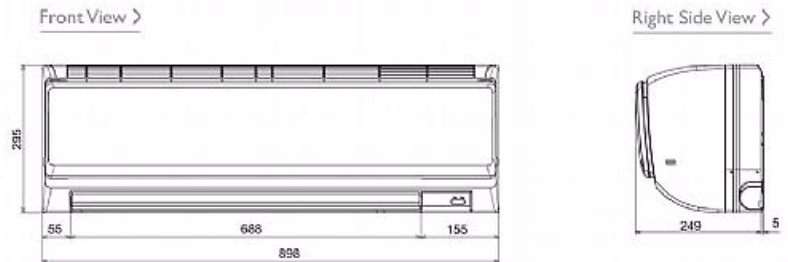

**Telephone: 01707 282880**

Email: [air.conditioning@meuk.mee.com](mailto:air.conditioning@meuk.mee.com) Website: <http://www.mitsubishielectric.co.uk/aircon>

Mitsubishi Electric reserves the right to make any variation in technical specification to the equipment described, or to withdraw or replace products without prior notification or public announcement.

**Tel:**  
**Fax:**





# PKFY-P50VHM-E

Indoor Unit


Wall Mounted

An elegant design combined with compact dimensions and quiet operation make the PKFY-P an ideal unit choice. Noise levels are significantly reduced thanks to a unique airflow passage design that not only makes the unit one of the quietest in the industry, but also suppresses condensation and prevents mixing with secondary air.

- **Compact design**
- **Front grille opening for easy cleaning**
- **Front power supply for easy wiring after installation**
- **5-way piping provides more flexibility in selection of installation sites**



Pictures not to scale




## Product Details

| PKFY-P50VHM-E                      |                |
|------------------------------------|----------------|
| Capacity (kW):                     |                |
| Heating (Nominal)                  | 6.3            |
| Cooling (Nominal)                  | 5.6            |
| Heating (UK)                       | 6.3            |
| Cooling (UK)                       | 5.3            |
| R410A High Sensible Cooling (UK)   | 4.1            |
| SHF R410A (UK)                     | 0.72           |
| SHF High Sensible R410A (UK)       | 0.78           |
| Power Input (kW) Heating (Nominal) | 0.03           |
| Power Input (kW) Cooling (Nominal) | 0.04           |
| Airflow(m3/min) - Lo-Mi-Hi         | 9-10.5-12      |
| Noise (dBA) - Lo-Mi-Hi             | 34-39-43       |
| Width - mm                         | 898            |
| Depth - mm                         | 249            |
| Height - mm                        | 295            |
| Weight - kg                        | 13             |
| Electrical Supply                  | 220-240v, 50Hz |
| Phase                              | Single         |
| Mains Cable No. Cores              | 3              |
| Running Current (A) - Heating      | 0.3            |
| Running Current (A) - Cooling      | 0.4            |
| Fuse Rating (BS88) - HRC (A)       | 6              |

## Dimensions

PKFY-P50VHM-E

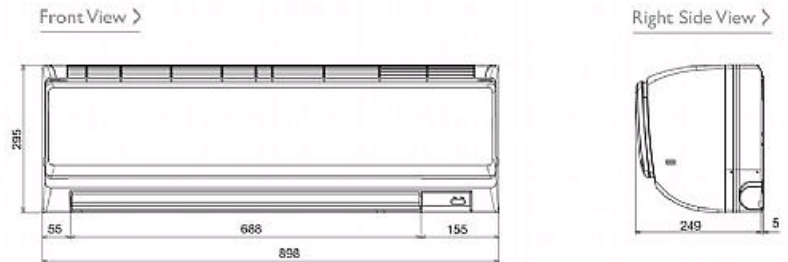

**Telephone: 01707 282880**

Email: [air.conditioning@meuk.mee.com](mailto:air.conditioning@meuk.mee.com) Website: <http://www.mitsubishielectric.co.uk/aircon>

Mitsubishi Electric reserves the right to make any variation in technical specification to the equipment described, or to withdraw or replace products without prior notification or public announcement.

**Tel:**  
**Fax:**





# PKFY-P63VKM-E

Indoor Unit


Wall Mounted

An elegant design combined with compact dimensions and quiet operation make the PKFY-P an ideal unit choice. Noise levels are significantly reduced thanks to a unique airflow passage design that not only makes the unit one of the quietest in the industry, but also suppresses condensation and prevents mixing with secondary air.

- **Compact flat panel design**
- **Front grille opening for easy cleaning**
- **Front power supply for easy wiring after installation**
- **5-way piping provides more flexibility in selection of installation sites**



Pictures not to scale




## Product Details

| PKFY-P63VKM-E                      |                |
|------------------------------------|----------------|
| Capacity (kW):                     |                |
| Heating (Nominal)                  | 8.0            |
| Cooling (Nominal)                  | 7.1            |
| Heating (UK)                       | 8.0            |
| Cooling (UK)                       | 6.7            |
| R410A High Sensible Cooling (UK)   | 5.2            |
| SHF R410A (UK)                     | 0.78           |
| SHF High Sensible R410A (UK)       | 0.85           |
| Power Input (kW) Heating (Nominal) | 0.04           |
| Power Input (kW) Cooling (Nominal) | 0.05           |
| Airflow(m3/min) - Lo-Hi            | 16-20          |
| Noise (dBA) - Lo-Hi                | 39-45          |
| Width - mm                         | 1170           |
| Depth - mm                         | 295            |
| Height - mm                        | 365            |
| Weight - kg                        | 21             |
| Electrical Supply                  | 220-240v, 50Hz |
| Phase                              | Single         |
| Mains Cable No. Cores              | 3              |
| Running Current (A) - Heating      | 0.3            |
| Running Current (A) - Cooling      | 0.37           |
| Fuse Rating (BS88) - HRC (A)       | 6              |

## Dimensions

PKFY-P63VKM-E

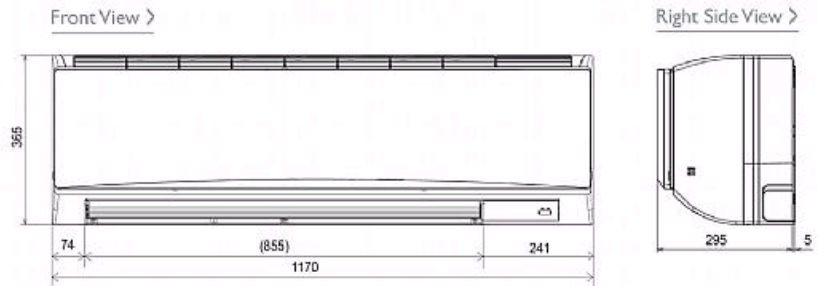

**Telephone: 01707 282880**

Email: [air.conditioning@meuk.mee.com](mailto:air.conditioning@meuk.mee.com) Website: <http://www.mitsubishielectric.co.uk/aircon>

Mitsubishi Electric reserves the right to make any variation in technical specification to the equipment described, or to withdraw or replace products without prior notification or public announcement.

**Tel:**  
**Fax:**

