



7.4 CH-Box dimensions

CH-AP160SSX

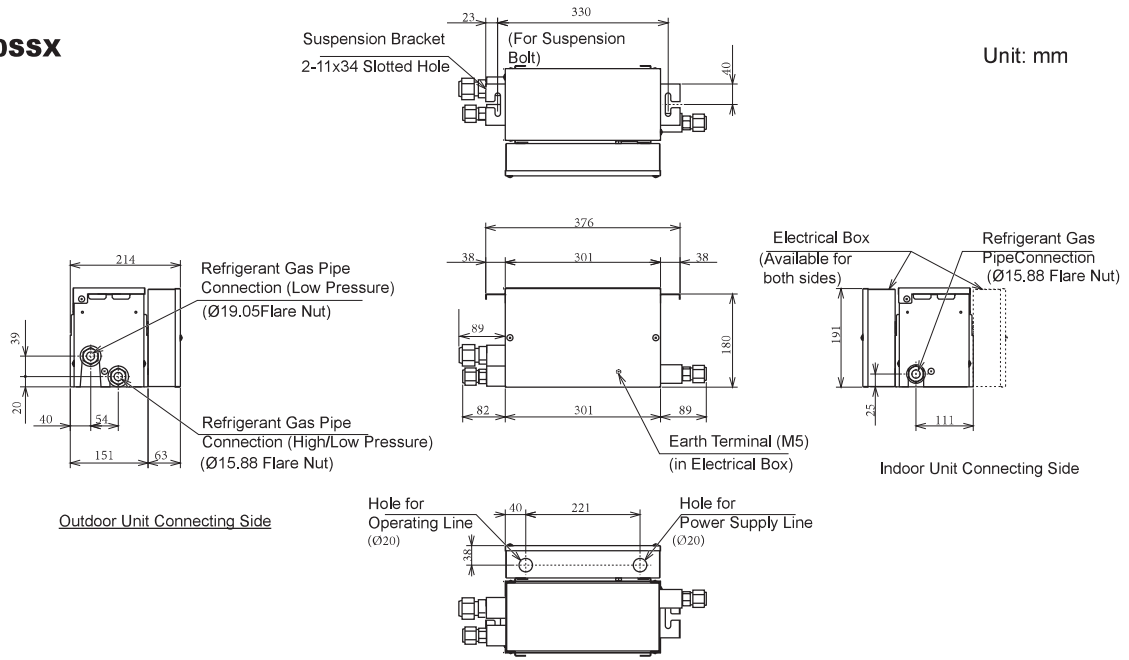

Power Supply	AC 1~ 220-240V 50Hz	Net Weight (kg)	6
Power consumption	5W	Number of connectable indoor units	1 to 7
Refrigerant	R410A	Number of Indoor unit total capacity	6.0HP or less


CH-AP280SSX

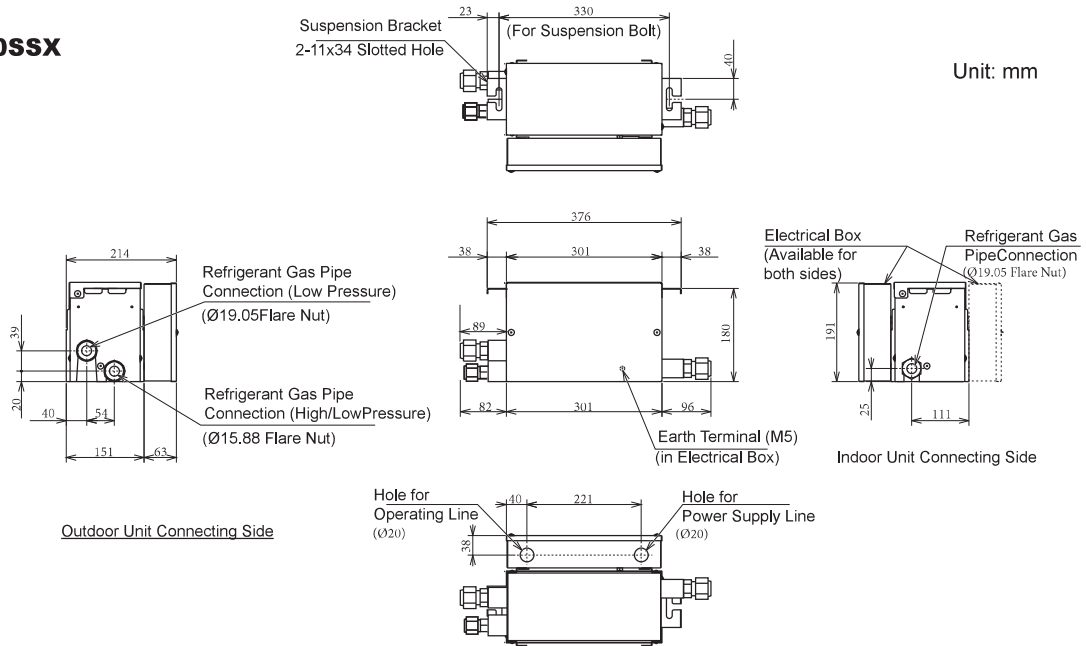

Power Supply	AC 1~ 220-240V 50Hz	Net Weight (kg)	6
Power consumption	5W	Number of connectable indoor units	1 to 8
Refrigerant	R410A	Number of Indoor unit total capacity	6.1HP to 10HP




CH-AP04MSSX

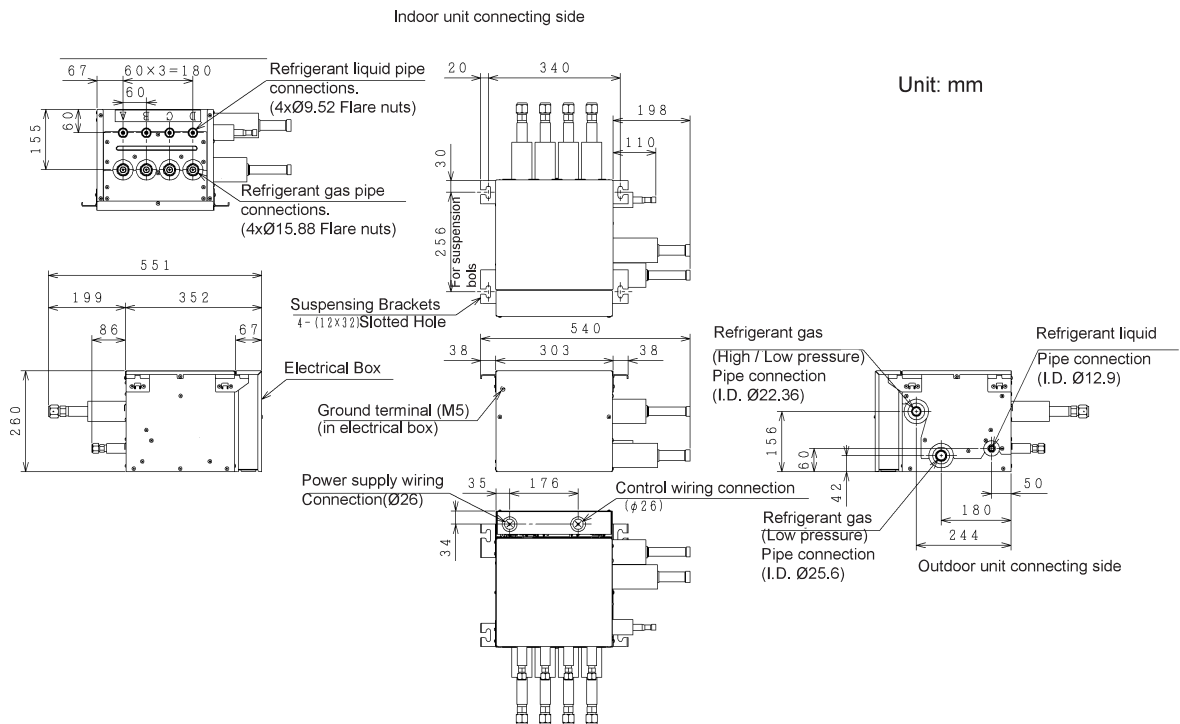


Model	CH-AP04MSSX	Net Weight (kg)	14
Power Supply	AC 1~ 220-240V 50Hz	Number of connectable indoor units per branch	1 to 6
Input (W)	11.2	Connectable indoor unit total capacity	16.0HP or less
Refrigerant	R410A	Connectable indoor unit total capacity per branch	6.0HP or less (Max. 16.0kW)

CH-AP08MSSX

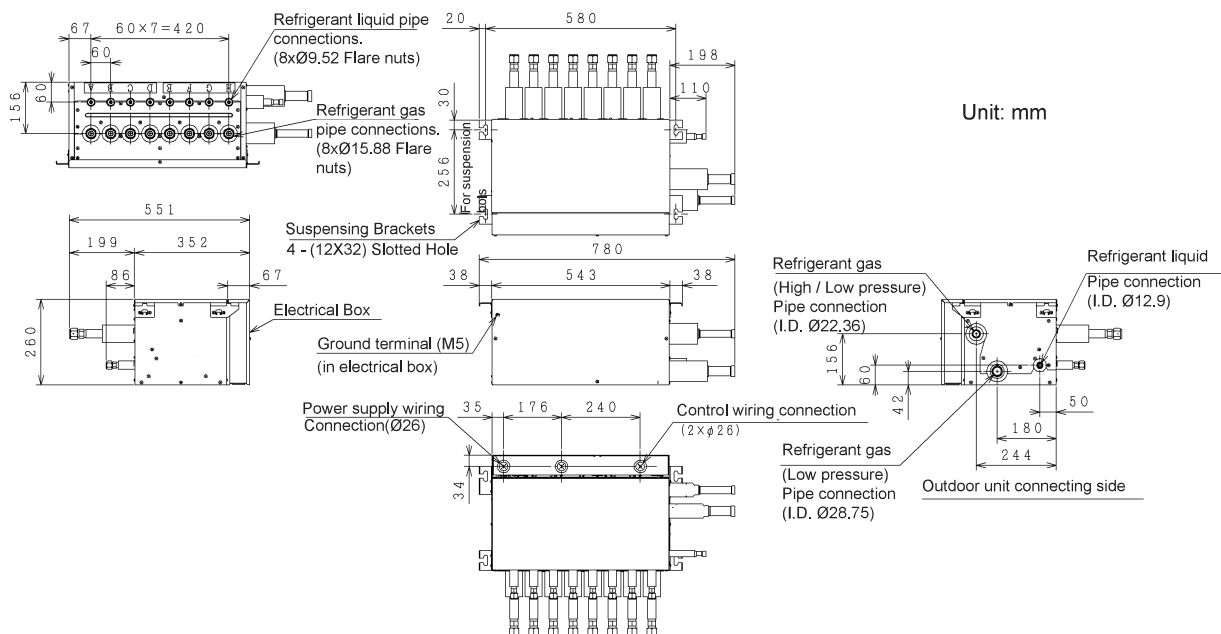


Model	CH-AP08MSSX	Net Weight (kg)	25
Power Supply	AC 1~ 220-240V 50Hz	Number of connectable indoor units per branch	1 to 6
Input (W)	22.4	Connectable indoor unit total capacity	30.0HP or less
Refrigerant	R410A	Connectable indoor unit total capacity per branch	6.0HP or less (Max. 16.0kW)

CH-AP12MSSX

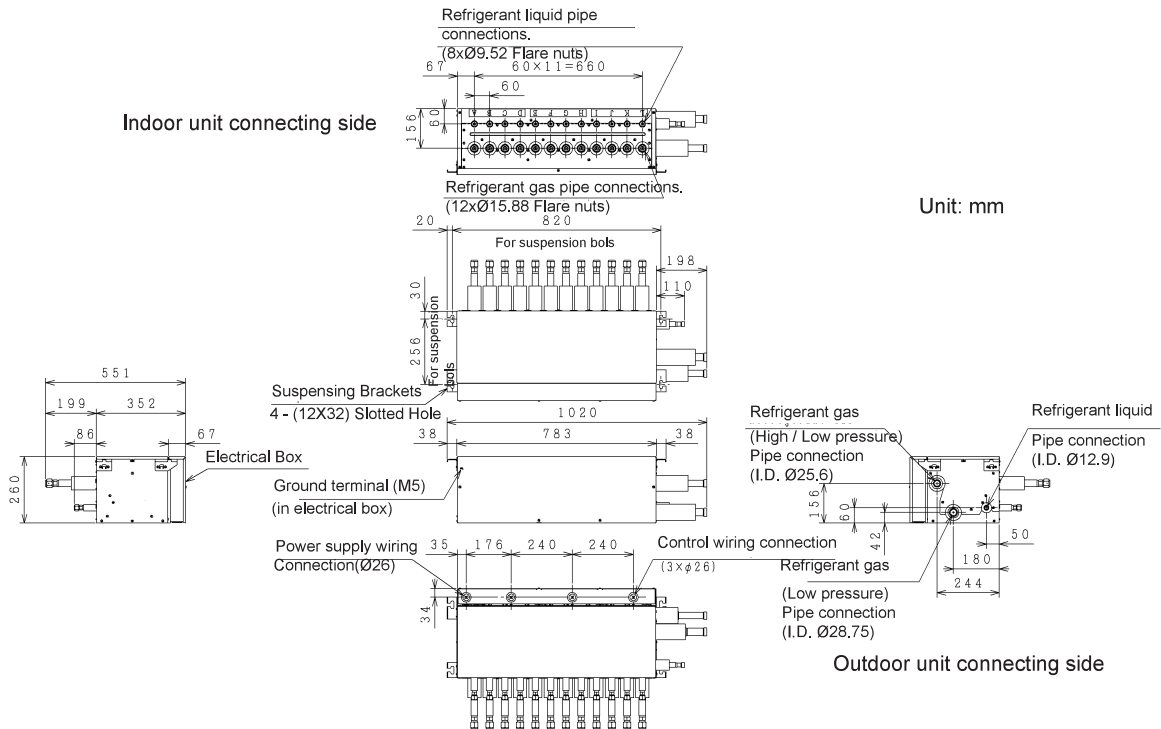

Model	CH-AP12MSSX	Net Weight (kg)	36
Power Supply	AC 1~220-240V 50Hz	Number of connectable indoor units per branch	1 to 6
Input (W)	33.6	Connectable indoor unit total capacity	30.0HP or less
Refrigerant	R410A	Connectable indoor unit total capacity per branch	6.0HP or less (Max. 16.0kW)

CH-AP16MSSX

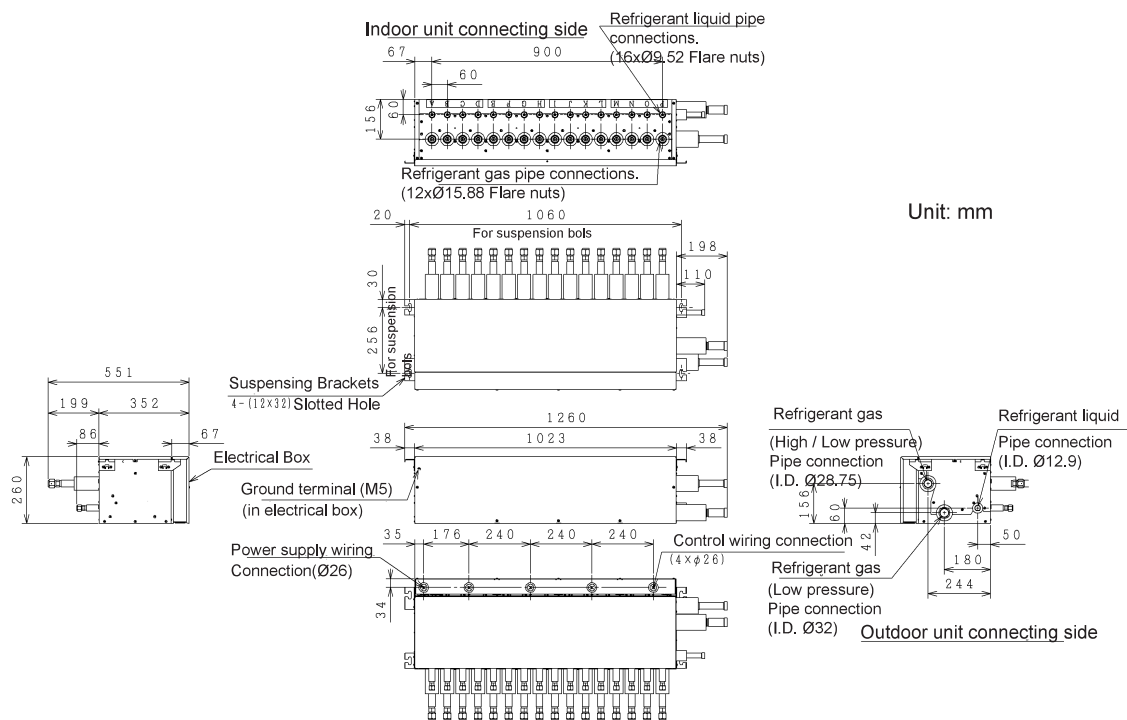

Model	CH-AP16MSSX	Net Weight (kg)	47
Power Supply	AC 1~220-240V 50Hz	Number of connectable indoor units per branch	1 to 6
Input (W)	44.8	Connectable indoor unit total capacity	30.0HP or less
Refrigerant	R410A	Connectable indoor unit total capacity per branch	6.0HP or less (Max. 16.0kW)

