

# Air Conditioning

## Product Information

PKFY-P-VLM-E / VKM-E  
Wall Mounted  
Indoor Units

Making a  
World of  
Difference

CITY MULTI



An elegant design combined with compact dimensions and quiet operation make the PKFY-P an ideal unit choice. Noise levels are significantly reduced.

### Key Features

- Compact flat panel design - only 773mm wide (P10-P32)
- Widened vane control for improved air distribution and comfort
- Reduced noise levels 22dB(A) (up to P25)



Cooling | Heating | Ventilation | Controls

# Air Conditioning

## Product Information

### PKFY-P-VLM-E / VKM-E Wall Mounted Indoor Units

Making a  
World of  
Difference




INDOOR UNITS		PKFY-P10VLM-E	PKFY-P15VLM-E	PKFY-P20VLM-E	PKFY-P25VLM-E	PKFY-P32VLM-E	PKFY-P40VLM-E	PKFY-P50VLM-E	PKFY-P63VKM-E
CAPACITY (kW)	Heating (nominal)	1.4	1.9	2.5	3.2	4.0	5.0	6.3	8.0
	Cooling (nominal)	1.2	1.7	2.2	2.8	3.6	4.5	5.6	7.1
	UK Heating	1.4	1.9	2.5	3.2	4.0	5.0	6.3	8.0
	UK Total Cooling - Hi (Sensible)	1.10 (1.00)	1.50 (1.10)	2.00 (1.40)	2.50 (1.80)	3.20 (2.50)	4.10 (3.10)	5.00 (3.60)	6.40 (5.00)
	UK Total Cooling - Mi2	-	1.50	1.98	2.47	-	-	-	-
	UK Total Cooling - Mi1	1.07	1.48	1.94	2.43	3.13	4.01	4.84	-
POWER INPUT (kW)	UK Total Cooling - Lo	1.03	1.48	1.91	2.38	3.03	3.81	4.57	6.01
	Heating (nominal)	0.01	0.01	0.01	0.02	0.03	0.03	0.04	0.04
AIRFLOW (l/s)	Cooling (nominal)	0.02	0.02	0.02	0.03	0.04	0.04	0.05	0.05
	Lo-Mi1-Mi2-Hi	55-58-63-70	67-70-73-78	67-73-82-90	67-77-90-112	72-90-115-140	105-123-143-167	113-138-170-207	267-333
SOUND PRESSURE LEVEL (dBA)	Lo-Mi1-Mi2-Hi	22-24-26-28	22-24-26-28	22-26-29-31	22-27-31-35	24-31-37-41	29-34-37-40	31-36-41-46	39-45
	Lo-Mi1-Mi2-Hi	11	11	11	11	11	13	13	21
WEIGHT (kg)	Width	773	773	773	773	773	898	898	1170
	Depth	237	237	237	237	237	237	237	295
	Height	299	299	299	299	299	299	299	365
ELECTRICAL SUPPLY	Phase	220-240v, 50Hz	220-240v, 50Hz	220-240v, 50Hz	220-240v, 50Hz	220-240v, 50Hz	220-240v, 50Hz	220-240v, 50Hz	220-240v, 50Hz
	Running Current (A)	Single	Single	Single	Single	Single	Single	Single	Single
FUSE RATING (BS88) - HRC (A)	Heating / Cooling	-	-	-	-	-	-	-	-
	Mains Cable No. Cores	6	6	6	6	6	6	6	6
Mains Cable No. Cores		3	3	3	3	3	3	3	3

Please note specification subject to change


### PRODUCT DIMENSIONS

#### PKFY-P10,15,20,25,32VLM-E

Front View

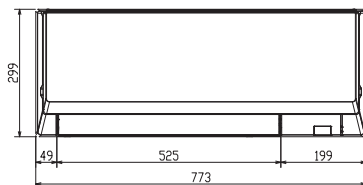


Side View




#### PKFY-P63VKM-E

Front View

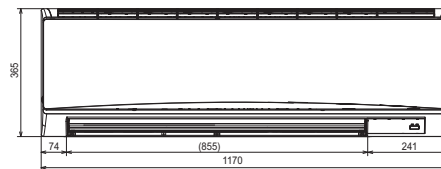


Side View




#### PKFY-P40,50VLM-E

Front View

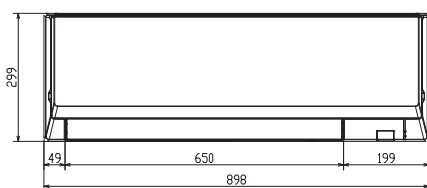

Side View



Telephone: 01707 282880

email: [air.conditioning@meuk.mee.com](mailto:air.conditioning@meuk.mee.com)

web: [airconditioning.mitsubishielectric.co.uk](http://airconditioning.mitsubishielectric.co.uk)

UNITED KINGDOM Mitsubishi Electric Europe Living Environment Systems Division  
Travellers Lane, Hatfield, Hertfordshire, AL10 8XB, England General Enquiries Telephone: 01707 282880 Fax: 01707 278881

IRELAND Mitsubishi Electric Europe Westgate Business Park, Ballymount, Dublin 24, Ireland  
Telephone: Dublin (01) 419 8800 Fax: Dublin (01) 419 8890 International code: (003531)

Country of origin: United Kingdom - Japan - Thailand - Malaysia. ©Mitsubishi Electric Europe 2019. Mitsubishi and Mitsubishi Electric are trademarks of Mitsubishi Electric Europe B.V. The company reserves the right to make any variation in technical specification to the equipment described, or to withdraw or replace products without prior notification or public announcement. Mitsubishi Electric is constantly developing and improving its products. All descriptions, illustrations, drawings and specifications in this publication present only general particulars and shall not form part of any contract. All goods are supplied subject to the Company's General Conditions of Sale, a copy of which is available on request. Third-party product and brand names may be trademarks or registered trademarks of their respective owners.

**Note:** The fuse rating is for guidance only. Please refer to the relevant databook for detailed specification. It is the responsibility of a qualified electrician/electrical engineer to select the correct cable size and fuse rating based on current regulation and site specific conditions. Mitsubishi Electric's air conditioning equipment and heat pump systems contain a fluorinated greenhouse gas, R410A (GWP:2088), R32 (GWP:675), R407C (GWP:1774) or R134a (GWP:1430). \*These GWP values are based on Regulation (EU) No 517/2014 from IPCC 4th edition. In case of Regulation (EU) No.626/2011 from IPCC 3rd edition, these are as follows: R410A (GWP:1975), R32 (GWP: 550), R407C (GWP:1650) or R134a (GWP:1300).



[www.greengateway.mitsubishielectric.co.uk](http://www.greengateway.mitsubishielectric.co.uk)

Mitsubishi Electric UK's commitment  
to the environment

Follow us @meuk\_Jes  
Follow us @green\_gateway

Mitsubishi Electric  
Living Environmental Systems UK

[mitsubishielectric2](https://www.youtube.com/channel/UCm5b1v1v1v1v1v1v1v1v1v1)

[thehub.mitsubishielectric.co.uk](http://thehub.mitsubishielectric.co.uk)

Effective as of June 2019