
Product Information

Air Conditioning

PEFY-P-VMS1-E
Ultra Thin Ceiling Concealed
Ducted Indoor Unit

Making a World of Difference

CITY MULTI

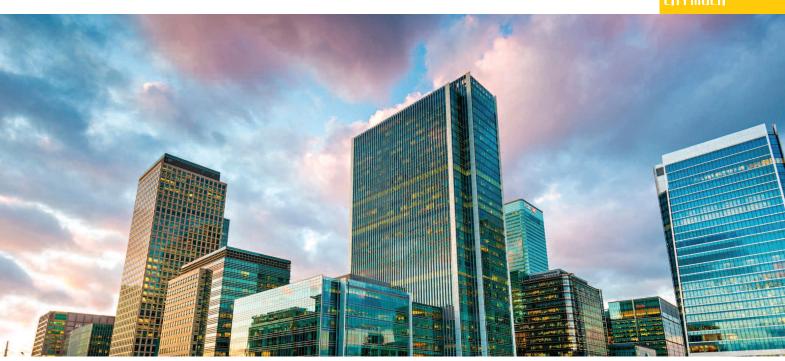

The ultra thin ceiling concealed ducted indoor unit offers increased flexibility and is particularly suitable for places where low noise operation is desired from a slimline body, such as hotels.

Key Features

- Ultra thin body height of only 200mm & width of only 790mm (size P15-32)
- Extremely quiet operation as low as 22dBA (size P15-20)
- Static pressure of 5-50Pa
- Available in a size P15, ideal for hotel rooms





Product Information

Air Conditioning

PEFY-P-VMS1-E Ultra Thin Ceiling Concealed **Ducted Indoor Unit**

Making a World of Difference




INDOOR UNITS		PEFY-P15VMS1-F	PEFY-P20VMS1-F	PEFY-P25VMS1-F	PEFY-P32VMS1-F	PEFY-P40VMS1-F	PEFY-P50VMS1-E	PEFY-P63VMS1-E
		TELLI-LIGHNOL-E	TEL I-I ZOVINOT-L	1 El 1-1 25VIVIO1-E	1 El 1-1 02 VIVIO 1-E	TEL I-I 40VIVIOT-E	TEL I-I SOVIVIOT-E	TET I-1 GOVINOT-E
CAPACITY (kW)	Heating (nominal)	1.9	2.5	3.2	4.0	5.0	6.3	8.0
	Cooling (nominal)	1.7	2.2	2.8	3.6	4.5	5.6	7.1
	UK Heating	1.9	2.5	3.2	4.0	5.0	6.3	8.0
	UK Total Cooling - Hi (Sensible)	1.50 (1.40)	2.00 (1.70)	2.50 (2.10)	3.20 (2.50)	4.10 (3.00)	5.00 (3.70)	6.40 (4.70)
	UK Total Cooling - Mi2	-	-	-	-	-	-	-
	UK Total Cooling - Mi1	1.44	1.89	2.32	2.99	3.95	4.78	6.13
	UK Total Cooling - Lo	1.34	1.76	2.07	2.63	3.70	4.51	5.77
POWER INPUT (kW)	Heating (nominal)	0.03	0.03	0.04	0.05	0.05	0.07	0.07
	Cooling (nominal)	0.05	0.05	0.06	0.07	0.07	0.09	0.09
AIRFLOW (I/s)	Lo-Mi-Hi	83-100-117	91-108-133	91-117-150	100-133-167	133-158-183	158-183-217	200-233-275
EXTERNAL STATIC PRESSURE (Pa)		5-15-35-50	5-15-35-50	5-15-35-50	5-15-35-50	5-15-35-50	5-15-35-50	5-15-35-50
SOUND PRESSURE LEVEL (dBA)*1 Lo-Mi-Hi		22-24-28	22-25-29	24-26-30	24-27-32	28-30-33	30-32-35	30-33-36
WEIGHT (kg)		19	19	19	20	24	24	28
DIMENSIONS (mm)	Width	790	790	790	790	990	990	1190
	Depth	700	700	700	700	700	700	700
	Height	200	200	200	200	200	200	200
ELECTRICAL SUPPLY		220-240v, 50Hz	220-240v, 50Hz	220-240v, 50Hz	220-240v, 50Hz	220-240v, 50Hz	220-240v, 50Hz	220-240v, 50Hz
PHASE		Single	Single	Single	Single	Single	Single	Single
RUNNING CURRENT (A) Heating / Cooling		0.31 / 0.42	0.36 / 0.47	0.39 / 0.50	0.39 / 0.50	0.45 / 0.56	0.56 / 0.67	0.61 / 0.72
FUSE RATING (BS88) - HRC (A)		6	6	6	6	6	6	6
MAINS CABLE No. Cores		3	3	3	3	3	3	3


Note: *1 Additional sound data is available for this model. Separated inlet and breakout sound power level and discharge sound power level data is available on request.

PEFY-P15/20/25/32/40/50/63VMS1-E

Upper View

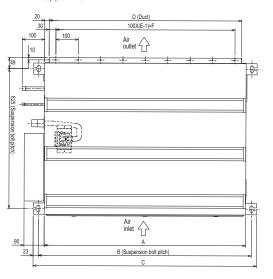

Front View

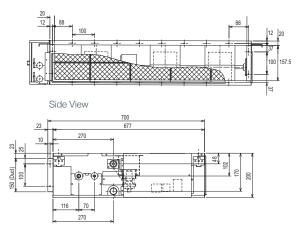

Model	Α	В	С	D	Е	F
PEFY-P15-32VMS1-E	700	752	798	660	7	600
PEFY-P40-50VMS1-E	900	952	998	860	9	800
PEFY-P63VMS1-E	1100	1152	1198	1060	11	1000



Telephone: 01707 282880 email: air.conditioning@meuk.mee.com web: airconditioning.mitsubishielectric.co.uk

UNITED KINGDOM Mitsubishi Electric Europe Living Environment Systems Division Travellers Lane, Hatfield, Hertfordshire, AL10 8XB, England General Enquiries Telephone: 01707 282880 Fax: 01707 278881

IRELAND Mitsubishi Electric Europe Westgate Business Park, Ballymount, Dublin 24, Ireland Telephone: Dublin (01) 419 8800 Fax: Dublin (01) 419 8890 International code: (003531)

The fuse rating is for guidance only. Please refer to the relevant databook for detailed specification. It is the responsibility of a qualified electrician/electrical engineer to select the correct cable size and fuse rating based on current regulation specific conditions. Missubshi Electric's air conditioning equipment and heat pump systems contain a fluorinated greenhouse gas, R410A (GWP-2088), R52 (GWP-676), R407C (GWP-1774) or R1-134 (GWP-1403). These GWP retained in Call Post Card Edition, these as follows. R410A (GWP-1976) R52 (GWP-19











Mitsubishi Electric UK's commitment to the environment











mitsubishielectric2



thehub.mitsubishielectric.co.uk