



**P1 Type floor-standing • R410A**

The compact Floor-standing P1 units are the ideal solution for providing perimeter air conditioning.



COMPATIBLE WITH ALL PANASONIC CONNECTIVITY SOLUTIONS. FOR DETAILED INFORMATION GO TO THE CONTROL SYSTEMS SECTION

Model			S-22MP1E5	S-28MP1E5	S-36MP1E5	S-45MP1E5	S-56MP1E5	S-71MP1E5
Cooling capacity	kW		2,2	2,8	3,6	4,5	5,6	7,1
Input power cooling	W		56,00	56,00	85,00	126,00	126,00	160,00
Operating current cooling	A		0,25	0,25	0,38	0,56	0,56	0,72
Heating capacity	kW		2,5	3,2	4,2	5,0	6,3	8,0
Input power heating	W		40,00	40,00	70,00	91,00	91,00	120,00
Operating current heating	A		0,18	0,18	0,31	0,41	0,41	0,54
Fan type			Sirocco fan	Sirocco fan	Sirocco fan	Sirocco fan	Sirocco fan	Sirocco fan
Air volume	Hi / Med / Lo	m <sup>3</sup> /min	7,00/6,00/5,00	7,00/6,00/5,00	9,00/7,00/6,00	12,00/9,00/8,00	15,00/13,00/11,00	17,00/14,00/12,00
External static pressure		Pa	15	15	15	15	15	15
Sound pressure	Hi / Med / Lo	dB(A)	33/30/28	33/30/28	39/35/29	38/35/31	39/36/31	41/38/35
Dimensions	HxWxD	mm	615 x 1065 x 230	615 x 1065 x 230	615 x 1065 x 230	615 x 1380 x 230	615 x 1380 x 230	615 x 1380 x 230
Net weight		kg	29	29	29	39	39	39
Piping connections	Liquid pipe	Inch (mm)	1/4(6,35)	1/4(6,35)	1/4(6,35)	1/4(6,35)	1/4(6,35)	3/8(9,52)
	Gas pipe	Inch (mm)	1/2(12,70)	1/2(12,70)	1/2(12,70)	1/2(12,70)	1/2(12,70)	5/8(15,88)

Accessories	
<b>CZ-RTC6</b>	CONEX wired remote controller (non-wireless)
<b>CZ-RTC6BL</b>	CONEX wired remote controller with Bluetooth®
<b>CZ-RTC5B</b>	Wired remote controller with Econavi function


Accessories	
<b>CZ-RWS3 + CZ-RWRC3</b>	Infrared remote controller
<b>PAW-RE2C4</b>	Wired remote controller for hotel application

**Technical focus**

- Pipes can be connected to either side of the unit from the bottom or rear
- Easy to install

- Front panel opens fully for easy maintenance
- Removable air discharge grille gives flexible airflow
- Room for condensate pump

**Effective perimeter handling**

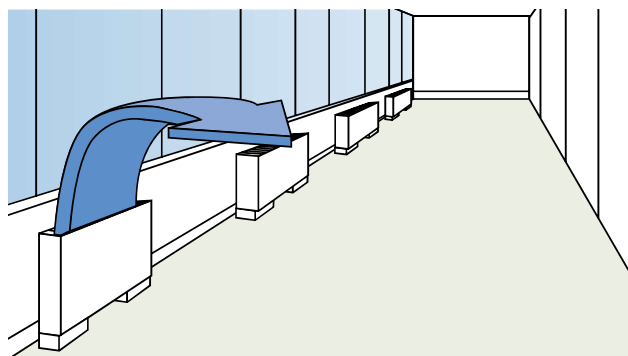

**Effective perimeter handling**



INTERNET CONTROL: Optional.

Rating Conditions: Cooling Indoor 27 °C DB / 19 °C WB, Cooling Outdoor 35 °C DB / 24 °C WB, Heating Indoor 20 °C DB, Heating Outdoor 7 °C DB / 6 °C WB, (DB: Dry Bulb; WB: Wet Bulb). Specifications subject to change without notice. For detailed information about ErP / Energy Labeling, please visit our websites [www.aircon.panasonic.eu](http://www.aircon.panasonic.eu) or [www.ptc.panasonic.eu](http://www.ptc.panasonic.eu).