1-4. Dimensional Data

(A) Indoor Units: High Static Pressure Ducted Type

S-200PE3E5B / S-250PE3E5B

Required Minimum Space for Installation and Service

(1) Dimensions of suspension bolt pitch and unit

Unit: mm

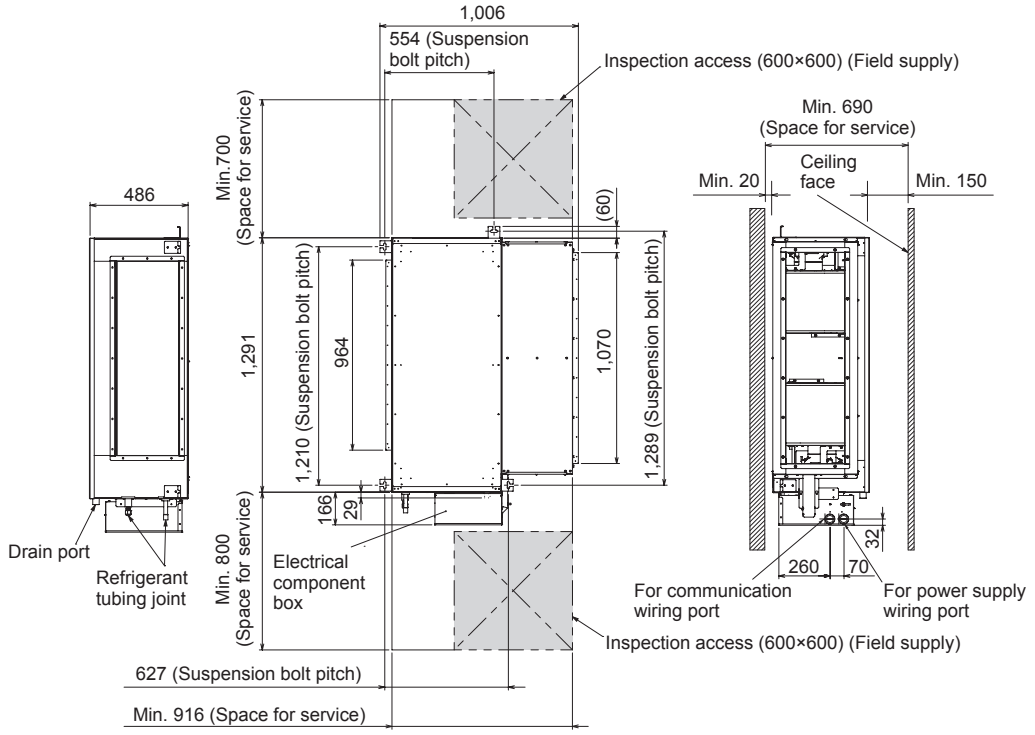

(2) Dimensions of indoor unit

Unit: mm

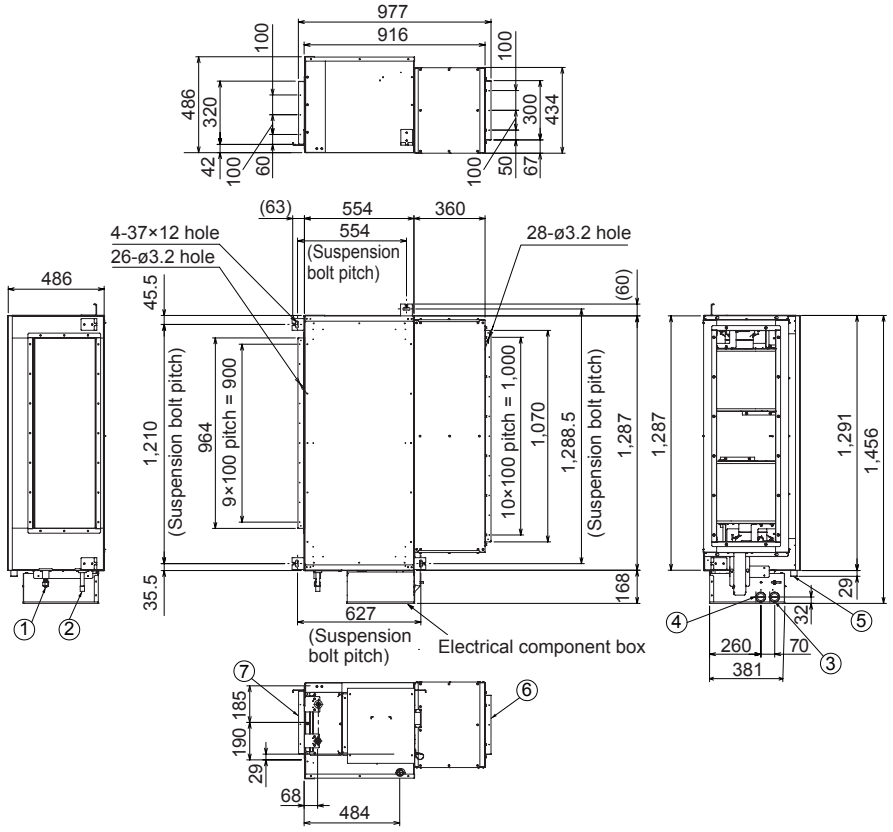

①	Refrigerant liquid tubing (Flare) ø12.7 (Type 200 : Connection Tubing ø12.7 → ø9.52)
②	Refrigerant gas tubing (Brazing) ø19.05 (Connection Tubing ø19.05 → ø25.4)
③	Power supply port
④	Communication port
⑤	Drain port VP25
⑥	Air intake duct connecting side flange
⑦	Air discharge duct connecting side flange