

Air Conditioning

Product Information

MSZ-EF R32 Zen Wall Mounted System
Inverter Heat Pump

Making a
World of
Difference

M series



The **Zen Series** is a wall mounted system that blends energy efficiency with a sophisticated, streamlined design. Combining an impressively low power consumption with a quiet, yet powerful performance, units have a distinctively styled front panel that not only looks appealing, but also helps to make cleaning of the unit easier.

Designed to complement modern interior décor and suitable for a wide range of applications, Zen units blend in naturally wherever they are installed and are available in three striking colours; black, silver and white. To aid control and energy saving, the universal controller has an in built 7 day timeclock.

Key Features

- Stylish design in a range of three distinct colours
- Energy efficient operation with a powerful performance
- Recognised by the Noise Abatement Society and awarded the Quiet Mark for industry leading low noise levels



Air Conditioning

Product Information

MSZ-EF R32 Zen Wall Mounted System Inverter Heat Pump

Making a
World of
Difference



MSZ-EF B/S/W - INDOOR UNITS		MSZ-EF25VG B/S/W	MSZ-EF35VG B/S/W	MSZ-EF50VG B/S/W
CAPACITY (kW)	Heating (nominal)	3.2 (1.0-4.2)	4.0 (1.3-5.1)	5.8 (1.4-7.5)
	Cooling (nominal)	2.5 (0.9-3.4)	3.5 (1.1-4.0)	5.0 (1.4-5.4)
	Heating (UK)	2.65 (0.91-3.49)	3.32 (1.08-4.23)	4.82 (1.16-6.23)
	Cooling (UK)	2.48 (0.89-3.37)	3.47 (1.09-3.96)	4.96 (1.39-5.36)
SHF (nominal)		0.97	0.80	0.70
COP / EER (nominal)		4.57 / 4.63	4.21 / 3.85	3.72 / 3.25
SCOP / SEER (BS EN14825)		4.7 / 9.1	4.6 / 8.8	4.5 / 7.5
ErP ENERGY EFFICIENCY CLASS	Heating/Cooling	A++ / A+++	A++ / A+++	A+ / A++
AIRFLOW (l/s)	Heating/Cooling - SLo-Lo-Mi-Hi-Shi	67-77-103-148-198 / 67-77-105-138-175	67-77-103-148-212 / 67-77-105-138-175	107-120-150-185-243 / 97-113-132-153-188
PIPE SIZE mm (in)	Gas	9.52 (3/8")	9.52 (3/8")	9.52 (3/8")
	Liquid	6.35 (1/4")	6.35 (1/4")	6.35 (1/4")
SOUND PRESSURE LEVEL (dBA)	Heating/Cooling - SLo-Lo-Mi-Hi-Shi	21-24-29-37-45 / 19-23-29-36-42	21-24-30-38-46 / 21-24-30-36-42	30-33-37-43-49 / 30-33-36-40-43
SOUND POWER LEVEL (dBA)		60	60	60
DIMENSIONS (mm)	Width x Depth x Height	885 x 195 x 299	885 x 195 x 299	885 x 195 x 299
WEIGHT (kg)		11.5	11.5	11.5
ELECTRICAL SUPPLY		Fed by Outdoor Unit	Fed by Outdoor Unit	Fed by Outdoor Unit
FUSE RATING (BS88) - HRC (A)		6	6	6
INTERCONNECTING CABLE No. CORES		4	4	4


MUZ-EF - OUTDOOR UNITS		MUZ-EF25VG	MUZ-EF35VG	MUZ-EF50VG
SOUND PRESSURE LEVEL (dBA)	Heating/Cooling	48 / 47	50 / 49	52 / 52
SOUND POWER LEVEL (dBA)	Cooling	58	62	65
WEIGHT (kg)		31	34	40
DIMENSIONS (mm)	Width x Depth x Height	800 x 285 x 550	800 x 285 x 550	800 x 285 x 714
ELECTRICAL SUPPLY		220-240v, 50Hz	220-240v, 50Hz	220-240v, 50Hz
PHASE		Single	Single	Single
SYSTEM POWER INPUT (kW)	Heating/Cooling (nominal)	0.70 / 0.54	0.95 / 0.91	1.56 / 1.54
	Heating/Cooling (UK)	0.64 / 0.44	0.87 / 0.73	1.42 / 1.24
STARTING CURRENT (A)		3.6	4.4	7.1
SYSTEM RUNNING CURRENT (A)	Heating/Cooling [MAX]	3.6 / 3.0 [6.8]	4.4 / 4.2 [6.8]	7.1 / 6.9 [13.6]
FUSE RATING (BS88) - HRC (A)		10	10	16
MAINS CABLE No. CORES		3	3	3
MAX PIPE LENGTH (m)		20	20	30
MAX HEIGHT DIFFERENCE (m)		12	12	15
CHARGE REFRIGERANT (kg) / CO ₂ EQUIVALENT (t) - R32 (GWP 675) - 7m		0.62 / 0.42	0.74 / 0.50	1.05 / 0.71
MAX ADDITIONAL REFRIGERANT (kg) / CO ₂ EQUIVALENT (t) - R32 (GWP 675)		0.26 / 0.18	0.26 / 0.18	0.46 / 0.31

Notes: Black (B), Silver (S), White (W)


PRODUCT DIMENSIONS

MSZ-EF25/35/50VG B/S/W


Front View

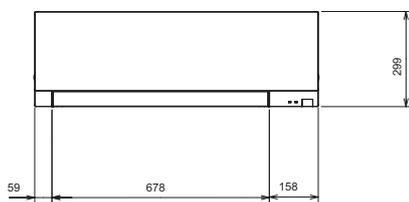

Upper View



Side View



Telephone: 01707 282880

email: air.conditioning@meuk.mee.com

web: airconditioning.mitsubishielectric.co.uk

UNITED KINGDOM Mitsubishi Electric Europe Living Environment Systems Division

Travellers Lane, Hatfield, Hertfordshire, AL10 8XB, England General Enquiries Telephone: 01707 282880 Fax: 01707 278881

IRELAND Mitsubishi Electric Europe Westgate Business Park, Ballymount, Dublin 24, Ireland

Telephone: Dublin (01) 419 8800 Fax: Dublin (01) 419 8890 International code: (003531)

Country of origin: United Kingdom - Japan - Thailand - Malaysia. ©Mitsubishi Electric Europe 2019. Mitsubishi and Mitsubishi Electric are trademarks of Mitsubishi Electric Europe B.V. The company reserves the right to make any variation in technical specification to the equipment described, or to withdraw or replace products without prior notification or public announcement. Mitsubishi Electric is constantly developing and improving its products. All descriptions, illustrations, drawings and specifications in this publication present only general particulars and shall not form part of any contract. All goods are supplied subject to the Company's General Conditions of Sale, a copy of which is available on request. Third-party product and brand names may be trademarks or registered trademarks of their respective owners.

Note: The fuse rating is for guidance only. Please refer to the relevant databook for detailed specification. It is the responsibility of a qualified electrician/electrical engineer to select the correct cable size and fuse rating based on current regulation and site specific conditions. Mitsubishi Electric's air conditioning equipment and heat pump systems contain a fluorinated greenhouse gas, R410A (GWP:2088), R32 (GWP:675), R407C (GWP:1774) or R134a (GWP:1430). *These GWP values are based on Regulation (EU) No 517/2014 from IPCC 4th edition. In case of Regulation (EU) No.626/2011 from IPCC 3rd edition, these are as follows: R410A (GWP:1975), R32 (GWP: 550), R407C (GWP:1650) or R134a (GWP:1300).



www.greengateway.mitsubishielectric.co.uk

Mitsubishi Electric UK's commitment to the environment

Follow us @meuk_Jes
Follow us @green_gateway

Mitsubishi Electric
Living Environmental Systems UK

[mitsubishielectric2](https://www.youtube.com/channel/UCm9t8v8v8v8v8v8v8v8v8v8)

thehub.mitsubishielectric.co.uk

Effective as of March 2019