



Piping and wiring connections can be made from 4 directions: Front, Right, Rear and Below.



Please secure the unit firmly with 4 foundation (M10) bolts. (Bolts and washers must be purchased locally.)




Dimensions of space needed for service access are shown in the below diagram.



The diagram below shows a basic example. Explanation of particular details are given in the installation manuals etc.



①...Refrigerant GAS pipe connection (FLARE)φ5.88(5/8F)
②...Refrigerant LIQUID pipe connection (FLARE)φ9.52(3/8F)
※1...Indication of STOP VALVE connection location.

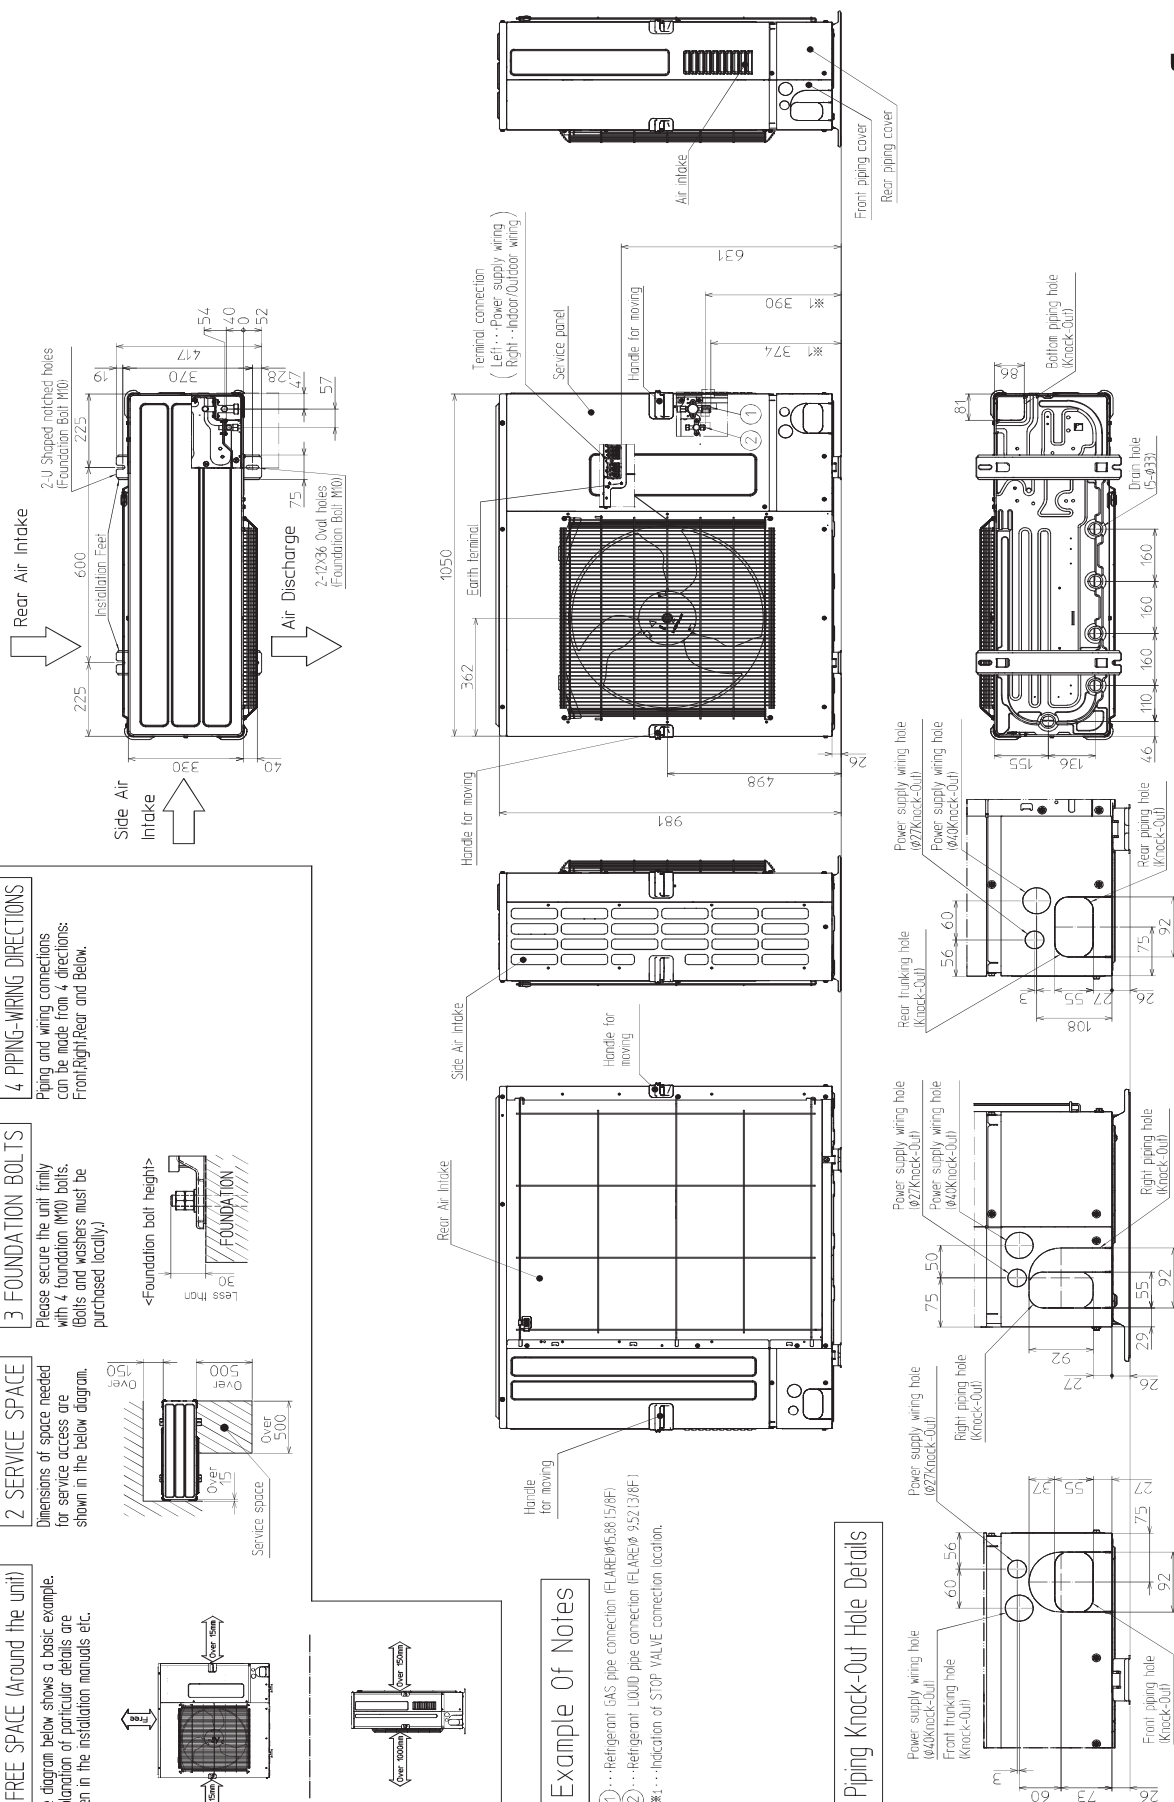

Unit: mm