

Aquarea Air Smart fan coil ducted multi zone thin / ducted multi zone

Fan coil ducted units with cooling and heating.

Cooling capacity: 0,5 to 7,6 kW.

Heating capacity: 0,5 to 8,52 kW.



Optional controller.
Wall-mounted control
with Modbus.
PCZ-EEB749



Optional controller.
Wall-mounted control
with integrated Wi-Fi.
PCZ-EFB749



Optional controller.
PCB for analog control
(0-10 V).

+ CHECK PAGE 132 FOR A WIDER SELECTION OF ACCESSORIES

The range at a glance

- Multi zone management (2-5 zones)
- Slim profile, only 185 mm for the thin version
- DC Inverter – maximising comfort and energy savings
- Modulated air flow
- Quiet operation
- Centrifugal fan with single motor impeller

Possible configurations

- Left or right water connections
- 2 or 3 way valves as accessories
- Wall-mounted control or PCB for analog input (0-10 V)

The ducted Smart fan coil unit with integrated multi zone management.

High installation flexibility.

Single air outlet per zone.



Example:
3 air outlets for 3 independent zones.

Multiple air outlets per zone.



Example:
3 air outlets for 2 independent zones.
Zone 1 with dual channel.
Zone 2 with single channel.

Multi zone management

Thanks to integrated multi zone management and the use of forward-bladed centrifugal brushless EC multi-fans, the fan coil ducted multi zone allow independent management of the different thermal zones, resulting in benefits in terms of efficiency, comfort and quietness.



1 | Air supply plate.

Built-in air supply plate, number of outlets depending on unit size.


- P-FTQ30/P-FSQ30: 2 outlets DN 160 mm
- P-FTQ45/P-FSQ45: 3 outlets DN 160 mm
- P-FTQ60/P-FSQ60: 4 outlets DN 160 mm
- P-FTQ65/P-FSQ75: 5 outlets DN 160 mm

2 | Fans.

Integrated multi-fans for independent management of the different zones.

3 | Horizontal condensate tray.

Allows the collection of condensate if the unit is installed horizontally.

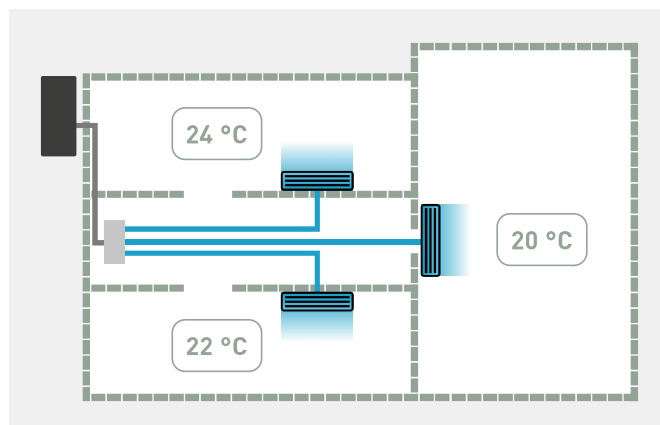

Technical features

		Ducted multi zone thin				Ducted multi zone			
Model		P-FTQ30	P-FTQ45	P-FTQ60	P-FTQ65	P-FSQ30	P-FSQ45	P-FSQ60	P-FSQ75
(the complete model codes are shown in the table below)									
Fan speed ¹⁾		Min / Med / Max	Min / Med / Max	Min / Med / Max	Min / Med / Max	Min / Med / Max	Min / Med / Max	Min / Med / Max	Min / Med / Max
Total cooling capacity ²⁾	kW	1,10/1,97 /3,02	1,16/2,97 /4,40	2,02/3,68 /5,70	2,09/4,15 /6,40	0,47/3,80 /3,23	0,66/3,77 /4,57	0,85/4,87 /5,88	1,06/6,31 /7,61
Sensible capacity ²⁾	kW	0,76 /1,37 /2,15	0,79/2,09 /3,16	1,45/2,67 /4,10	1,61/3,08 /4,60	0,33/2,70 /2,22	0,48/2,62 /3,16	0,63/3,40 /4,10	0,78/4,32 /5,20
Single zone cooling capacity ²⁾	kW	0,49/1,30 /1,70	0,49/1,30 /1,70	0,49/1,30 /1,70	0,49/1,30 /1,70	— /— /2,10	— /— /2,10	— /— /2,10	— /— /2,10
Single zone sensible capacity ²⁾	kW	0,31/0,89 /1,23	0,31/0,89 /1,23	0,31/0,89 /1,23	0,31/0,89 /1,23	— /— /1,50	— /— /1,50	— /— /1,50	— /— /1,50
Water flow ²⁾	l/h	190/338 /530	200/510 /800	346/630 /1030	358/713 /1220	80/651 /553	113/647 /782	146/834 /1008	182,3/1081 /1304
Water pressure drop ^{2) 3)}	kPa	4,0/11,0/22,0	2,0/9,0/18,0	3,0/9,0/18,0	1,0/4,0/9,0	1,8/29,0/54,1	1,2/25,7/36,4	1,0/20,2/28,5	1,6/37,3/52,6
Heating capacity ⁴⁾	kW	1,15/2,11 /3,30	1,71/3,19 /4,90	-/5,76/6,30	2,67/4,75 /7,65	0,45/3,90 /3,61	0,68/4,16 /5,08	0,90/5,42 /6,59	1,13/6,87 /8,37
Single zone heating capacity ⁴⁾	kW	0,42/1,29 /1,85	0,42/1,29 /1,85	0,42/1,29 /1,85	0,42/1,29 /1,85	— /— /2,20	— /— /2,20	— /— /2,20	— /— /2,20
Water flow ⁴⁾	l/h	200/368 /560	296/554 /800	391/699 /1110	464/826 /1305	80/688 /636	120/748 /914	159/975 /1189	199/1230 /1502
Water pressure drop ^{3) 4)}	kPa	4,0/13,0/25,0	3,0/10,0/19,0	3,0/10,0/18,0	2,0/5,0/10,0	1,4/29,0/61,2	1,1/28,9/42,3	0,9/23,1/33,7	1,5/41,4/60,6
Sound levels									
Sound power	dB(A)	40/49/58	42/50/59	42/52/61	43/53/62	— /— /60	— /— /61	— /— /62	— /— /64
Ventilation									
Number of fans		2	3	4	5	2	3	4	5
Air flow	m³/h	145/290 /480	215/435 /720	288/576 /960	360/720 /1200	60/600 /810	90/900 /1215	120/1200 /1620	150/1500 /2025
Single zone air flow	m³/h	50/160/240	50/160/240	50/160/240	50/160/240	60/205/300	60/205/300	60/205/300	60/205/300
Maximum static pressure	Pa	100	100	100	100	100	100	100	100
Electrical data									
Power supply	Voltage	V	230	230	230	230	230	230	230
	Phase		Single phase	Single phase	Single phase	Single phase	Single phase	Single phase	Single phase
	Frequency	Hz	50	50	50	50	50	50	50
Consumption	W	31/66/130	45/102/195	61/135/260	76/162/325	53/140/178	159/420/534	212/560/712	265/700/890
Degree of protection	IP	X0	X0	X0	X0	X0	X0	X0	X0
Connections									
Hydraulic connections type		Eurokonus	Eurokonus	Eurokonus	Eurokonus	Eurokonus	Eurokonus	Eurokonus	Eurokonus
Hydraulic connections	Inch	¾	¾	¾	¾	¾	¾	¾	¾
Condensate drainage connection	mm	20	20	20	20	20	20	20	20
Intake air connection (base x height)	mm	160	160	160	160	160	160	160	160
Return air connection (base x height)	mm	630 x 100	830 x 100	1030 x 100	1320 x 100	630 x 150	830 x 150	1030 x 150	1320 x 150
Dimension and weight									
Dimension	H x W x D	mm	185 x 790 x 575	185 x 990 x 575	185 x 1190 x 575	185 x 1440 x 575	240 x 790 x 695	240 x 990 x 695	240 x 1190 x 695
Weight	kg		41	45	54	56	43	47	56

1) Fan standard factory set speeds, 2) According to Eurovent standard, Air: 27 °C DB/19 °C WB, chilled water: 7 °C/12 °C, 3) Pressure loss by corresponding nominal flow, 4) According to Eurovent standard, Air: 20 °C, hot water: 45 °C/40 °C.

Configure your own Aquarea Air Smart fan coil ducted multi zone thin / ducted multi zone unit

Fan coil with wall-mounted control		
Left-hand piping	Right-hand piping	
P-FTQ30005-RE	P-FTQ30R05-RE	
P-FTQ45005-RE	P-FTQ45R05-RE	
P-FTQ60005-RE	P-FTQ60R05-RE	
P-FTQ65005-RE	P-FTQ65R05-RE	
P-FSQ30005-RE	P-FSQ30R05-RE	
P-FSQ45005-RE	P-FSQ45R05-RE	
P-FSQ60005-RE	P-FSQ60R05-RE	
P-FSQ75005-RE	P-FSQ75R05-RE	
Control (required, to be ordered separately)	With Modbus	PCZ-EEB749
	With integrated Wi-Fi	PCZ-EFB749

Fan coil with PCB for analog control (0-10 V)		
Left-hand piping	Right-hand piping	
P-FTQ30005-JE	P-FTQ30R05-JE	
P-FTQ45005-JE	P-FTQ45R05-JE	
P-FTQ60005-JE	P-FTQ60R05-JE	
P-FTQ65005-JE	P-FTQ65R05-JE	
P-FSQ30005-JE	P-FSQ30R05-JE	
P-FSQ45005-JE	P-FSQ45R05-JE	
P-FSQ60005-JE	P-FSQ60R05-JE	
P-FSQ75005-JE	P-FSQ75R05-JE	

Valve kits (optional)	
PCZ-V30361	3 way valve with motor
PCZ-V20139	2 way valve with motor