

REMOTE CONTROLLER WITH ECONAVI AND DATANAVI



Easy to use, attractive, clear design, with new demand control functions and energy consumption display! This useful feature makes this remote controller unique!


Key Functions

- Easy setup of the timer and settings of the indoor unit
- Energy consumption display (only available with PACi units with the reference ending with A)
- Limitation of the energy consumption (Demand control) by timer.

Backup control by using CZ-RTC5B

Group wiring of 2 systems of PACi can do auto individual control.

- Rotation operation
- Backup operation
- Support operation

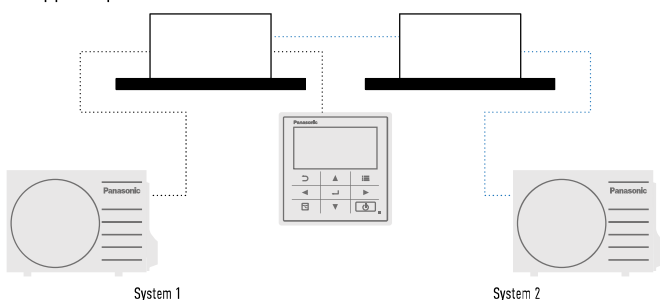

Basic function (Operation display & indication)

All functions are easily available on the remote controller.

1. Name of the room (Max.16 characters)
2. Time & Day of the week
3. Mode: Hot / Cool / Dry / Fan Auto
4. Status: Heating stand-by / Defrost operation / Stand-by (ECO G system)
5. Set temperature
6. Flap setting
7. Fan speed: H / M / L / Auto

Functions available on the CZ-RTC5B

Control item	Controllability	Indoor Units	
		PACi Standard	PACi Elite
Basic Operation	Operation, Mode, Temperature setting, Airflow volume, Airflow direction	✓	✓
	Time display	✓	✓
Timer function	Easy ON/OFF timer	✓	✓
	Weekly Program timer	✓	✓
	Outing function	✓	✓
	Temperature auto return	✓	✓
Energy saving	Temperature setting range limitation	✓	✓
	OFF remind	✓	✓
	Energy saving mode	✓	✓
	Schedule demand control	—	✓
Maintenance	Energy monitoring - R32	✓	✓
	System failure information	✓	✓
	Service contact registration	✓	✓
	Filter sign (rest time display) & Reset	✓	✓
	Auto-address, Test run	✓	✓
	Sensor value monitor	✓	✓
	Simple / Detail setting mode	✓	✓
	Key lock	✓	✓
Others	Ventilation fan control	✓	✓
	Display contrast adjustment	✓	✓
	Remote controller sensor	✓	✓
	Quiet operation mode	—	✓
	Prohibit setting control from Central controller	✓	✓

All specifications subject to change without notice.