

# PCA-M R32

## Ceiling Suspended System

Standard Inverter Heat Pump (Single Phase)

Mr. SLIM™

The **PCA-M Standard Inverter** range is a ceiling suspended system that blends a host of outstanding features with a sophisticated streamlined design. Offering advanced control options and quiet operation, this range provides extreme flexibility and ease of installation whilst being cost effective.

**R32**

### Key Features & Benefits:

- Flush to wall installation for concealment of service connections
- High / Low ceiling height modes
- Improved airflow control, including automatic air speed adjustment for greater comfort
- Replace Technology available
- Single fan chassis across entire outdoor unit range





PCA-M INDOOR UNITS		PCA-M50KA	PCA-M60KA	PCA-M71KA	PCA-M100KA	PCA-M125KA	PCA-M140KA
CAPACITY (kW)	Heating (nominal)	6.0 (1.5-7.2)	7.0 (1.6-8.0)	8.0 (2.0-10.2)	11.2 (2.8-12.5)	13.5 (4.1-15.0)	15.0 (4.2-15.8)
	Cooling (nominal)	5.0 (1.5-5.6)	6.1 (1.6-6.3)	7.1 (2.2-8.1)	9.5 (4.0-10.6)	12.1 (5.7-13.0)	13.4 (5.7-14.1)
	Heating (UK)	5.10 (1.28-6.12)	5.95 (1.36-6.80)	6.80 (1.70-8.67)	9.63 (2.41-10.75)	11.61 (3.53-12.90)	12.90 (3.61-13.59)
	Cooling (UK)	4.60 (1.38-5.15)	5.61 (1.47-5.80)	6.53 (1.56-7.45)	8.65 (3.64-9.65)	11.01 (5.19-11.83)	12.19 (5.19-12.83)
SHF (nominal)		0.79	0.81	0.76	0.77	0.72	0.72
COP / EER (nominal)		3.71 / 3.30	4.00 / 3.70	3.61 / 3.60	3.41 / 3.23	3.41 / 3.01	3.50 / 2.50
SCOP (ηsh) / SEER (ηsc) (BS EN14825)		4.10 / 6.00	4.10 / 6.40	4.10 / 6.50	4.10 / 6.00	4.1 (162.7%) / 5.2 (213%)	4.0 (158.7%) / 5.1 (208%)
ErP ENERGY EFFICIENCY CLASS	Heating/Cooling	A+ / A+	A+ / A++	A+ / A++	A+ / A+	A+ / A	A+ / A
AIRFLOW (l/s)	Lo-M11-M12-Hi	167-183-217-250	250-267-283-317	267-283-300-333	367-400-433-467	383-417-450-483	400-433-483-533
PIPE SIZE mm (in)	Gas/ Liquid	12.7 (1/2") / 6.35 (1/4")	15.88 (5/8") / 6.35 (1/4")	15.88 (5/8") / 9.52 (3/8")	15.88 (5/8") / 9.52 (3/8")	15.88 (5/8") / 9.52 (3/8")	15.88 (5/8") / 9.52 (3/8")
SOUND PRESSURE LEVEL (dBA)	Lo-M11-M12-Hi	32-34-37-40	33-35-37-40	35-37-39-41	37-39-41-43	39-41-43-45	41-43-45-48
SOUND POWER LEVEL (dBA)		60	60	62	63	65	68
DIMENSIONS (mm)	Width x Depth x Height	960 x 680 x 230	1280 x 680 x 230	1280 x 680 x 230	1600 x 680 x 230	1600 x 680 x 230	1600 x 680 x 230
WEIGHT (kg)		26	32	32	37	38	40
ELECTRICAL SUPPLY		Fed by Outdoor Unit	Fed by Outdoor Unit	Fed by Outdoor Unit	Fed by Outdoor Unit	Fed by Outdoor Unit	Fed by Outdoor Unit
FUSE RATING (BS88) - HRC (A)		6	6	6	6	6	6
INTERCONNECTING CABLE No. CORES		4	4	4	4	4	4
WIRED REMOTE CONTROLLER REFERENCE		PAR-40MAA	PAR-40MAA	PAR-40MAA	PAR-40MAA	PAR-40MAA	PAR-40MAA
WIRELESS REMOTE CONTROLLER REFERENCE		PAR-SL94B	PAR-SL94B	PAR-SL94B	PAR-SL94B	PAR-SL94B	PAR-SL94B

SUZ-M / PUZ-M OUTDOOR UNITS		SUZ-M50VAR2	SUZ-M60VAR2	SUZ-M71VAR1	PUZ-M100VAR1	PUZ-M125VAR1	PUZ-M140VAR1
SOUND PRESSURE LEVEL (dBA)	Heating/Cooling	48 / 49	49 / 51	49 / 51	51 / 54	54 / 56	55 / 57
SOUND POWER LEVEL (dBA)	Cooling	64	65	66	70	72	73
WEIGHT (kg)		41	54	55	76	84	84
DIMENSIONS (mm)	Width x Depth x Height	800 x 285 x 714	840 x 330 x 880	840 x 330 x 880	1050 x 330 x 981	1050 x 330 x 981	1050 x 330 x 981
ELECTRICAL SUPPLY		220-240v, 50Hz	220-240v, 50Hz	220-240v, 50Hz	220-240v, 50Hz	220-240v, 50Hz	220-240v, 50Hz
PHASE		Single	Single	Single	Single	Single	Single
SYSTEM POWER INPUT (kW)	Heating/Cooling (nominal)	1.61 / 1.51	1.75 / 1.64	2.21 / 1.97	3.28 / 2.94	3.95 / 4.01	4.28 / 5.36
	Heating/Cooling (UK)	1.37 / 1.30	1.49 / 1.41	1.88 / 1.69	2.95 / 2.44	3.56 / 3.33	3.85 / 4.45
STARTING CURRENT (A)		8.0	9.3	9.5	14.2	17.3	23.2
SYSTEM RUNNING CURRENT (A)	Heating/Cooling [MAX]	8.0 / 7.1 [13.5]	9.3 / 8.4 [14.8]	9.5 / 9.1 [14.8]	14.2 / 12.6 [20.0]	17.0 / 17.3 [26.5]	18.4 / 23.2 [30.0]
FUSE RATING (BS88) - HRC (A)		20	20	20	32	32	40
MAINS CABLE No. CORES		3	3	3	3	3	3
MAX PIPE LENGTH (m)		30	30	30	55	65	65
MAX HEIGHT DIFFERENCE (m)		30	30	30	30	30	30
CHARGE REFRIGERANT (kg) / CO <sub>2</sub> EQUIVALENT (t) - R32 (GWP 675)		1.20 / 0.81 (7m)	1.25 / 0.84 (7m)	1.45 / 0.98 (7m)	3.10 / 2.09 (30m)	3.60 / 2.43 (30m)	3.60 / 2.43 (30m)
MAX ADDITIONAL REFRIGERANT (kg) / CO <sub>2</sub> EQUIVALENT (t) - R32 (GWP 675)		1.66 / 1.12	1.71 / 1.15	2.37 / 1.80	4.10 / 2.77	5.00 / 3.38	5.00 / 3.38

Note: Duty/standby not available on SUZ-M50/60/71VAR2/1.

PCA-M50KA DIMENSIONS		PCA-M60/71KA DIMENSIONS		PCA-M100/125/140KA DIMENSIONS	
LOWER VIEW	SIDE VIEW	LOWER VIEW	SIDE VIEW	LOWER VIEW	SIDE VIEW
FRONT VIEW		FRONT VIEW		FRONT VIEW	



Telephone: 01707 282880  
email: [air.conditioning@meuk.mee.com](mailto:air.conditioning@meuk.mee.com)  
les.mitsubishielectric.co.uk



Mitsubishi Electric Living Environmental Systems UK



Mitsubishi Electric Cooling and Heating UK



mitsubishielectricuk\_les



Mitsubishi Electric Living Environmental Systems UK



thehub.mitsubishielectric.co.uk

UNITED KINGDOM Mitsubishi Electric Europe Living Environment Systems Division, Travellers Lane, Hatfield, Hertfordshire, AL10 8XB, England. Telephone: 01707 282880 Fax: 01707 278881  
IRELAND Mitsubishi Electric Europe, Westgate Business Park, Ballymount, Dublin 24, Ireland. Telephone: (01) 419 8800 Fax: (01) 419 8890 International code: (003531)

Country of origin: United Kingdom - Japan - Thailand - Malaysia. ©Mitsubishi Electric Europe 2020. Mitsubishi and Mitsubishi Electric are trademarks of Mitsubishi Electric Europe B.V. The company reserves the right to make any variation in technical specification to the equipment described, or to withdraw or replace products without prior notification or public announcement. Mitsubishi Electric is constantly developing and improving its products. All descriptions, illustrations, drawings and specifications in this publication present only general particulars and shall not form part of any contract. All goods are supplied subject to the Company's General Conditions of Sale, a copy of which is available on request. Third-party product and brand names may be trademarks or registered trademarks of their respective owners.

Note: The fuse rating is for guidance only. Please refer to the relevant databook for detailed specification. It is the responsibility of a qualified electrician/electrical engineer to select the correct cable size and fuse rating based on current regulation and site specific conditions. Mitsubishi Electric's air conditioning equipment and heat pump systems contain a fluorinated greenhouse gas, R410A (GWP:2088), R32 (GWP:675), R407C (GWP:1774), R134a (GWP:1430), R513A (GWP:631), R454B (GWP:466), R1234ze (GWP:7) or R1234yf (GWP:4). \*These GWP values are based on Regulation (EU) No 517/2014 from IPCC 4th edition. In case of Regulation (EU) No.626/2011 from IPCC 3rd edition, these are as follows. R410A (GWP:1975), R32 (GWP:550), R407C (GWP:1650) or R134a (GWP:1300).

Effective as of May 2020



# PCA-M R32

## Ceiling Suspended System

Standard Inverter Heat Pump (Three Phase)

Mr. SLIM™

The **PCA-M Standard Inverter** range is a ceiling suspended system that blends a host of outstanding features with a sophisticated streamlined design. Offering advanced control options and quiet operation, this range provides extreme flexibility and ease of installation whilst being cost effective.

**R32**

### Key Features & Benefits:

- Flush to wall installation for concealment of service connections
- High / Low ceiling height modes
- Improved airflow control, including automatic air speed adjustment for greater comfort
- Replace Technology available
- Single fan chassis across entire outdoor unit range






PCA-M INDOOR UNITS		PCA-M100KA	PCA-M125KA	PCA-M140KA
CAPACITY (kW)	Heating (nominal)	11.2 (2.8-12.5)	13.5 (4.1-15.0)	15.0 (4.2-15.8)
	Cooling (nominal)	9.5 (4.0-10.6)	12.1 (5.7-13.0)	13.4 (5.7-14.1)
	Heating (UK)	9.63 (2.41-10.75)	11.61 (3.53-12.90)	12.90 (3.61-13.59)
	Cooling (UK)	8.65 (3.64-9.65)	11.01 (5.19-11.83)	12.19 (5.19-12.83)
SHF (nominal)		0.77	0.72	0.72
COP / EER (nominal)		3.41 / 3.23	3.41 / 3.01	3.50 / 2.50
SCOP (ηsh) / SEER (ηsc) (BS EN14825)		4.10 / 6.00	4.1 (162.7%) / 5.2 (213%)	4.0 (158.7%) / 5.1 (208%)
ERP ENERGY EFFICIENCY CLASS	Heating/Cooling	A+ / A+	A+ / A	A+ / A
AIRFLOW (l/s)	Lo-Mi1 - Mi2-Hi	367-400-433-467	383-417-450-483	400-433-483-533
PIPE SIZE mm (in)	Gas/ Liquid	15.88 (5/8") / 9.52 (3/8")	15.88 (5/8") / 9.52 (3/8")	15.88 (5/8") / 9.52 (3/8")
SOUND PRESSURE LEVEL (dBA)	Lo-Mi1 - Mi2-Hi	37-39-41-43	39-41-43-45	41-43-45-48
SOUND POWER LEVEL (dBA)		63	65	68
DIMENSIONS (mm)	Width x Depth x Height	1600 x 680 x 230	1600 x 680 x 230	1600 x 680 x 230
WEIGHT (kg)		37	38	40
ELECTRICAL SUPPLY		Fed by Outdoor Unit	Fed by Outdoor Unit	Fed by Outdoor Unit
FUSE RATING (BS88) - HRC (A)		6	6	6
INTERCONNECTING CABLE No. CORES		4	4	4
WIRED REMOTE CONTROLLER REFERENCE		PAR-40MAA	PAR-40MAA	PAR-40MAA
WIRELESS REMOTE CONTROLLER REFERENCE		PAR-SL94B	PAR-SL94B	PAR-SL94B

PUZ-M OUTDOOR UNITS		PUZ-M100YAR1 ③	PUZ-M125YAR1 ③	PUZ-M140YAR1 ③
SOUND PRESSURE LEVEL (dBA)	Heating/Cooling	51 / 54	54 / 56	55 / 57
SOUND POWER LEVEL (dBA)	Cooling	70	72	73
WEIGHT (kg)		76	84	84
DIMENSIONS (mm)	Width x Depth x Height	1050 x 330 x 981	1050 x 330 x 981	1050 x 330 x 981
ELECTRICAL SUPPLY		380-415v, 50Hz	380-415v, 50Hz	380-415v, 50Hz
PHASE		Three	Three	Three
SYSTEM POWER INPUT (kW)	Heating/Cooling (nominal)	3.28 / 2.94	3.95 / 4.01	4.28 / 5.36
	Heating/Cooling (UK)	2.95 / 2.44	3.56 / 3.33	3.85 / 4.45
STARTING CURRENT (A)		5.1	6.2	8.3
SYSTEM RUNNING CURRENT (A)	Heating/Cooling [MAX]	5.1 / 4.5 [11.5]	6.1 / 6.2 [11.5]	6.6 / 8.3 [11.5]
FUSE RATING (BS88) - HRC (A)		16	16	16
MAINS CABLE No. CORES		5	5	5
MAX PIPE LENGTH (m)		55	65	65
MAX HEIGHT DIFFERENCE (m)		30	30	30
CHARGE REFRIGERANT (kg) / CO <sub>2</sub> EQUIVALENT (t) - R32 (GWP 675)		3.10 / 2.09	3.60 / 2.43	3.60 / 2.43
MAX ADDITIONAL REFRIGERANT (kg) / CO <sub>2</sub> EQUIVALENT (t) - R32 (GWP 675)		4.10 / 2.77	5.00 / 3.38	5.00 / 3.38


③ Three Phase

### PCA-M100/125/140KA DIMENSIONS


LOWER VIEW

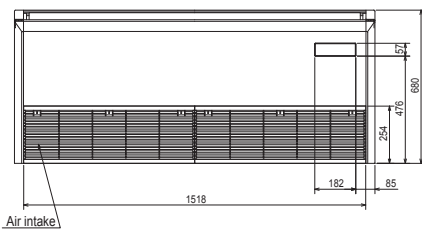

FRONT VIEW

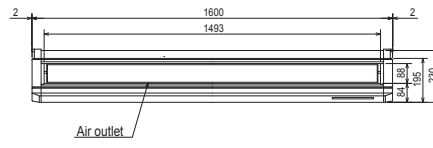

SIDE VIEW



Telephone: 01707 282880  
email: [air.conditioning@meuk.mee.com](mailto:air.conditioning@meuk.mee.com)  
[les.mitsubishielectric.co.uk](http://les.mitsubishielectric.co.uk)



Mitsubishi Electric Living  
Environmental Systems UK

Mitsubishi Electric  
Cooling and Heating UK

[mitsubishielectricuk\\_les](https://www.instagram.com/mitsubishielectricuk_les)

Mitsubishi Electric Living  
Environmental Systems UK

[thehub.mitsubishielectric.co.uk](http://thehub.mitsubishielectric.co.uk)

UNITED KINGDOM Mitsubishi Electric Europe Living Environment Systems Division, Travellers Lane, Hatfield, Hertfordshire, AL10 8XB, England. Telephone: 01707 282880 Fax: 01707 278881  
IRELAND Mitsubishi Electric Europe, Westgate Business Park, Ballymount, Dublin 24, Ireland. Telephone: (01) 419 8800 Fax: (01) 419 8890 International code: (003531)

Country of origin: United Kingdom - Japan - Thailand - Malaysia. ©Mitsubishi Electric Europe 2020. Mitsubishi and Mitsubishi Electric are trademarks of Mitsubishi Electric Europe B.V. The company reserves the right to make any variation in technical specification to the equipment described, or to withdraw or replace products without prior notification or public announcement. Mitsubishi Electric is constantly developing and improving its products. All descriptions, illustrations, drawings and specifications in this publication present only general particulars and shall not form part of any contract. All goods are supplied subject to the Company's General Conditions of Sale, a copy of which is available on request. Third-party product and brand names may be trademarks or registered trademarks of their respective owners.

Note: The fuse rating is for guidance only. Please refer to the relevant databook for detailed specification. It is the responsibility of a qualified electrician/electrical engineer to select the correct cable size and fuse rating based on current regulation and site specific conditions. Mitsubishi Electric's air conditioning equipment and heat pump systems contain a fluorinated greenhouse gas, R410A (GWP:2088), R32 (GWP:675), R407C (GWP:1774), R134a (GWP:1430), R513A (GWP:631), R454B (GWP:466), R1234ze (GWP:7) or R1234yf (GWP:4). \*These GWP values are based on Regulation (EU) No 517/2014 from IPCC 4th edition. In case of Regulation (EU) No.626/2011 from IPCC 3rd edition, these are as follows. R410A (GWP:1975), R32 (GWP:550), R407C (GWP:1650) or R134a (GWP:1300).

Effective as of May 2020

