


Interface Option to Manage Server Room Operation

The PAW-SERVER-PKEA server room interface manages redundancy and backup of two PKEA units with two different selectable modes:

- Plug and play by embedded redundancy and backup algorithm (no external signal needed. Further details please refer to operation manual)
- External (third party PLC) redundancy and backup management by dry contact

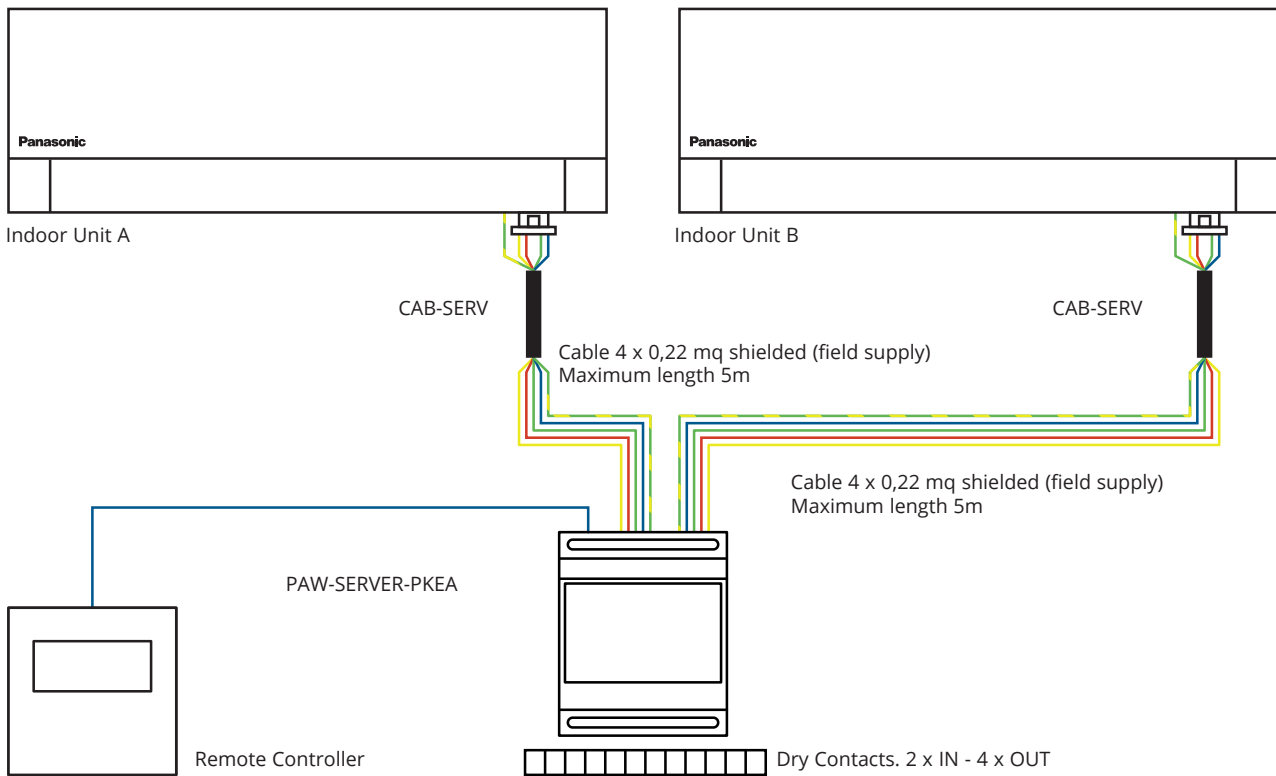

Main Features

- Cascade management
- Back Up system
- Overheating prevention
- ECO function
- BMS management available

Only available

- CS.ZXXTKEA
- CS.EXXQKE / PKE / NKE

All settings are possible without the need for a computer connection.

A special Energy Saving Mode is selectable by dip switch (available only in plug and play mode). The level of remote control input prohibition can be set when external management is by dry contact.



CU-E9PKEA  
CU-E12PKEA

CU-E15PKEA  
CU-E18PKEA