

# PLFY-M-VEM6-E

## 4-Way Blow Ceiling Cassette

CITY MULTI

The **PLFY-M-VEM6-E** offers 72 different airflow patterns, with the ability to handle a multitude of ceiling applications up to 4.2 metres in height. The easy to install, slim unit is ideal for maintaining constant temperatures, thanks to adjustable vanes that allow users to precisely direct air where it's needed.



### Key Features & Benefits:


- High sensible cooling capacity combined with improved airflows, enabling better off-coil temperatures for enhanced occupant comfort levels
- Optional 3D i-see sensor grille - (PLP-6EAE) provides customised comfort by automatically monitoring room occupancy, position and body temperatures
- Optional filter lowering operation - down to 4m (PLP-6EAJ)
- Compatible with Plasma Quad Connect - an innovative, bolt-on air purifying device which neutralises viruses, bacteria, allergens, PM2.5, mould and dust (PAC-SK51FT-E)





PLFY-M-VE6-E INDOOR UNITS		PLFY-M32VE6-E	PLFY-M40VE6-E	PLFY-M50VE6-E	PLFY-M63VE6-E	PLFY-M80VE6-E	PLFY-M100VE6-E	PLFY-M125VE6-E
CAPACITY (kW)	Heating (nominal)	4.0	5.0	6.3	8.0	10.0	12.5	16.0
	Cooling (nominal)	3.6	4.5	5.6	7.1	9.0	11.2	14.0
	UK Heating	4.0	5.0	6.3	8.0	10.0	12.5	16.0
	UK Total Cooling - Hi (Sensible)	3.20 (3.00)	4.00 (3.50)	5.00 (4.60)	6.40 (5.8)	8.10 (6.70)	10.00 (7.70)	12.50 (9.10)
	UK Total Cooling - Mi1	3.16	3.88	4.13	5.38	6.97	9.37	12.01
POWER INPUT (kW)	Heating (nominal)	0.03	0.03	0.07	0.12	0.12	0.12	0.12
	Cooling (nominal)	0.03	0.03	0.06	0.09	0.12	0.12	0.12
AIRFLOW (l/s) Cooling	Lo-Mi1-Mi2-Hi	217-233-250-267	217-233-250-283	267-283-300-417	267-300-333-533	267-333-383-583	283-367-467-583	283-400-517-583
AIRFLOW (l/s) Heating	Lo-Mi1-Mi2-Hi	217-233-250-267	217-233-250-283	267-283-300-467	267-300-333-583	267-333-383-583	283-367-467-583	283-400-517-583
SOUND PRESSURE LEVEL (dBA) Cooling	Lo-Mi1-Mi2-Hi	26-27-29-31	26-27-29-31	27-29-31-38	27-30-32-43	28-33-37-46	29-35-41-46	30-37-45-46
	Lo-Mi1-Mi2-Hi	26-27-29-31	26-27-29-31	27-29-31-41	27-30-32-46	28-33-37-46	29-35-41-46	30-37-45-46
SOUND PRESSURE LEVEL (dBA) Heating	Lo-Mi1-Mi2-Hi	26-27-29-31	26-27-29-31	27-29-31-41	27-30-32-46	28-33-37-46	29-35-41-46	30-37-45-46
	(Grille)	19(5)	19(5)	24(5)	24(5)	27(5)	27(5)	27(5)
DIMENSIONS (mm)	Width (Grille)	840 (950)	840 (950)	840 (950)	840 (950)	840 (950)	840 (950)	840 (950)
	Depth (Grille)	840 (950)	840 (950)	840 (950)	840 (950)	840 (950)	840 (950)	840 (950)
	Height (Grille)	258 (40)	258 (40)	298 (40)	298 (40)	298 (40)	298 (40)	298 (40)
	Height (Grille)	258 (40)	258 (40)	298 (40)	298 (40)	298 (40)	298 (40)	298 (40)
ELECTRICAL SUPPLY		220-240v, 50Hz	220-240v, 50Hz	220-240v, 50Hz	220-240v, 50Hz	220-240v, 50Hz	220-240v, 50Hz	220-240v, 50Hz
PHASE		Single	Single	Single	Single	Single	Single	Single
RUNNING CURRENT (A)	Heating	0.25	0.25	0.60	0.90	0.94	0.94	0.94
	Cooling	0.32	0.32	0.52	0.74	0.97	0.97	0.97
FUSE RATING (BS88) - HRC (A)		6	6	6	6	6	6	6
MAINS CABLE No. Cores		3	3	3	3	3	3	3
GRILLE MODEL REFERENCE		PLP-6EA	PLP-6EA	PLP-6EA	PLP-6EA	PLP-6EA	PLP-6EA	PLP-6EA

### PLFY-M32/40/50/63/80/100/125VE6-E DIMENSIONS

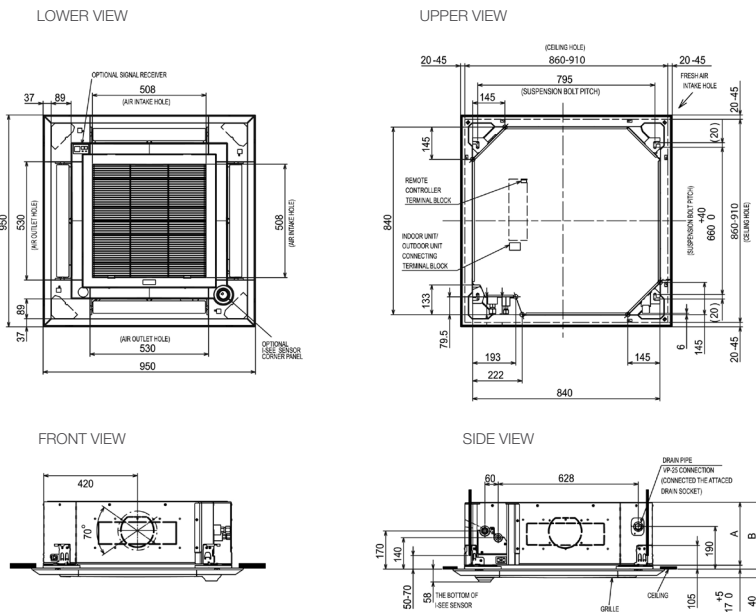

Telephone: 01707 282880  
email: [air.conditioning@meuk.mee.com](mailto:air.conditioning@meuk.mee.com)  
les.mitsubishielectric.co.uk



UNITED KINGDOM Mitsubishi Electric Europe Living Environment Systems Division, Travellers Lane, Hatfield, Hertfordshire, AL10 8XB, England. Telephone: 01707 282880 Fax: 01707 278881  
IRELAND Mitsubishi Electric Europe, Westgate Business Park, Ballymount, Dublin 24, Ireland. Telephone: (01) 419 8800 Fax: (01) 419 8890 International code: (003531)

Country of origin: United Kingdom - Japan - Thailand - Malaysia. ©Mitsubishi Electric Europe 2022. Mitsubishi and Mitsubishi Electric are trademarks of Mitsubishi Electric Europe B.V. The company reserves the right to make any variation in technical specification to the equipment described, or to withdraw or replace products without prior notification or public announcement. Mitsubishi Electric is constantly developing and improving its products. All descriptions, illustrations, drawings and specifications in this publication present only general particulars and shall not form part of any contract. All goods are supplied subject to the Company's General Conditions of Sale, a copy of which is available on request. Third-party product and brand names may be trademarks or registered trademarks of their respective owners.

Note: Refer to 'Installation Manual' and 'Instruction Book' for further 'Technical Information'. The fuse rating is for guidance only and please refer to the relevant databook for detailed specification. It is the responsibility of a qualified electrician/electrical engineer to select the correct cable size and fuse rating based on current regulation and site specific conditions. Mitsubishi Electric's air conditioning equipment and heat pump systems contain a fluorinated greenhouse gas, R410A (GWP:2088), R32 (GWP:675), R407C (GWP:1774), R134a (GWP:1430), R513A (GWP:631), R454B (GWP:466), R1234ze (GWP:7) or R1234yf (GWP:4). \*These GWP values are based on Regulation (EU) No 517/2014 from IPCC 4th edition. In case of Regulation (EU) No.626/2011 from IPCC 3rd edition, these are as follows. R410A (GWP:1975), R32 (GWP:550), R407C (GWP:1650) or R134a (GWP:1300).

Effective as of July 2022

