

EHPT18-21X-UKHLDWB

Versatile Slimline Cylinders
for Ecodan Monobloc Units



Key Features:

- Unvented, versatile DHW cylinder
- High capacity coil heat exchanger
- Diverter valve accessory supplied
- Advanced Mitsubishi Electric controls installed
- MELCloud Enabled

Key Benefits:

- Versatile product placement
- Maximises heat transfer
- Simplified heating & hot water system installation
- Quality assurance, giving peace of mind
- Remote control, monitoring, maintenance and technical support



MELCloud




ecodan[®]
Renewable Heating Technology

CYLINDER		EHPT18X-UKHLDWB	EHPT21X-UKHLDWB		
NOMINAL HOT WATER VOLUME (LITRES)		180	210		
ErP RATING		C	C		
HEAT LOSS (kWh/24hrs)		1.72	2.08		
HEAT LOSS (W)		72	87		
WATER		Flow Rate (l/min) - (H)WM 50 / 60 / 85 / 112 / 140	14 / 17 / 24 / 32 / 40		
Primary Circuit Pump			Local supply		
Heating Circuit Pump			Local supply		
Sanitary Hot Water Pump			N/A		
Connection Size (mm) Heating / DHW		22 / 22	22 / 22		
Charge Pressure (MPa (Bar))		0.30 (3.0)	0.30 (3.0)		
WATER SAFETY	Water Circuit	Control Thermistor (°C)	80		
	DHW Cylinder	DHW Expansion Vessel (Litres)	18		
		Control Thermistor (°C)	75		
		Over Temperature Cut-Out (°C)	80 +/- 5		
		Temp and Pressure Relief Valve (°C) / (MPa (Bar))	90°C / 7 Bar		
		Expansion Relief Valve (Cold) (MPa (Bar))	6 Bar		
DIMENSIONS (mm)		Width	475+0.2 ³		
		Depth	569.5		
		Height	2025		
WEIGHT EMPTY / FULL (kg)		50 / 218	50 / 258		
CYLINDER MATERIAL	Cylinder	Stainless Steel			
	Insulation	CFC / HCFC-free Polyurethane			
		Insulation Thickness (mm)	50		
		GWp of Insulation	1		
ELECTRICAL DATA	Control Board - <i>optionally powered by outdoor unit</i>	Electrical Supply	220-240v ~, 50Hz		
		Phase	Single		
		Fuse Rating - MCB Sizes (A) ^{*1}	16		
	Immersion Heater	Electrical Supply	220-240v ~, 50Hz		
		Phase	Single		
		Capacity (kW)	3		
		Max Running Current (A)	13		
		Fuse Rating - MCB Sizes (A) ^{*1}	16		
		MECHANICAL ZONES		DHW and 1 Heating Zone ^{*2}	
		OPTIONAL SIMPLIFIED WIRELESS ROOM THERMOSTAT AND WIRELESS RECEIVER		PAR-WT60R-E Controller and PAR-WR61R-E Receiver	

Notes: *1 MCB Sizes BS EN60998-2 & BS EN60947-2. *2 Optional 2 zone accessory pack available. *3 Temperature and Pressure Relief Valve. Cylinder includes: Flow Temperature Controller (FTC6) with Main Controller and Temperature Sensors, Diverter Valve, Coil Heat Exchanger, 3kW Immersion Heater, Expansion Vessel, MELCloud Wi-Fi Interface, Drain Valve, Tundish and Cold Water Combination Valve.

EHPT18-21X-UKHLDWB DIMENSIONS All dimensions (mm)

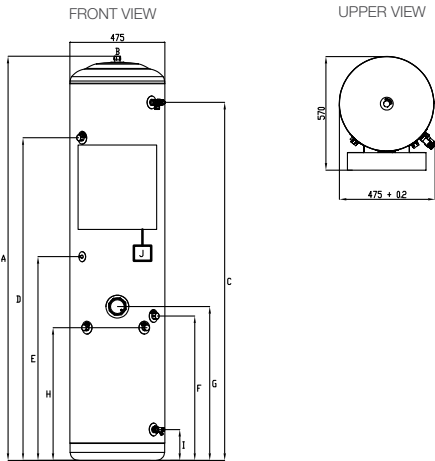

Letter	Pipe Description	Connection size/type
A	Overall height	
B	Hot Water Outlet	22mm Compression (3/4" Male BSP)
C	Temperature & Pressure Relief Valve	
D	Secondary Return Tapping	22mm Compression (3/4" Male BSP)
E	THW5A Sensor Pocket	
F	Cold Water Inlet	22mm Compression (3/4" Male BSP)
G	Immersion heater	
H	Heat Pump Flow & Return Coil Connections	22mm Compression (3/4" Male BSP)
I	Drain Valve	22mm Compression (3/4" Male BSP)
J	Wi-Fi Adaptor (Installer to locate and mount)	

Capacity	150	170
A	1712	2025
C	1479	1795
D	N/A	1615
E	864	1020
F	726	726
G	756	769
H	668	668
I	158	158
J	Installer to locate and mount	

MITSUBISHI ELECTRIC
Changes for the Better
Telephone: 01707 282880
email: heating@meuk.mee.com
ecodan.co.uk

@Ecodanheating
 Mitsubishi Electric Heating UK
 @MitsubishiElectricHeatingUK
 mitsubishi_electric_heating_uk
 Mitsubishi Electric Heating UK
 thehub.mitsubishielectric.co.uk

UNITED KINGDOM Mitsubishi Electric Europe Living Environment Systems Division, Travellers Lane, Hatfield, Hertfordshire, AL10 8XB, England. Telephone: 01707 282880 Fax: 01707 278881
IRELAND Mitsubishi Electric Europe, Westgate Business Park, Ballymount, Dublin 24, Ireland. Telephone: (01) 419 8800 Fax: (01) 419 8890 International code: (003531)

Country of origin: United Kingdom - Japan - Thailand - Malaysia. ©Mitsubishi Electric Europe 2023. Mitsubishi and Mitsubishi Electric are trademarks of Mitsubishi Electric Europe B.V. The company reserves the right to make any variation in technical specification to the equipment described, or to withdraw or replace products without prior notification or public announcement. Mitsubishi Electric is constantly developing and improving its products. All descriptions, illustrations, drawings and specifications in this publication present only general particulars and shall not form part of any contract. All goods are supplied subject to the Company's General Conditions of Sale, a copy of which is available on request. Third-party product and brand names may be trademarks or registered trademarks of their respective owners.

Note: Refer to 'Installation Manual' and 'Instruction Book' for further 'Technical Information'. The fuse rating is for guidance only and please refer to the relevant databook for detailed specification. It is the responsibility of a qualified electrician/electrical engineer to select the correct cable size and fuse rating based on current regulation and site specific conditions. Mitsubishi Electric's air conditioning equipment and heat pump systems contain a fluorinated greenhouse gas, R410A (GWP:2088), R32 (GWP:675), R407C (GWP:1774), R134a (GWP:1430), R513A (GWP:631), R454B (GWP:466), R1234ze (GWP:7) or R1234yf (GWP:4). *These GWP values are based on Regulation (EU) No 517/2014 from IPCC 4th edition. In case of Regulation (EU) No.626/2011 from IPCC 3rd edition, these are as follows. R410A (GWP:1975), R32 (GWP:550), R407C (GWP:1650) or R134a (GWP:1300).

Effective as of May 2023