


OUTLINES AND DIMENSIONS

Dimensions - 28 mm Standard Models

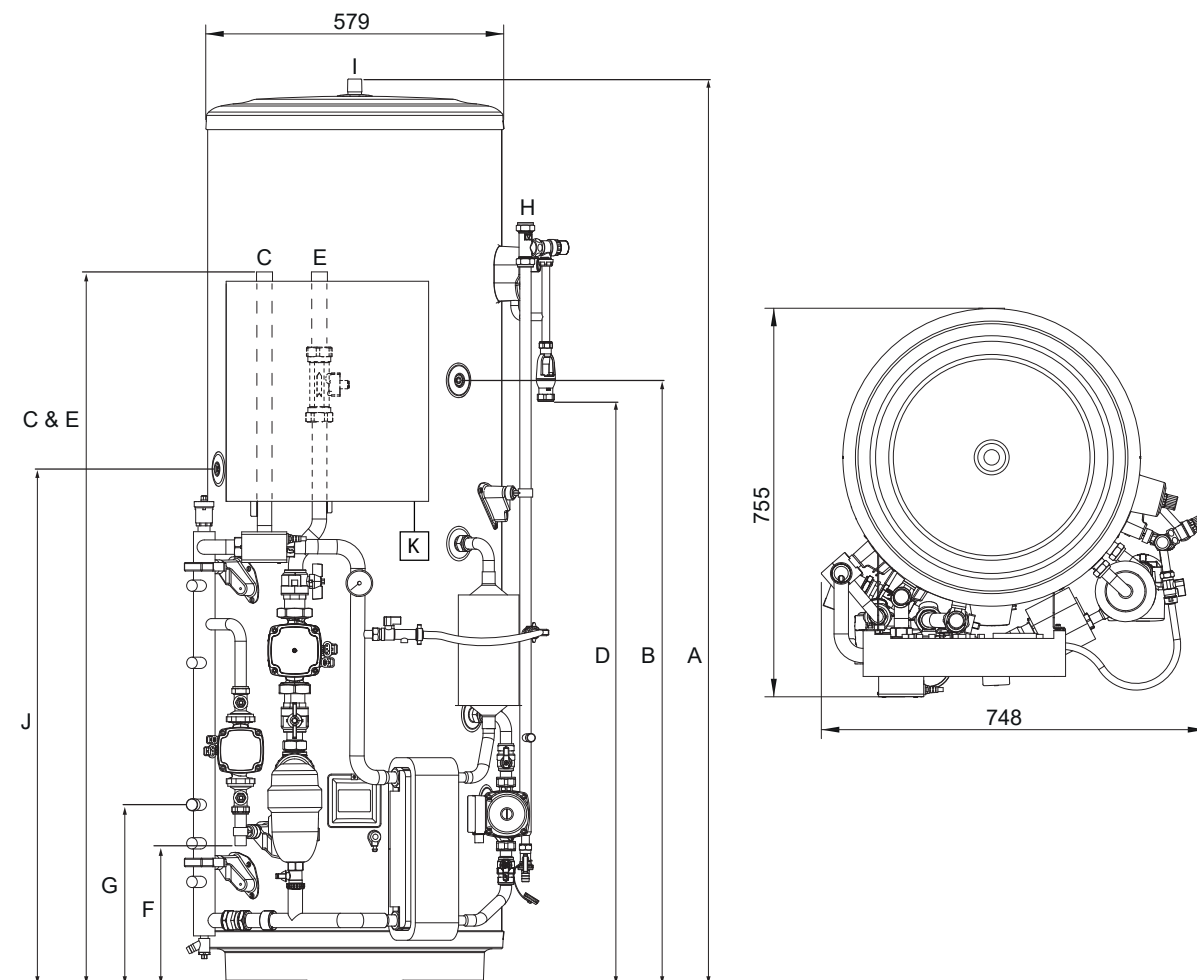


KEY

- A OVERALL HEIGHT
- B SECONDARY RETURN TAPPING
- C HEAT PUMP FLOW CONNECTION (28 mm O/D COPPER)
- D TUNDISH OUTLET CONNECTION (22 mm COMPRESSION)
- E HEAT PUMP RETURN CONNECTION (28 mm O/D COPPER)
- F HEATING ZONE 1 CIRCUIT FLOW CONNECTION (22 mm O/D COPPER)
- G HEATING ZONE 1 CIRCUIT RETURN CONNECTION (22 mm O/D COPPER)
- H COLD WATER INLET CONNECTION (22 mm COMPRESSION)
- I HOT WATER OUTLET CONNECTION (22 mm COMPRESSION/3/4" BSP M)
- J THW5A SENSOR POCKET
- K Wi-Fi ADAPTOR (INCLUDED, INSTALLER TO LOCATE AND MOUNT)

CAPACITY	210	250	300
A	1509	1761	2075
B	1050	1175	1385
C	1370	1370	1370
D	880	1136	1450
E	1370	1370	1370
F	270	270	270
G	350	350	350
J	925	1005	1193
K	Installer to locate and mount		


Dimensions - 22 mm Standard Models

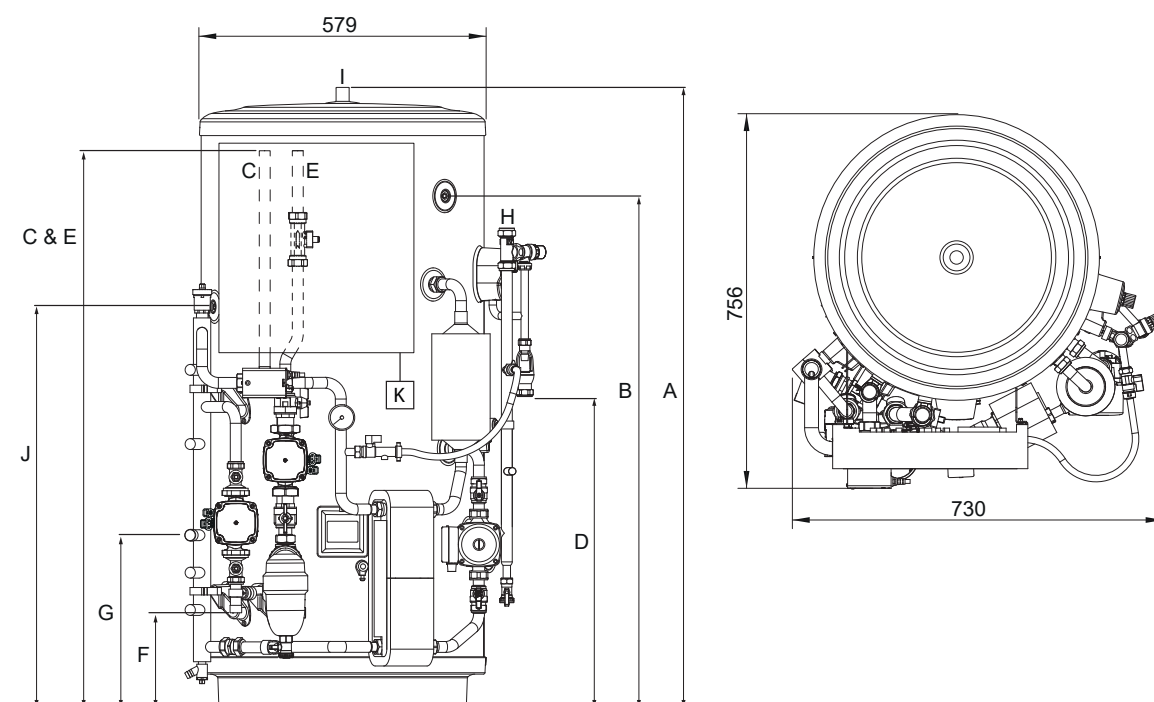

KEY

- A OVERALL HEIGHT
- B SECONDARY RETURN TAPPING (NOT FITTED TO EHPT15X-UKHEWS/EHPT17X-UKHEWS)
- C HEAT PUMP FLOW CONNECTION (22 mm O/D COPPER)
- D TUNDISH OUTLET CONNECTION (22 mm COMPRESSION)
- E HEAT PUMP RETURN CONNECTION (22 mm O/D COPPER)
- F HEATING ZONE 1 CIRCUIT FLOW CONNECTION (22 mm O/D COPPER)
- G HEATING ZONE 1 CIRCUIT RETURN CONNECTION (22 mm O/D COPPER)
- H COLD WATER INLET CONNECTION (22 mm COMPRESSION)
- I HOT WATER OUTLET CONNECTION (22 mm COMPRESSION/3/4" BSP M)
- J THW5A SENSOR POCKET
- K Wi-Fi ADAPTOR (INCLUDED, INSTALLER TO LOCATE AND MOUNT)

CAPACITY	150	170	210
A	1131	1257	1509
B	Not fitted	Not fitted	1050
C	1122	1122	1122
D	505	630	880
E	1122	1122	1122
F	194	194	194
G	350	350	350
J	675	815	925
K	Installer to locate and mount		

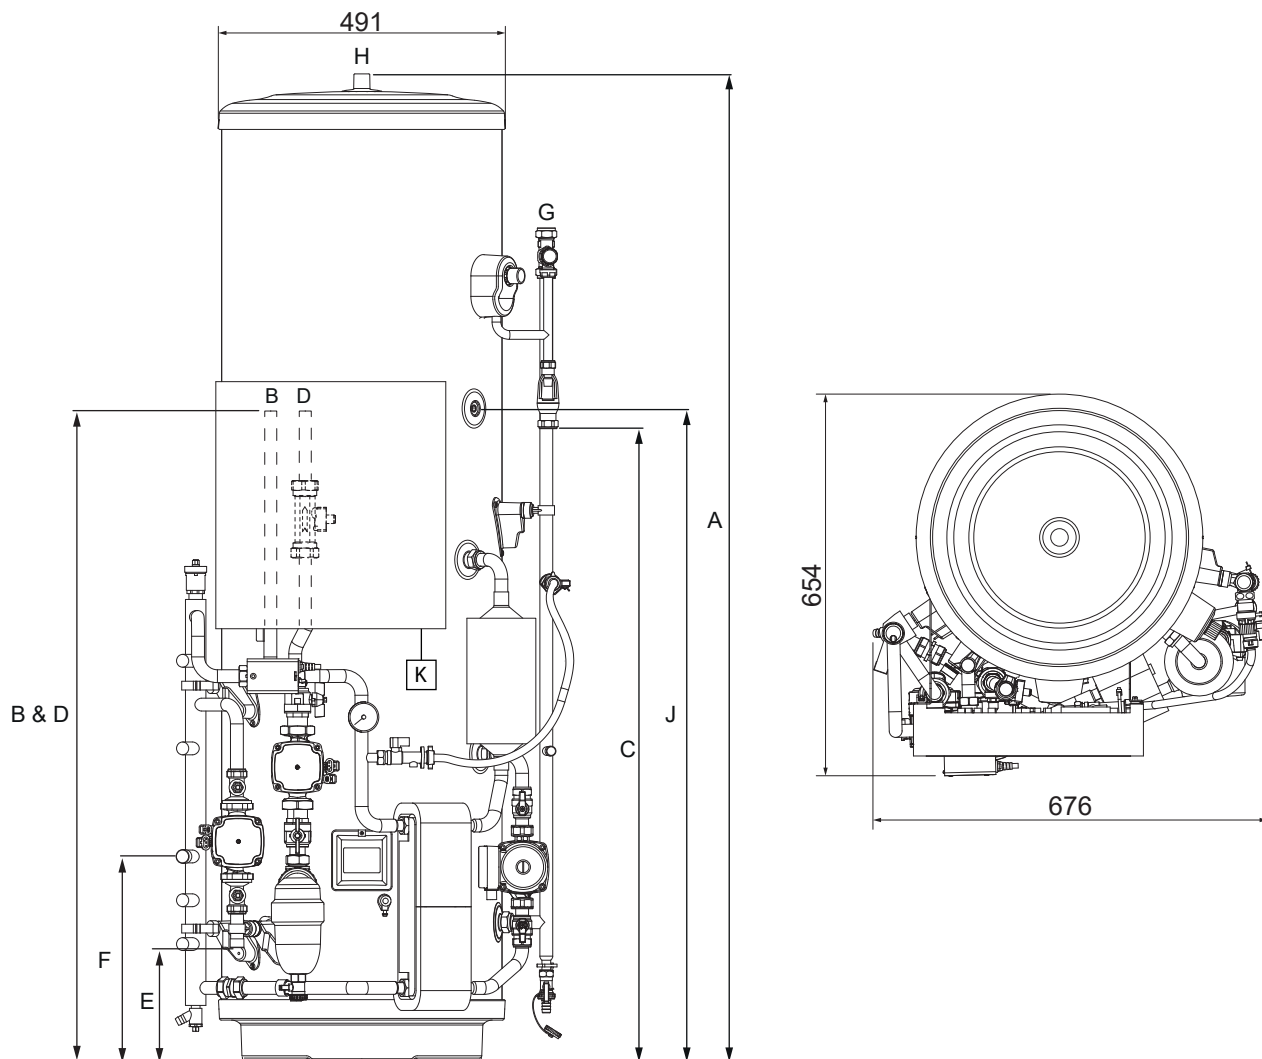


KEY

- A OVERALL HEIGHT
- B HEAT PUMP FLOW CONNECTION (22 mm O/D COPPER)
- C TUNDISH OUTLET CONNECTION (22 mm COMPRESSION)
- D HEAT PUMP RETURN CONNECTION (22 mm O/D COPPER)
- E HEATING ZONE 1 CIRCUIT FLOW CONNECTION (22 mm O/D COPPER)
- F HEATING ZONE 1 CIRCUIT RETURN CONNECTION (22 mm O/D COPPER)
- G COLD WATER INLET CONNECTION (22 mm COMPRESSION)
- H HOT WATER OUTLET CONNECTION (22 mm COMPRESSION/3/4" BSP M)
- J THW5A SENSOR POCKET
- K Wi-Fi ADAPTOR (INCLUDED, INSTALLER TO LOCATE AND MOUNT)


CAPACITY	150	170
A	1516	1690
B	1127	1127
C	909	1083
D	1127	1127
E	350	350
F	194	194
J	943	1117
K	Installer to locate and mount	

Service Access Diagram

Clearances - Side, Front & Rear

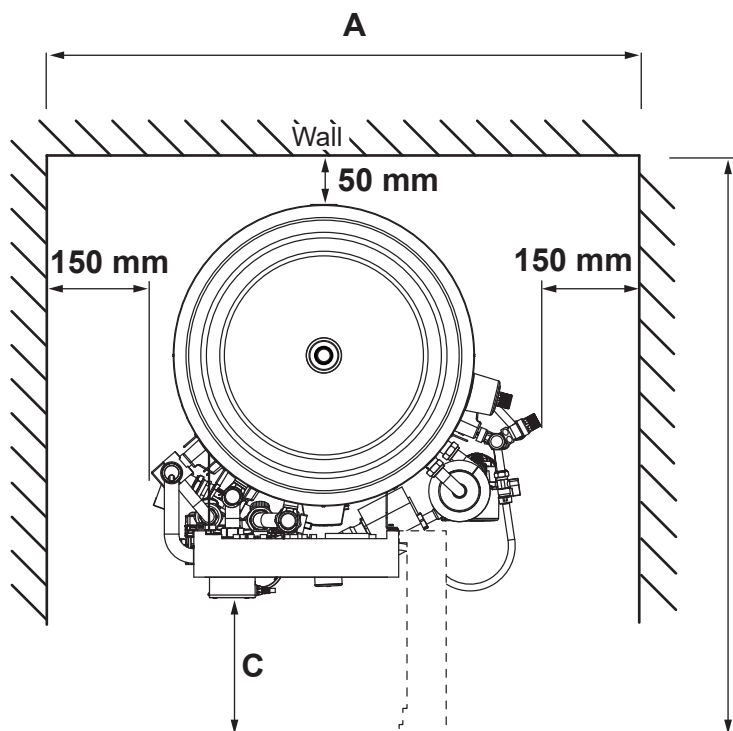

Clearances - Above

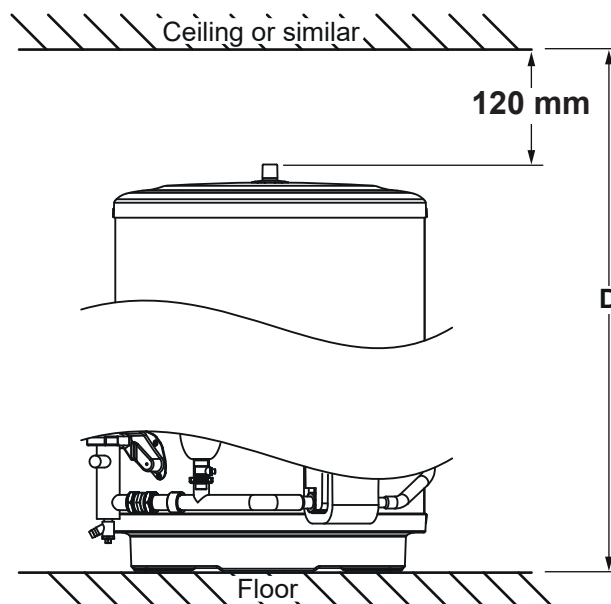

The cylinder must be located indoors and in a frost free environment, for example in a utility room, to minimise heat loss from the stored water. Please allow sufficient clearance at the front to close a door where fitted.

Sufficient space **MUST** be left for the provision of discharge pipework as detailed in National and Local Building Regulations.

Dimensions of A, B & C in above diagram

Model	Dimension		
	A	B	C
EHPT15X-UKHLEWS EHPT17X-UKHLEWS	976 mm	972 mm	268 mm
EHPT15X-UKHEWS EHPT17X-UKHEWS EHPT21X-UKHEWS	1030 mm	1066 mm	260 mm
EHPT21X-UKHEWL EHPT25X-UKHEWL EHPT30X-UKHEWL	1048 mm	1066 mm	260 mm

Dimension of D in above diagram

Model	Dimension D
EHPT15X-UKHLEWS	1636 mm
EHPT17X-UKHLEWS	1810 mm
EHPT15X-UKHEWS	1251 mm
EHPT17X-UKHEWS	1377 mm
EHPT21X-UKHEWS	1629 mm
EHPT21X-UKHEWL	1629 mm
EHPT25X-UKHEWL	1881 mm
EHPT30X-UKHEWL	2195 mm