

CP-500CM-L/R

Cooling Module



Enhance your home's protection against overheating with the **CP-500CM-L/R** cooling module - perfectly paired with the VL-500CZPVU-L/R-E residential Lossnay MVHR. This innovative system delivers tempered fresh air to help prevent overheating, supporting compliance with Part O building regulations.

Featuring a self-contained direct expansion system, advanced inverter technology, and lower GWP R32 refrigerant, it provides efficient cooling while meeting sustainability targets. Designed with Part O compliance at its core, it offers flexible activation temperatures, customisable capacity steps, and overshoot temperature controls, giving you total confidence in maintaining compliant indoor conditions.

R32

Key Features & Benefits:

- Multi-zone activation - connect up to four room temperature sensors to detect cooling requirements from different areas
- Low system height - efficient use of space, maximising a home's floor area by allowing other services to be placed underneath the system
- Quiet performance - enjoy a restful nights sleep even in the hottest summer's without the distraction of excess noise
- Eco-friendly & efficient - the inverter-controlled compressor uses lower GWP R32 refrigerant, delivering powerful cooling while reducing environmental impact
- Hassle-free installation - designed for simplicity, ensuring a smooth and efficient setup process
- Flexible airflow - operational airflow as low as 50l/s allows precise capacity selection for each home's unique needs
- Behind-the-scenes control - ensures adherence to Part O regulations, while preventing unnecessary end-user adjustments



MODEL		CP-500CM-L/R
OPERATION AIR FLOW (l/s)		50 - 140
DIMENSIONS (mm) (Width x Depth x Height)	Module	725 x 556 x 497
	System	725 x 586 x 1169
WEIGHT (kg)	Module	38
	System	77
REFRIGERANT		R32
REFRIGERANT CHARGE (kg)		0.55
COMPRESSOR MANAGEMENT		Inverter
SOUND POWER LEVEL (dB(A))		52.4
DUCT SPIGOT SIZE (mm)		160
ELECTRICAL SUPPLY		220-240V, 50Hz
MAX RUNNING CURRENT (A)		7.6
FUSE RATING (BS88) - HRC (A)		10

MODEL		Procon Overheat Thermostat (OHT)	
DESCRIPTION		Manages activation and operation of cooling function. Reads internal temperature against set activation point, and manages interlock signals and system status	
CONNECT TO		VL-500CZPVU-L/R-E CP-500CM-L/R	
ELECTRICAL SUPPLY		Powered via Lossnay MVHR CN105	
DIMENSIONS (mm)	Width x Depth x Height	190 x 42 x 180	
WEIGHT (kg)		1.1	
CONTROL	Temperature Input	Up to 4x 10K3A1 ¹	
	Heating Interlock	VFC	
	Manual Activation	VFC	
	Block	VFC	


Notes: *1 1 x 10K3A1 temperature sensor supplied with Procon OHT. VFC: Volt Free Contact

CP-500CM-L/R DIMENSIONS

All dimensions are in millimetres


LOSSNAY + COOLING MODULE

LEFT CONFIGURATION

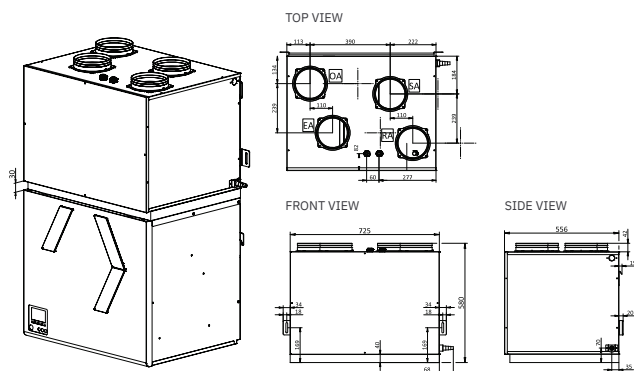


LOSSNAY + COOLING MODULE

RIGHT CONFIGURATION

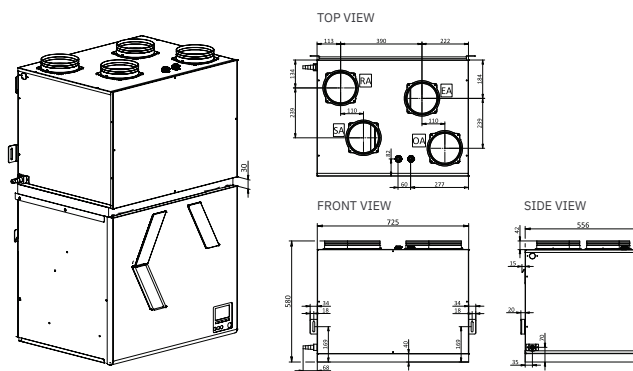

Telephone: 01707 282880
email: air.conditioning@meuk.mee.com
les.mitsubishielectric.co.uk



UNITED KINGDOM Mitsubishi Electric Europe Living Environment Systems Division, Travellers Lane, Hatfield, Hertfordshire, AL10 8XB, England. Telephone: 01707 282880
IRELAND Mitsubishi Electric Europe, Plunkett House, Grange Castle Business Park, Nangor Road, Dublin 22, Ireland. Telephone: (00353) 1 4198800. Email: sales.info@meir.mee.com Web: les.mitsubishielectric.ie

Country of origin: United Kingdom - Italy - Turkey - Japan - Thailand - Malaysia. ©Mitsubishi Electric Europe 2025. Mitsubishi and Mitsubishi Electric are trademarks of Mitsubishi Electric Europe B.V. The company reserves the right to make any variation in technical specification of the equipment developed and/or without any notification or public announcement. Mitsubishi Electric is constantly developing and improving its products. All illustrations, drawings and specifications in this publication present only general particulars and shall not form part of any contract. All goods are supplied subject to the Company's General Conditions of Sale, a copy of which is available on request. Third-party product and brand names may be trademarks or registered trademarks of their respective owners.

Note: The use rating is for guidance only and please refer to the relevant databook for detailed specification. It is the responsibility of a qualified electrician/electrical engineer to select the correct cable size and fuse rating based on current calculation and site specific conditions. Mitsubishi Electric's air conditioning equipment and built-in air systems contain a fluorinated greenhouse gas R410A (GWP:2088), R290 (GWP:3), R32 (GWP:675), R407C (GWP:1774), R134a (GWP:1430), R153A (GWP:631), R454B (GWP:466), R454C (GWP:148), R1234ze (GWP:7) or R1234yf (GWP:4). These GWP values are based on Regulation (EU) No 517/2010 from IPCC 4th edition. In case of Regulation (EU) No.826/2011 from IPCC 3rd edition, these values are as follows. R410A(GWP: 1975), R32 (GWP:550), R407C (GWP:1650) or R134a (GWP:1300).

Effective as of March 2025

