

# R2 Series Standard Efficiency Heat Recovery (22-45kW)



Many buildings require heating and cooling simultaneously, even between adjacent rooms. The **City Multi R2 Heat Recovery system** efficiently redistributes surplus heat where it's needed, delivering up to 30% energy savings over conventional systems.

As the only 2-pipe heat recovery solution on the market, the modular City Multi R2 range simplifies installation and maintenance while offering complete design flexibility for applications such as hotels, offices, and leisure spaces.

## Key Features & Benefits:


- **Heat Recovery Operation** - Delivers up to 30% energy savings compared to heat pump systems through advanced heat recovery
- **Lower GWP R32 Refrigerant** - for reduced carbon impact and future-ready legislation compliance
- **Simultaneous Heating & Cooling** - Meets diverse comfort needs across different zones at the same time for optimal occupant satisfaction
- **Unique 2-Pipe System** - Simplifies installation and maintenance while reducing system complexity
- **Ultra-Compact Modular Design** - Smaller unit footprint allows installation in tight spaces without compromising on performance
- **Broad Indoor Unit Compatibility** - Connects to a wide range of unit types and capacities, making it suitable for varied building applications
- **Extended Heating Range (-25°C)** - Ensures reliable heating even in severe winter conditions by maintaining efficient system operation
- **Easy-to-Maintain Safety Feature Options** - For reduced onsite time and costs while supporting occupant peace of mind
- **Enhanced Defrost Technology** - Reduces system downtime during defrost cycles, minimising temperature fluctuations and maintaining reliable indoor heating for consistent occupant comfort
- **Low Noise Operation** - Features a 5-step low noise mode that minimises sound levels for quieter surroundings
- **113m Vertical Height Separation** - Offers generous height allowance between indoor and outdoor units, enabling design flexibility in larger buildings





| PURY-M-Y(S)XM-A OUTDOOR UNITS  |                               | PURY-M200YXM-A      | PURY-M250YXM-A      | PURY-M300YXM-A      | PURY-M350YXM-A      | PURY-M400YXM-A      | PURY-M400YSXM-A       |
|--|-------------------------------|---------------------|---------------------|---------------------|---------------------|---------------------|-----------------------|
| CAPACITY (kW)  | Heating (Max)                 | 25.0                | 31.5                | 37.5                | 45.0                | 50.0                | 50.0                  |
|  | Cooling (nominal)             | 22.4                | 28.0                | 33.5                | 40.0                | 45.0                | 44.8                  |
|  | High Performance Heating (UK) | TBC                 | TBC                 | TBC                 | TBC                 | TBC                 | TBC                   |
|  | COP Priority Heating (UK)     | TBC                 | TBC                 | TBC                 | TBC                 | TBC                 | TBC                   |
|  | Cooling (UK)                  | TBC                 | TBC                 | TBC                 | TBC                 | TBC                 | TBC                   |
| POWER INPUT (kW)   | Heating (Max)                 | 5.65                | 7.79                | 9.61                | 12.64               | 14.04               | 11.68                 |
|  | Cooling (nominal)             | 5.53                | 7.79                | 9.43                | 11.62               | 13.39               | 11.17                 |
|  | High Performance Heating (UK) | TBC                 | TBC                 | TBC                 | TBC                 | TBC                 | TBC                   |
|  | COP Priority Heating (UK)     | TBC                 | TBC                 | TBC                 | TBC                 | TBC                 | TBC                   |
|  | Cooling (UK)                  | TBC                 | TBC                 | TBC                 | TBC                 | TBC                 | TBC                   |
| COP / EER (Max/Nominal)  | 4.42 / 4.05                   | 4.04 / 3.59         | 3.90 / 3.55         | 3.56 / 3.44         | 3.56 / 3.36         | 4.28 / 4.01         |                       |
| SCOP / SEER  | 4.69 / 7.72                   | 4.66 / 7.37         | 4.66 / 7.66         | 4.71 / 7.89         | 4.56 / 7.53         | 4.69 / 7.67         |                       |
| MAX NO. OF CONNECTABLE INDOOR UNITS  |                               | 14                  | 18                  | 22                  | 25                  | 29                  | 29                    |
| MAX CONNECTABLE CAPACITY   |                               | 50~150% OU Capacity   |
| AIRFLOW (m³/min)   | High                          | 170                 | 180                 | 235                 | 220                 | 260                 | 170 / 170             |
|  | Gas                           | 19.05 (3/4")        | 22.2 (7/8")         | 22.2 (7/8")         | 28.58 (1-1/8")      | 28.58 (1-1/8")      | 28.58 (1-1/8")        |
| PIPE SIZE mm (in)  | Liquid                        | 15.88 (5/8")        | 19.05 (3/4")        | 19.05 (3/4")        | 19.05 (3/4")        | 22.2 (7/8")         | 22.2 (7/8")           |
|  | Heating / Cooling             | 57.5 / 56.0         | 58.0 / 56.0         | 63.5 / 60.5         | 63.0 / 57.5         | 64.0 / 61.0         | 61.0 / 60.0           |
| SOUND POWER LEVEL (dBa) @ 1m   | Heating / Cooling             | 78.0 / 75.0         | 79.0 / 78.0         | 83.0 / 80.0         | 82.0 / 78.0         | 86.0 / 82.0         | 82.0 / 79.0           |
| SOUND POWER LEVEL (dBa) @ 100% Capacity  | Heating / Cooling             | TBC                 | TBC                 | TBC                 | TBC                 | TBC                 | TBC                   |
| SOUND POWER LEVEL (dBa) @ 90% Capacity   | Heating / Cooling             | TBC                 | TBC                 | TBC                 | TBC                 | TBC                 | TBC                   |
| SOUND POWER LEVEL (dBa) @ 75% Capacity   | Heating / Cooling             | TBC                 | TBC                 | TBC                 | TBC                 | TBC                 | TBC                   |
| WEIGHT (kg)  |                               | 265                 | 265                 | 266                 | 322                 | 327                 | 265 +265              |
| DIMENSIONS (mm)  | Width                         | 910                 | 910                 | 910                 | 1207                | 1207                | 910 + 910             |
|  | Depth                         | 740                 | 740                 | 740                 | 740                 | 740                 | 740                   |
|  | Height                        | 1858                | 1858                | 1858                | 1858                | 1858                | 1858                  |
| (1798mm without legs)  |                               |                     |                     |                     |                     |                     |                       |
| ELECTRICAL SUPPLY <sup>1</sup>   |                               | 380-415v, 50Hz        |
| PHASE <sup>1</sup>   |                               | Three               | Three               | Three               | Three               | Three               | Three                 |
| STARTING CURRENT (A) <sup>1</sup>  |                               | TBC                 | TBC                 | TBC                 | TBC                 | TBC                 | TBC                   |
| NOMINAL SYSTEM RUNNING CURRENT (A) <sup>1</sup>                                | Heating / Cooling [MAX]       | 9.0 / 8.8 [TBC]     | 12.4 / 12.4 [TBC]   | 15.4 / 15.1 [TBC]   | 20.2 / 18.6 [TBC]   | 22.5 / 21.4 [TBC]   | 18.7 / 17.9 [TBC]     |
| GUARANTEED OPERATING RANGE (°C)  | Heating / Cooling             | -25~-15.5 / -5~-52  | -25~-15.5 / -5~-52  | -25~-15.5 / -5~-52  | -25~-15.5 / -5~-52  | -25~-15.5 / -5~-52  | -25~-15.5 / -5~-52    |
| FUSE RATING (MCB sizes BS EN 60947-2) - (A) <sup>1</sup>                       |                               | TBC                 | TBC                 | TBC                 | TBC                 | TBC                 | TBC                   |
| MAINS CABLE No. Cores <sup>1</sup>   |                               | 4 + earth           | 4 + earth / 4 + earth |
| CHARGE REFRIGERANT (kg) / CO <sub>2</sub> EQUIVALENT (t) R32 (GWP 675)         |                               | 8.0 / 5.4           | 8.0 / 5.4           | 8.0 / 5.4           | 9.3 / 6.3           | 9.3 / 6.3           | 16.0 / 10.8           |
| MAX ADDITIONAL REFRIGERANT (kg) / CO <sub>2</sub> EQUIVALENT (t) R32 (GWP 675) |                               | TBC                 | TBC                 | TBC                 | TBC                 | TBC                 | TBC                   |

Notes: ErP Lot 6 calculation method to EN14825. <sup>1</sup> A separate power supply is required for each module. Where more than one figure is quoted there are multiple modules.

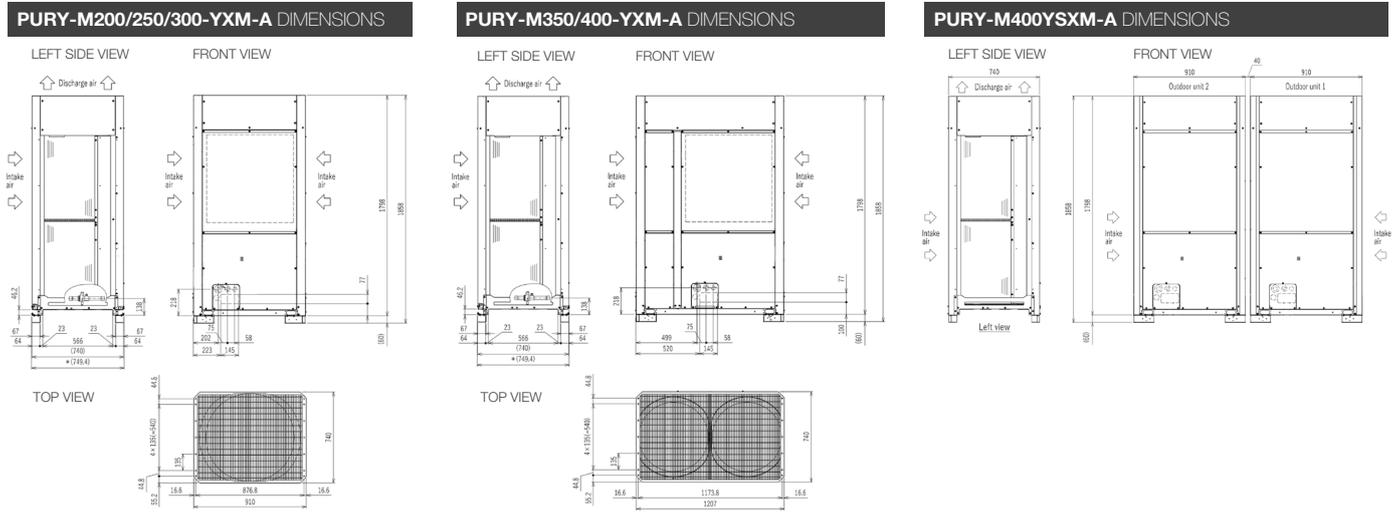

**MITSUBISHI ELECTRIC**  
*Changes for the Better*  
 Telephone: 01707 282880  
 email: [air.conditioning@meuk.mee.com](mailto:air.conditioning@meuk.mee.com)  
[les.mitsubishielectric.co.uk](http://les.mitsubishielectric.co.uk)

@meuk\_les @green\_gateway |
 Mitsubishi Electric Living Environmental Systems UK |
 Mitsubishi Electric Cooling and Heating UK |
 mitsubishielectricuk\_les |
 Mitsubishi Electric Living Environmental Systems UK |
 [thehub.mitsubishielectric.co.uk](http://thehub.mitsubishielectric.co.uk)

UNITED KINGDOM Mitsubishi Electric Europe Living Environment Systems Division, Travellers Lane, Hatfield, Hertfordshire, AL10 8XB, England. Telephone: 01707 282880  
 IRELAND Mitsubishi Electric Europe, Plunkett House, Grange Castle Business Park, Nangor Road, Dublin 22, Ireland. Telephone: (00353) 1 4198800 Email: [sales.info@meir.mee.com](mailto:sales.info@meir.mee.com) Web: [les.mitsubishielectric.ie](http://les.mitsubishielectric.ie)

Country of origin: United Kingdom - Italy - Turkey - Japan - Thailand - Malaysia. ©Mitsubishi Electric Europe 2025. Mitsubishi and Mitsubishi Electric are trademarks of Mitsubishi Electric Europe B.V. The company reserves the right to make any variation in technical specification to the equipment described, or to withdraw or replace products without prior notification or public announcement. Mitsubishi Electric is constantly developing and improving its products. All descriptions, illustrations, drawings and specifications in this publication present only general particulars and shall not form part of any contract. All goods are supplied subject to the Company's General Conditions of Sale, a copy of which is available on request. Third-party product and brand names may be trademarks or registered trademarks of their respective owners.

Note: The fuse rating is for guidance only and please refer to the relevant databook for detailed specification. It is the responsibility of a qualified electrician/electrical engineer to select the correct cable size and fuse rating based on current regulation and site specific conditions. Mitsubishi Electric's air conditioning equipment and heat pump systems contain a fluorinated greenhouse gas, R410A (GWP:2088), R32 (GWP:675), R407C (GWP:1774), R134a (GWP:1430), R513A (GWP:631), R454B (GWP:466), R515B (GWP:292), R454C (GWP:148), R1234ze (GWP:7) or R1234yf (GWP:4). \*These GWP values are based on Regulation (EU) No 517/2014 from IPCC 4th edition. Mitsubishi Electric's air conditioning equipment and heat pump systems contain a hydrocarbon, R290 (GWP:0.02). \*These GWP values are based on IPCC 6th edition.

Effective as of December 2025



# R2 Series Standard Efficiency Heat Recovery (50-67kW)



Many buildings require heating and cooling simultaneously, even between adjacent rooms. The **City Multi R2 Heat Recovery system** efficiently redistributes surplus heat where it's needed, delivering up to 30% energy savings over conventional systems.

As the only 2-pipe heat recovery solution on the market, the modular City Multi R2 range simplifies installation and maintenance while offering complete design flexibility for applications such as hotels, offices, and leisure spaces.



## Key Features & Benefits:

- **Heat Recovery Operation** - Delivers up to 30% energy savings compared to heat pump systems through advanced heat recovery
- **Lower GWP R32 Refrigerant** - for reduced carbon impact and future-ready legislation compliance
- **Simultaneous Heating & Cooling** - Meets diverse comfort needs across different zones at the same time for optimal occupant satisfaction
- **Unique 2-Pipe System** - Simplifies installation and maintenance while reducing system complexity
- **Ultra-Compact Modular Design** - Smaller unit footprint allows installation in tight spaces without compromising on performance
- **Broad Indoor Unit Compatibility** - Connects to a wide range of unit types and capacities, making it suitable for varied building applications
- **Extended Heating Range (-25°C)** - Ensures reliable heating even in severe winter conditions by maintaining efficient system operation
- **Easy-to-Maintain Safety Feature Options** - For reduced onsite time and costs while supporting occupant peace of mind
- **Enhanced Defrost Technology** - Reduces system downtime during defrost cycles, minimising temperature fluctuations and maintaining reliable indoor heating for consistent occupant comfort
- **Low Noise Operation** - Features a 5-step low noise mode that minimises sound levels for quieter surroundings
- **113m Vertical Height Separation** - Offers generous height allowance between indoor and outdoor units, enabling design flexibility in larger buildings







| PURY-M-Y(S)XM-A OUTDOOR UNITS  |                               | PURY-M450YXM-A          | PURY-M450YSXM-A       | PURY-M500YXM-A      | PURY-M500YSXM-A       | PURY-M550YSXM-A                           | PURY-M600YSXM-A                           |
|--|-------------------------------|-------------------------|-----------------------|---------------------|-----------------------|---|---|
| CAPACITY (kW)  | Heating (Max)                 | 56.0                    | 56.5                  | 58.0                | 63.0                  | 69.0                                      | 75.0                                      |
|  | Cooling (nominal)             | 50.0                    | 50.4                  | 56.0                | 56.0                  | 61.5                                      | 67.0                                      |
|  | High Performance Heating (UK) | TBC                     | TBC                   | TBC                 | TBC                   | TBC                                       | TBC                                       |
|  | COP Priority Heating (UK)     | TBC                     | TBC                   | TBC                 | TBC                   | TBC                                       | TBC                                       |
|  | Cooling (UK)                  | TBC                     | TBC                   | TBC                 | TBC                   | TBC                                       | TBC                                       |
| POWER INPUT (kW)   | Heating (Max)                 | 16.66                   | 13.78                 | 17.41               | 16.11                 | 17.92                                     | 19.84                                     |
|  | Cooling (nominal)             | 15.47                   | 13.44                 | 19.71               | 16.00                 | 17.67                                     | 19.36                                     |
|  | High Performance Heating (UK) | TBC                     | TBC                   | TBC                 | TBC                   | TBC                                       | TBC                                       |
|  | COP Priority Heating (UK)     | TBC                     | TBC                   | TBC                 | TBC                   | TBC                                       | TBC                                       |
|  | Cooling (UK)                  | TBC                     | TBC                   | TBC                 | TBC                   | TBC                                       | TBC                                       |
| COP / EER (Max/Nominal)  |                               | 3.36 / 3.23             | 4.10 / 3.75           | 3.33 / 2.84         | 3.91 / 3.50           | 3.85 / 3.48                               | 3.78 / 3.46                               |
| SCOP / SEER  |                               | 4.45 / 7.43             | 4.67 / 7.47           | 4.35 / 7.00         | 4.66 / 7.39           | 4.66 / 7.40                               | 4.66 / 7.54                               |
| MAX NO. OF CONNECTABLE INDOOR UNITS  |                               | 33                      | 33                    | 36                  | 36                    | 40  | 44  |
| MAX CONNECTABLE CAPACITY   |                               | 50~150% OU Capacity     | 50~150% OU Capacity   | 50~150% OU Capacity | 50~150% OU Capacity   | 50~150% OU Capacity                       | 50~150% OU Capacity                       |
| AIRFLOW (m³/min)   | High                          | 300                     | 180 / 170             | 305                 | 180 / 180             | 235 / 180                                 | 235 / 235                                 |
|  | Gas                           | 28.58 (1-1/8")          | 28.58 (1-1/8")        | 28.58 (1-1/8")      | 28.58 (1-1/8")        | 28.58 (1-1/8")                            | 28.58 (1-1/8")                            |
| PIPE SIZE mm (in)  | Liquid                        | 22.2 (7/8")             | 22.2 (7/8")           | 22.2 (7/8")         | 22.2 (7/8")           | 22.2 (7/8") / 28.58 (1-1/8") <sup>1</sup> | 22.2 (7/8") / 28.58 (1-1/8") <sup>1</sup> |
|  | Heating / Cooling             | 68.0 / 63.0             | 61.0 / 60.0           | 69.5 / 67.5         | 62.0 / 60.0           | 65.0 / 62.0                               | 67.0 / 64.0                               |
| SOUND POWER LEVEL (dba) @ 1m   |                               | 89.0 / 83.0             | 82.0 / 80.0           | 91.0 / 87.0         | 83.0 / 82.0           | 85.0 / 83.0                               | 87.0 / 84.0                               |
| SOUND POWER LEVEL (dba) @ 100% Capacity  |                               | TBC                     | TBC                   | TBC                 | TBC                   | TBC                                       | TBC                                       |
| SOUND POWER LEVEL (dba) @ 90% Capacity   |                               | TBC                     | TBC                   | TBC                 | TBC                   | TBC                                       | TBC                                       |
| SOUND POWER LEVEL (dba) @ 75% Capacity   |                               | TBC                     | TBC                   | TBC                 | TBC                   | TBC                                       | TBC                                       |
| WEIGHT (kg)  |                               | 327                     | 265 + 265             | 327                 | 265 + 265             | 266 + 265                                 | 266 + 266                                 |
| DIMENSIONS (mm)  | Width                         | 1207                    | 910 + 910             | 1207                | 910 + 910             | 910 + 910                                 | 910 + 910                                 |
|  | Depth                         | 740                     | 740                   | 740                 | 740                   | 740                                       | 740                                       |
|  | Height                        | 1858                    | 1858                  | 1858                | 1858                  | 1858                                      | 1858                                      |
| (1798mm without legs)  |                               |                         |                       |                     |                       |   |   |
| ELECTRICAL SUPPLY <sup>2</sup>   |                               | 380-415v, 50Hz          | 380-415v, 50Hz        | 380-415v, 50Hz      | 380-415v, 50Hz        | 380-415v, 50Hz                            | 380-415v, 50Hz                            |
| PHASE <sup>2</sup>   |                               | Three                   | Three                 | Three               | Three                 | Three                                     | Three                                     |
| STARTING CURRENT (A) <sup>2</sup>  |                               | TBC                     | TBC                   | TBC                 | TBC                   | TBC                                       | TBC                                       |
| NOMINAL SYSTEM RUNNING CURRENT (A) <sup>2</sup>                                |                               | Heating / Cooling [MAX] | 26.7 / 24.8 [TBC]     | 22.0 / 21.5 [TBC]   | 27.9 / 31.6 [TBC]     | 28.7 / 28.3 [TBC]                         | 31.8 / 31.0 [TBC]                         |
| GUARANTEED OPERATING RANGE (°C)  |                               | Heating / Cooling       | -25~-15.5 / -5~-52    | -25~-15.5 / -5~-52  | -25~-15.5 / -5~-52    | -25~-15.5 / -5~-52                        | -25~-15.5 / -5~-52                        |
| FUSE RATING (MCB sizes BS EN 60947-2) - (A) <sup>2</sup>                       |                               | TBC                     | TBC                   | TBC                 | TBC                   | TBC                                       | TBC                                       |
| MAINS CABLE No. Cores <sup>2</sup>   |                               | 4 + earth               | 4 + earth / 4 + earth | 4 + earth           | 4 + earth / 4 + earth | 4 + earth                                 | 4 + earth / 4 + earth                     |
| CHARGE REFRIGERANT (kg) / CO <sub>2</sub> EQUIVALENT (t) R32 (GWP 678)         |                               | 9.3 / 6.3               | 16.0 / 10.8           | 9.3 / 6.3           | 16.0 / 10.8           | 16.0 / 10.8                               | 16.0 / 10.8                               |
| MAX ADDITIONAL REFRIGERANT (kg) / CO <sub>2</sub> EQUIVALENT (t) R32 (GWP 678) |                               | TBC                     | TBC                   | TBC                 | TBC                   | TBC                                       | TBC                                       |

Notes: ErP Lot 6 calculation method to EN14825. \*1 If distance from OU to BC controller is greater than 65m. \*2 A separate power supply is required for each module. Where more than one figure is quoted there are multiple modules.

### PURY-M450/500YXM-A DIMENSIONS

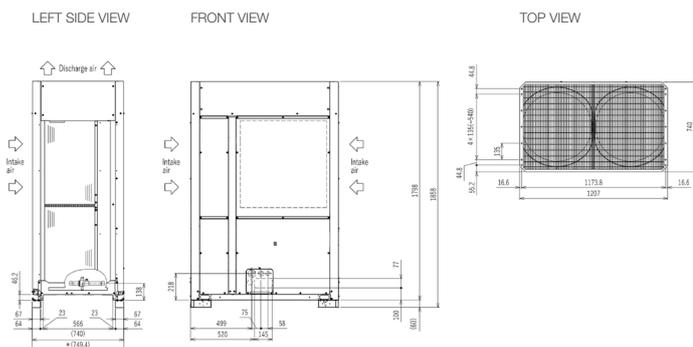

### PURY-M450/500/550/600YSXM-A DIMENSIONS

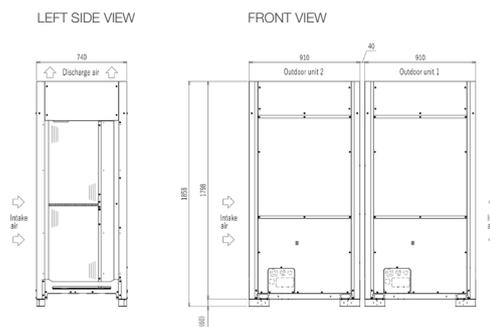

Telephone: 01707 282880  
 email: [air.conditioning@meuk.mee.com](mailto:air.conditioning@meuk.mee.com)  
[les.mitsubishielectric.co.uk](http://les.mitsubishielectric.co.uk)



UNITED KINGDOM Mitsubishi Electric Europe Living Environment Systems Division, Travellers Lane, Hatfield, Hertfordshire, AL10 8XB, England. Telephone: 01707 282880  
 IRELAND Mitsubishi Electric Europe, Plunkett House, Grange Castle Business Park, Nangor Road, Dublin 22, Ireland. Telephone: (00353) 1 4198800 Email: [sales.info@meir.mee.com](mailto:sales.info@meir.mee.com) Web: [les.mitsubishielectric.ie](http://les.mitsubishielectric.ie)

Country of origin: United Kingdom - Italy - Turkey - Japan - Thailand - Malaysia. ©Mitsubishi Electric Europe 2025. Mitsubishi and Mitsubishi Electric are trademarks of Mitsubishi Electric Europe B.V. The company reserves the right to make any variation in technical specification to the equipment described, or to withdraw or replace products without prior notification or public announcement. Mitsubishi Electric is constantly developing and improving its products. All descriptions, illustrations, drawings and specifications in this publication present only general particulars and shall not form part of any contract. All goods are supplied subject to the Company's General Conditions of Sale, a copy of which is available on request. Third-party product and brand names may be trademarks or registered trademarks of their respective owners.

Note: The fuse rating is for guidance only and please refer to the relevant databook for detailed specification. It is the responsibility of a qualified electrician/electrical engineer to select the correct cable size and fuse rating based on current regulation and site specific conditions. Mitsubishi Electric's air conditioning equipment and heat pump systems contain a fluorinated greenhouse gas, R410A (GWP:2088), R32 (GWP:675), R407C (GWP:1774), R134a (GWP:1430), R513A (GWP:631), R454B (GWP:466), R515B (GWP:292), R454C (GWP:148), R1234ze (GWP:7) or R1234yf (GWP:4). \*These GWP values are based on Regulation (EU) No 517/2014 from IPCC 4th edition. Mitsubishi Electric's air conditioning equipment and heat pump systems contain a hydrocarbon, R290 (GWP:0.02). \*These GWP values are based on IPCC 6th edition.

Effective as of December 2025



# R2 Series Standard Efficiency Heat Recovery (73.5-100kW)



Many buildings require heating and cooling simultaneously, even between adjacent rooms. The **City Multi R2 Heat Recovery system** efficiently redistributes surplus heat where it's needed, delivering up to 30% energy savings over conventional systems.

As the only 2-pipe heat recovery solution on the market, the modular City Multi R2 range simplifies installation and maintenance while offering complete design flexibility for applications such as hotels, offices, and leisure spaces.



## Key Features & Benefits:

- **Heat Recovery Operation** - Delivers up to 30% energy savings compared to heat pump systems through advanced heat recovery
- **Lower GWP R32 Refrigerant** - for reduced carbon impact and future-ready legislation compliance
- **Simultaneous Heating & Cooling** - Meets diverse comfort needs across different zones at the same time for optimal occupant satisfaction
- **Unique 2-Pipe System** - Simplifies installation and maintenance while reducing system complexity
- **Ultra-Compact Modular Design** - Smaller unit footprint allows installation in tight spaces without compromising on performance
- **Broad Indoor Unit Compatibility** - Connects to a wide range of unit types and capacities, making it suitable for varied building applications
- **Extended Heating Range (-25°C)** - Ensures reliable heating even in severe winter conditions by maintaining efficient system operation
- **Easy-to-Maintain Safety Feature Options** - For reduced onsite time and costs while supporting occupant peace of mind
- **Enhanced Defrost Technology** - Reduces system downtime during defrost cycles, minimising temperature fluctuations and maintaining reliable indoor heating for consistent occupant comfort
- **Low Noise Operation** - Features a 5-step low noise mode that minimises sound levels for quieter surroundings
- **113m Vertical Height Separation** - Offers generous height allowance between indoor and outdoor units, enabling design flexibility in larger buildings







| PURY-M-Y(S)XM-A OUTDOOR UNITS  |                               | PURY-M650YSXM-A         | PURY-M700YSXM-A       | PURY-M750YSXM-A       | PURY-M800YSXM-A       | PURY-M850YSXM-A       | PURY-M900YSXM-A       |
|--|-------------------------------|-------------------------|-----------------------|-----------------------|-----------------------|-----------------------|-----------------------|
| CAPACITY (kW)  | Heating (Max)                 | 82.50                   | 90.00                 | 95.0                  | 100.0                 | 106.0                 | 112.0                 |
|  | Cooling (nominal)             | 73.50                   | 80.0                  | 85.0                  | 90.0                  | 95.00                 | 100.00                |
|  | High Performance Heating (UK) | TBC                     | TBC                   | TBC                   | TBC                   | TBC                   | TBC                   |
|  | COP Priority Heating (UK)     | TBC                     | TBC                   | TBC                   | TBC                   | TBC                   | TBC                   |
|  | Cooling (UK)                  | TBC                     | TBC                   | TBC                   | TBC                   | TBC                   | TBC                   |
| POWER INPUT (kW)   | Heating (Max)                 | 22.85                   | 26.08                 | 27.53                 | 28.98                 | 31.64                 | 34.46                 |
|  | Cooling (nominal)             | 21.87                   | 23.80                 | 25.67                 | 27.60                 | 29.59                 | 31.94                 |
|  | High Performance Heating (UK) | TBC                     | TBC                   | TBC                   | TBC                   | TBC                   | TBC                   |
|  | COP Priority Heating (UK)     | TBC                     | TBC                   | TBC                   | TBC                   | TBC                   | TBC                   |
|  | Cooling (UK)                  | TBC                     | TBC                   | TBC                   | TBC                   | TBC                   | TBC                   |
| COP / EER (Max/Nominal)  |                               | 3.61 / 3.36             | 3.45 / 3.36           | 3.45 / 3.31           | 3.45 / 3.26           | 3.35 / 3.21           | 3.25 / 3.13           |
| SCOP / SEER  |                               | 4.68 / 7.60             | 4.71 / 7.78           | 4.63 / 7.59           | 4.56 / 7.40           | 4.50 / 7.36           | 4.45 / 7.30           |
| MAX NO. OF CONNECTABLE INDOOR UNITS  |                               | 47                      | 50                    | 50                    | 50                    | 50                    | 50                    |
| MAX CONNECTABLE CAPACITY   |                               | 50~150% OU Capacity     | 50~150% OU Capacity   | 50~150% OU Capacity   | 50~150% OU Capacity   | 50~150% OU Capacity   | 50~150% OU Capacity   |
| AIRFLOW (m³/min)   | High                          | 220 / 235               | 220 / 220             | 260 / 220             | 260 / 260             | 300 / 260             | 300 / 300             |
|  | Gas                           | 28.58 (1-1/8")          | 34.93 (1-3/8")        | 34.93 (1-3/8")        | 34.93 (1-3/8")        | 41.28 (1-5/8")        | 41.28 (1-5/8")        |
| PIPE SIZE mm (in)  | Liquid                        | 28.58 (1-1/8")          | 28.58 (1-1/8")        | 28.58 (1-1/8")        | 28.58 (1-1/8")        | 28.58 (1-1/8")        | 28.58 (1-1/8")        |
|  | Heating / Cooling             | 67.0 / 63.0             | 67.0 / 61.0           | 67.0 / 63.0           | 68.0 / 65.0           | 70.0 / 66.0           | 72.0 / 67.0           |
| SOUND POWER LEVEL (dBa) @ 1m   |                               | 67.0 / 63.0             | 67.0 / 61.0           | 67.0 / 63.0           | 68.0 / 65.0           | 70.0 / 66.0           | 72.0 / 67.0           |
| SOUND POWER LEVEL (dBa) @ 100% Capacity  |                               | 86.0 / 83.0             | 86.0 / 82.0           | 88.0 / 84.0           | 90.0 / 86.0           | 91.0 / 86.0           | 93.0 / 87.0           |
| SOUND POWER LEVEL (dBa) @ 90% Capacity   |                               | TBC                     | TBC                   | TBC                   | TBC                   | TBC                   | TBC                   |
| SOUND POWER LEVEL (dBa) @ 75% Capacity   |                               | TBC                     | TBC                   | TBC                   | TBC                   | TBC                   | TBC                   |
| WEIGHT (kg)  |                               | 322 + 266               | 322 + 322             | 327 + 322             | 327 + 327             | 327 + 327             | 327 + 327             |
| DIMENSIONS (mm)  | Width                         | 910 + 1207              | 1207 + 1207           | 1207 + 1207           | 1207 + 1207           | 1207 + 1207           | 1207 + 1207           |
|  | Depth                         | 740                     | 740                   | 740                   | 740                   | 740                   | 740                   |
|  | Height                        | 1858                    | 1858                  | 1858                  | 1858                  | 1858                  | 1858                  |
| (1798mm without legs)  |                               |                         |                       |                       |                       |                       |                       |
| ELECTRICAL SUPPLY <sup>2</sup>   |                               | 380-415v, 50Hz          | 380-415v, 50Hz        | 380-415v, 50Hz        | 380-415v, 50Hz        | 380-415v, 50Hz        | 380-415v, 50Hz        |
| PHASE <sup>2</sup>   |                               | Three                   | Three                 | Three                 | Three                 | Three                 | Three                 |
| STARTING CURRENT (A) <sup>2</sup>  |                               | TBC                     | TBC                   | TBC                   | TBC                   | TBC                   | TBC                   |
| NOMINAL SYSTEM RUNNING CURRENT (A) <sup>2</sup>                                |                               | Heating / Cooling [MAX] | 36.6 / 35.0 [TBC]     | 41.8 / 38.1 [TBC]     | 44.1 / 41.1 [TBC]     | 46.4 / 44.2 [TBC]     | 50.7 / 47.4 [TBC]     |
| GUARANTEED OPERATING RANGE (°C)  |                               | Heating / Cooling       | -25~-15.5 / -5~-52    | -25~-15.5 / -5~-52    | -25~-15.5 / -5~-52    | -25~-15.5 / -5~-52    | -25~-15.5 / -5~-52    |
| FUSE RATING (MCB sizes BS EN 60947-2) - (A) <sup>2</sup>                       |                               | TBC                     | TBC                   | TBC                   | TBC                   | TBC                   | TBC                   |
| MAINS CABLE No. Cores <sup>2</sup>   |                               | 4 + earth / 4 + earth   | 4 + earth / 4 + earth | 4 + earth / 4 + earth | 4 + earth / 4 + earth | 4 + earth / 4 + earth | 4 + earth / 4 + earth |
| CHARGE REFRIGERANT (kg) / CO <sub>2</sub> EQUIVALENT (t) R32 (GWP 675)         |                               | 17.3 / 11.7             | 18.6 / 12.6           | 18.6 / 12.6           | 18.6 / 12.6           | 18.6 / 12.6           | 18.6 / 12.6           |
| MAX ADDITIONAL REFRIGERANT (kg) / CO <sub>2</sub> EQUIVALENT (t) R32 (GWP 675) |                               | TBC                     | TBC                   | TBC                   | TBC                   | TBC                   | TBC                   |

Notes: ErP Lot 6 calculation method to EN14825. \*1 If distance from OU to BC controller is greater than 65m. \*2 A separate power supply is required for each module. Where more than one figure is quoted there are multiple modules.

### PURY-M650YSXM-A DIMENSIONS

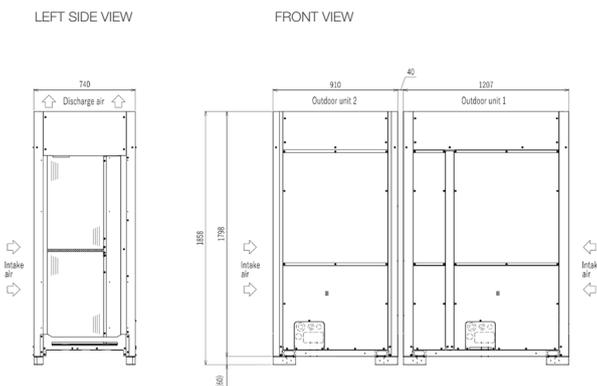

### PURY-M700/750/800/850/900YSXM-A DIMENSIONS

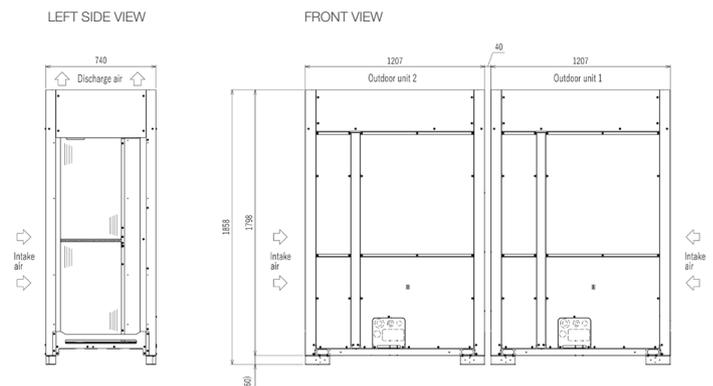

Telephone: 01707 282880  
 email: [air.conditioning@meuk.mee.com](mailto:air.conditioning@meuk.mee.com)  
[les.mitsubishielectric.co.uk](http://les.mitsubishielectric.co.uk)



UNITED KINGDOM Mitsubishi Electric Europe Living Environment Systems Division, Travellers Lane, Hatfield, Hertfordshire, AL10 8XB, England. Telephone: 01707 282880  
 IRELAND Mitsubishi Electric Europe, Plunkett House, Grange Castle Business Park, Nangor Road, Dublin 22, Ireland. Telephone: (00353) 1 4198800 Email: [sales.info@meir.mee.com](mailto:sales.info@meir.mee.com) Web: [les.mitsubishielectric.ie](http://les.mitsubishielectric.ie)

Country of origin: United Kingdom - Italy - Turkey - Japan - Thailand - Malaysia. ©Mitsubishi Electric Europe 2025. Mitsubishi and Mitsubishi Electric are trademarks of Mitsubishi Electric Europe B.V. The company reserves the right to make any variation in technical specification to the equipment described, or to withdraw or replace products without prior notification or public announcement. Mitsubishi Electric is constantly developing and improving its products. All descriptions, illustrations, drawings and specifications in this publication present only general particulars and shall not form part of any contract. All goods are supplied subject to the Company's General Conditions of Sale, a copy of which is available on request. Third-party product and brand names may be trademarks or registered trademarks of their respective owners.

Note: The fuse rating is for guidance only and please refer to the relevant databook for detailed specification. It is the responsibility of a qualified electrician/electrical engineer to select the correct cable size and fuse rating based on current regulation and site specific conditions. Mitsubishi Electric's air conditioning equipment and heat pump systems contain a fluorinated greenhouse gas, R410A (GWP:2088), R32 (GWP:675), R407C (GWP:1774), R134a (GWP:1430), R513A (GWP:631), R454B (GWP:466), R515B (GWP:292), R454C (GWP:148), R1234ze (GWP:7) or R1234yf (GWP:4). \*These GWP values are based on Regulation (EU) No 517/2014 from IPCC 4th edition. Mitsubishi Electric's air conditioning equipment and heat pump systems contain a hydrocarbon, R290 (GWP:0.02). \*These GWP values are based on IPCC 6th edition.

Effective as of December 2025



# R2 Series Standard Efficiency Heat Recovery (106-112kW)



Many buildings require heating and cooling simultaneously, even between adjacent rooms. The **City Multi R2 Heat Recovery system** efficiently redistributes surplus heat where it's needed, delivering up to 30% energy savings over conventional systems.

As the only 2-pipe heat recovery solution on the market, the modular City Multi R2 range simplifies installation and maintenance while offering complete design flexibility for applications such as hotels, offices, and leisure spaces.

## Key Features & Benefits:

- **Heat Recovery Operation** - Delivers up to 30% energy savings compared to heat pump systems through advanced heat recovery
- **Lower GWP R32 Refrigerant** - for reduced carbon impact and future-ready legislation compliance
- **Simultaneous Heating & Cooling** - Meets diverse comfort needs across different zones at the same time for optimal occupant satisfaction
- **Unique 2-Pipe System** - Simplifies installation and maintenance while reducing system complexity
- **Ultra-Compact Modular Design** - Smaller unit footprint allows installation in tight spaces without compromising on performance
- **Broad Indoor Unit Compatibility** - Connects to a wide range of unit types and capacities, making it suitable for varied building applications
- **Extended Heating Range (-25°C)** - Ensures reliable heating even in severe winter conditions by maintaining efficient system operation
- **Easy-to-Maintain Safety Feature Options** - For reduced onsite time and costs while supporting occupant peace of mind
- **Enhanced Defrost Technology** - Reduces system downtime during defrost cycles, minimising temperature fluctuations and maintaining reliable indoor heating for consistent occupant comfort
- **Low Noise Operation** - Features a 5-step low noise mode that minimises sound levels for quieter surroundings
- **113m Vertical Height Separation** - Offers generous height allowance between indoor and outdoor units, enabling design flexibility in larger buildings






| PURY-M-YSXM-A OUTDOOR UNITS  |                               | PURY-M950YSXM-A       | PURY-M1000YSXM-A      |
|--|-------------------------------|-----------------------|-----------------------|
| CAPACITY (kW)  | Heating (Max)                 | 114.0                 | 116.0                 |
|  | Cooling (nominal)             | 106.0                 | 112.0                 |
|  | High Performance Heating (UK) | TBC                   | TBC                   |
|  | COP Priority Heating (UK)     | TBC                   | TBC                   |
|  | Cooling (UK)                  | TBC                   | TBC                   |
| POWER INPUT (kW)   | Heating (Max)                 | 35.18                 | 35.91                 |
|  | Cooling (nominal)             | 36.05                 | 40.87                 |
|  | High Performance Heating (UK) | TBC                   | TBC                   |
|  | COP Priority Heating (UK)     | TBC                   | TBC                   |
|  | Cooling (UK)                  | TBC                   | TBC                   |
| COP / EER (Max/Nominal)  |                               | 3.24 / 2.94           | 3.23 / 2.74           |
| SCOP / SEER  |                               | 4.40 / 7.08           | 4.35 / 6.86           |
| MAX NO. OF CONNECTABLE INDOOR UNITS  |                               | 50                    | 50                    |
| MAX CONNECTABLE CAPACITY   |                               | 50-150% OU Capacity   | 50-150% OU Capacity   |
| AIRFLOW (m <sup>3</sup> /min)  | High                          | 305 / 300             | 305 / 305             |
| PIPE SIZE mm (in)  | Gas                           | 41.28 (1-5/8")        | 41.28 (1-5/8")        |
|  | Liquid                        | 28.58 (1-1/8")        | 28.58 (1-1/8")        |
| SOUND PRESSURE LEVEL (dBA) @ 1m  | Heating / Cooling             | 72.0 / 69.0           | 73.0 / 71.0           |
| SOUND POWER LEVEL (dBA) @ 100% Capacity  | Heating / Cooling             | 94.0 / 89.0           | 95.0 / 91.0           |
| SOUND POWER LEVEL (dBA) @ 90% Capacity   | Heating / Cooling             | TBC                   | TBC                   |
| SOUND POWER LEVEL (dBA) @ 75% Capacity   | Heating / Cooling             | TBC                   | TBC                   |
| WEIGHT (kg)  |                               | 327 + 327             | 327 + 327             |
| DIMENSIONS (mm)  | Width                         | 1207 + 1207           | 1207 + 1207           |
|  | Depth                         | 740                   | 740                   |
|  | Height                        | 1858                  | 1858                  |
| (1798mm without legs)  |                               |                       |                       |
| ELECTRICAL SUPPLY <sup>*1</sup>  |                               | 380-415v, 50Hz        | 380-415v, 50Hz        |
| PHASE <sup>*1</sup>  |                               | Three                 | Three                 |
| STARTING CURRENT (A) <sup>*1</sup>   |                               | TBC                   | TBC                   |
| NOMINAL SYSTEM RUNNING CURRENT (A) <sup>*1</sup>                               | Heating / Cooling [MAX]       | 56.4 / 57.8 [TBC]     | 57.5 / 65.5 [TBC]     |
| GUARANTEED OPERATING RANGE (°c)  | Heating / Cooling             | -25~-15.5 / -5~-52    | -25~-15.5 / -5~-52    |
| FUZE RATING (MCB sizes BS EN 60947-2) - (A) <sup>*1</sup>                      |                               | TBC                   | TBC                   |
| MAINS CABLE No. Cores <sup>*1</sup>  |                               | 4 + earth / 4 + earth | 4 + earth / 4 + earth |
| CHARGE REFRIGERANT (kg) / CO <sub>2</sub> EQUIVALENT (t) R32 (GWP 675)         |                               | 18.6 / 12.6           | 18.6 / 12.6           |
| MAX ADDITIONAL REFRIGERANT (kg) / CO <sub>2</sub> EQUIVALENT (t) R32 (GWP 675) |                               | TBC                   | TBC                   |

Notes: ErP Lot 6 calculation method to EN14825. \*1 A separate power supply is required for each module. Where more than one figure is quoted there are multiple modules.

**PURY-M950/1000YSXM-A DIMENSIONS**

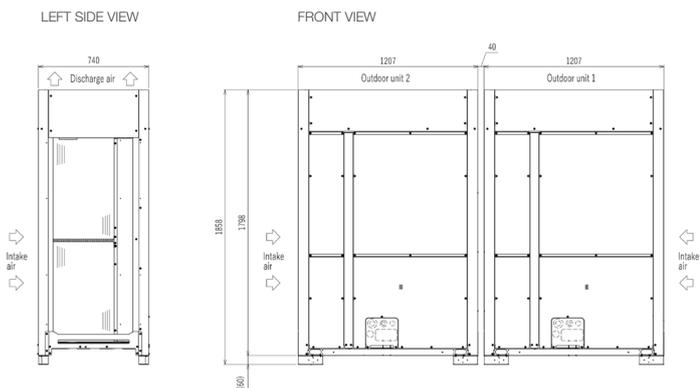

Telephone: 01707 282880  
 email: [air.conditioning@meuk.mee.com](mailto:air.conditioning@meuk.mee.com)  
[les.mitsubishielectric.co.uk](http://les.mitsubishielectric.co.uk)



UNITED KINGDOM Mitsubishi Electric Europe Living Environment Systems Division, Travellers Lane, Hatfield, Hertfordshire, AL10 8XB, England. Telephone: 01707 282880  
 IRELAND Mitsubishi Electric Europe, Plunkett House, Grange Castle Business Park, Nangor Road, Dublin 22, Ireland. Telephone: (00353) 1 4198800 Email: [sales.info@meir.mee.com](mailto:sales.info@meir.mee.com) Web: [les.mitsubishielectric.ie](http://les.mitsubishielectric.ie)

Country of origin: United Kingdom - Italy - Turkey - Japan - Thailand - Malaysia. ©Mitsubishi Electric Europe 2025. Mitsubishi and Mitsubishi Electric are trademarks of Mitsubishi Electric Europe B.V. The company reserves the right to make any variation in technical specification to the equipment described, or to withdraw or replace products without prior notification or public announcement. Mitsubishi Electric is constantly developing and improving its products. All descriptions, illustrations, drawings and specifications in this publication present only general particulars and shall not form part of any contract. All goods are supplied subject to the Company's General Conditions of Sale, a copy of which is available on request. Third-party product and brand names may be trademarks or registered trademarks of their respective owners.

Note: The fuse rating is for guidance only and please refer to the relevant databook for detailed specification. It is the responsibility of a qualified electrician/electrical engineer to select the correct cable size and fuse rating based on current regulation and site specific conditions. Mitsubishi Electric's air conditioning equipment and heat pump systems contain a fluorinated greenhouse gas, R410A (GWP:2088), R32 (GWP:675), R407C (GWP:1774), R134a (GWP:1430), R513A (GWP:631), R454B (GWP:466), R515B (GWP:292), R454C (GWP:148), R1234ze (GWP:7) or R1234yf (GWP:4). \*These GWP values are based on Regulation (EU) No 517/2014 from IPCC 4th edition. Mitsubishi Electric's air conditioning equipment and heat pump systems contain a hydrocarbon, R290 (GWP:0.02). \*These GWP values are based on IPCC 6th edition.

Effective as of December 2025

