


Sub BC Controllers

At the heart of the City Multi R2 Series, the **BC controller** makes simultaneous heating and cooling possible. Improved system efficiency is achieved when energy is transferred intelligently around the building.

R32

Key Features & Benefits:

- **New Heat Recovery Branch Controller** - supporting up to 12 ports with built-in shut-off valves for flexible installation and safety compliance
- **2-Pipe Heat Recovery** - Enables simultaneous heating and cooling with a simplified installation process, whilst meeting diverse comfort needs across different zones at the same time
- **Smart Refrigerant Control** - Directs refrigerant flow to meet each zone's heating and cooling demand, ensuring consistent comfort
- **Compact Design** - 252mm height, perfect for tight ceiling spaces
- **Optional Low Level Leak Detector (PAC-SL72SA-E)** - Provides long service life, easy maintenance and supports compliance and safety regulations
- **Easy Maintenance Access** - Underside drain pan provides convenient access for servicing, reducing maintenance time and costs
- **Brazed Connections** - Reliable, durable connections for long-lasting system integrity and minimal leak risk

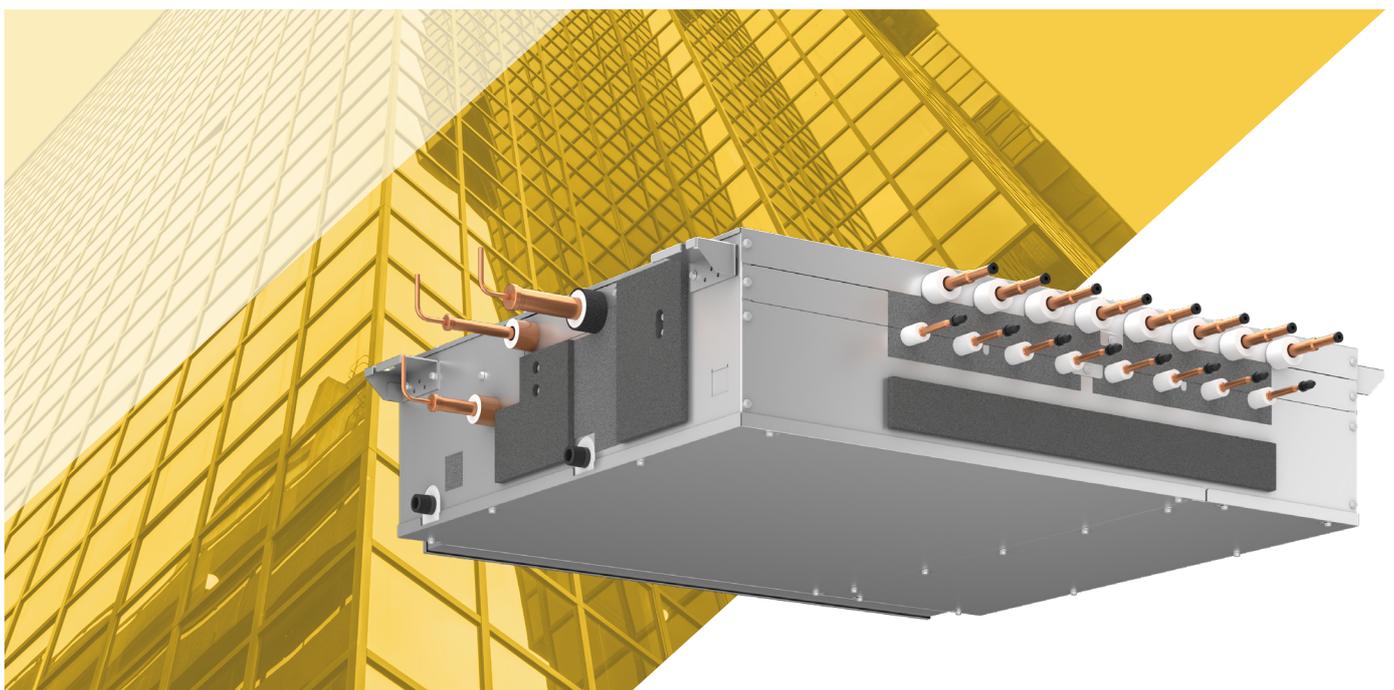


Air Conditioning Product Information



CMB-M-V-MB-SV SLAVE BC CONTROLLERS		CMB-M104V-MB-SV	CMB-M108V-MB-SV
NUMBER OF CONNECTIONS		4	8
WEIGHT (kg)		43	54
DIMENSIONS (mm)	Width	1040	1040
	Depth	880	880
	Height	252	252
ELECTRICAL SUPPLY		220-240v, 50Hz	220-240v, 50Hz
PHASE		Single	Single
POWER INPUT (kW)		0.01	0.01
RUNNING CURRENT (A)		0.05	0.06
FUSE RATING (BS88) - HRC (A)		6	6
MAINS CABLE No. Cores		3	3

CMB-M104V/108-MB-SV DIMENSIONS

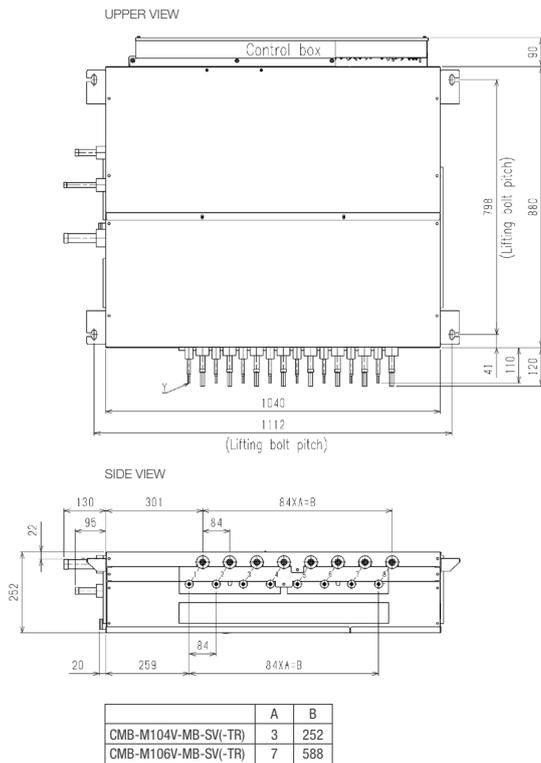

Telephone: 01707 282880
 email: air.conditioning@meuk.mee.com
les.mitsubishielectric.co.uk

- @meuk_les @green_gateway
- Mitsubishi Electric Living Environmental Systems UK
- Mitsubishi Electric Cooling and Heating UK
- mitsubishielectricuk_les
- Mitsubishi Electric Living Environmental Systems UK
- thehub.mitsubishielectric.co.uk

UNITED KINGDOM Mitsubishi Electric Europe Living Environment Systems Division, Travellers Lane, Hatfield, Hertfordshire, AL10 8XB, England. Telephone: 01707 282880
IRELAND Mitsubishi Electric Europe, Plunkett House, Grange Castle Business Park, Nangor Road, Dublin 22, Ireland. Telephone: (00353) 1 4198800 Email: sales.info@meir.mee.com Web: les.mitsubishielectric.ie

Country of origin: United Kingdom - Italy - Turkey - Japan - Thailand - Malaysia. ©Mitsubishi Electric Europe 2025. Mitsubishi and Mitsubishi Electric are trademarks of Mitsubishi Electric Europe B.V. The company reserves the right to make any variation in technical specification to the equipment described, or to withdraw or replace products without prior notification or public announcement. Mitsubishi Electric is constantly developing and improving its products. All descriptions, illustrations, drawings and specifications in this publication present only general particulars and shall not form part of any contract. All goods are supplied subject to the Company's General Conditions of Sale, a copy of which is available on request. Third-party product and brand names may be trademarks or registered trademarks of their respective owners.

Note: The fuse rating is for guidance only and please refer to the relevant databook for detailed specification. It is the responsibility of a qualified electrician/electrical engineer to select the correct cable size and fuse rating based on current regulation and site specific conditions. Mitsubishi Electric's air conditioning equipment and heat pump systems contain a fluorinated greenhouse gas, R410A (GWP:2088), R32 (GWP:675), R407C (GWP:1774), R134a (GWP:1430), R513A (GWP:631), R454B (GWP:466), R515B (GWP:292), R454C (GWP:148), R1234ze (GWP:7) or R1234yf (GWP:4). *These GWP values are based on Regulation (EU) No 517/2014 from IPCC 4th edition. Mitsubishi Electric's air conditioning equipment and heat pump systems contain a hydrocarbon, R290 (GWP:0.02). *These GWP values are based on IPCC 6th edition.

Effective as of December 2025

