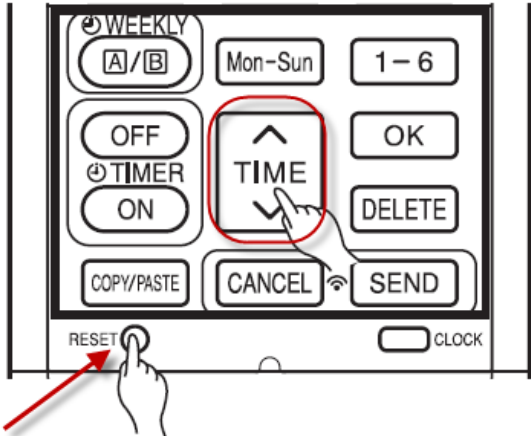
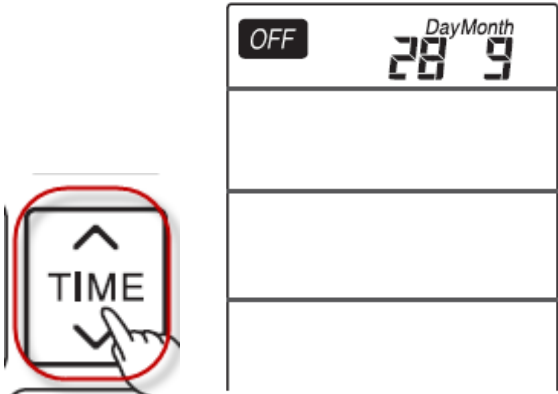
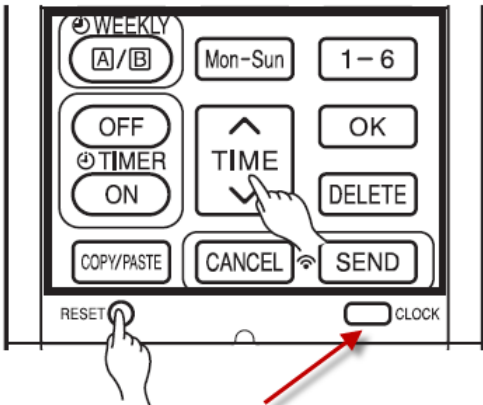


Technical Bulletin




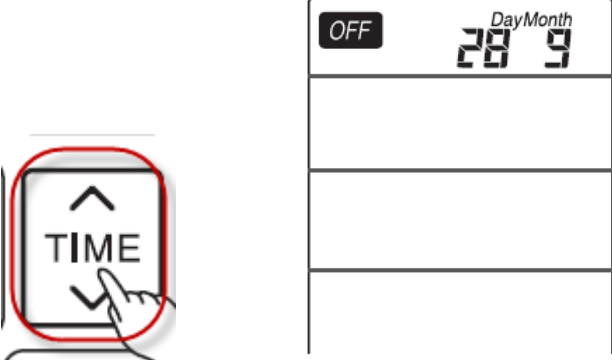
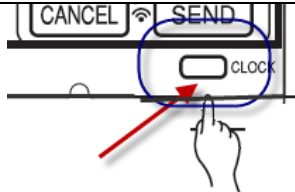
Number	089
Subject	Remote Controller Timeclock settings – RAC 2013
Date	11 September 2013

This is a step-by-step guide to setting up the Clock, Date and Seven-Day Timer on the RAR-P151 remote controller

INITIAL SETTING (THIS IS REQUIRED BEFORE YOU SET SEVEN DAY TIMER)

Instruction	Status
<p>1) Set Date and Time</p> <p>Whether setting for first time or resetting press the RESET button in the bottom left hand corner with a pen nib or similar</p>	
<p>2) Current year will blink.</p> <p>Press TIME button to set current year.</p>	
<p>3) Press "CLOCK" button</p> <p>This is on the bottom right</p> <p>Please push this firmly.</p>	

Technical Bulletin
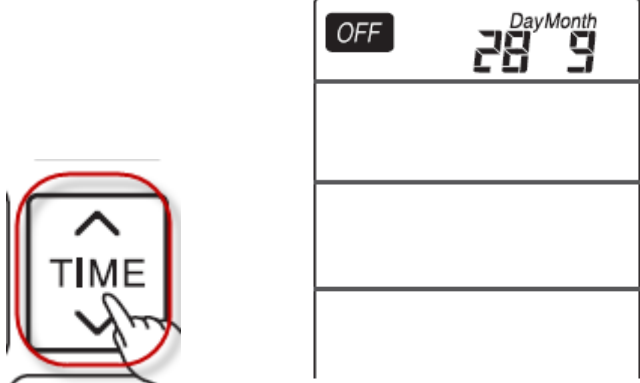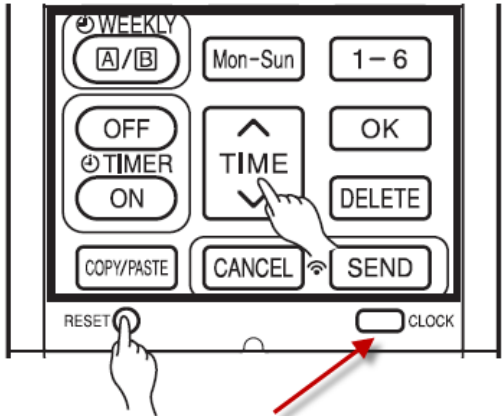
<p>4) Now set the date.</p> <p>Press the TIME button to SCROLL through the dates. You need to set the Month and Year in one go. The controller will scroll from month to month when you press and hold. Do not expect to set date and month separately</p>	
<p>5) Press "CLOCK" button</p> <p>This is on the bottom right</p> <p>Please push this firmly.</p>	
<p>6) "CLOCK" blinks on the screen.</p>	
<p>7) Now set the TIME.</p> <p>Press the TIME button to SCROLL through the 24 HOUR clock. You need to set the Hour and Minute in one go. The controller will scroll through when you press and hold. Do not expect to set hour and minute separately</p>	
<p>5) Press "CLOCK" button one last time. Time and Date are now set.</p>	


SETTING THE SEVEN DAY TIMER.

Note – there is no need to use the WEEKLY B setting unless you are inputting more than 3 settings.

1) Press "**WEEKLY A/WEEKLY B**" for more than **three seconds** to commence setting.


Only use WEEKLY B if you have completed all settings on WEEKLY A

A and  **blink**

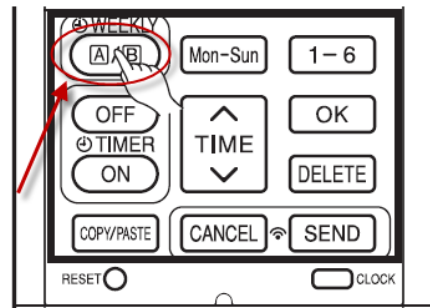

2) The display will read Mon>>Tue etc.

Press the "**MON-SUN**" to select the days. You can select a single day or a group such as MON>>>FRI or MON>>SUN

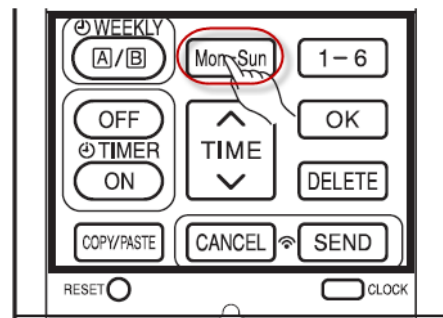


3) Press the "**1-6**" Button to select the reservation number.

Start with "**1**" which will be the default.


IMPORTANT NOTE

RESERVATION 1, 2, 3 etc can only be ONE x ON or OFF TIME





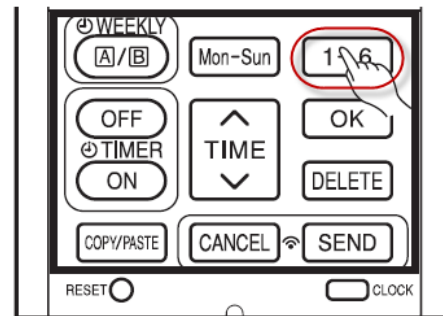


4) Select whether you want your reservation number (1,2,3 etc) to be an **ON TIMER** or an **OFF TIMER**

In most instances, start with an "ON" TIMER

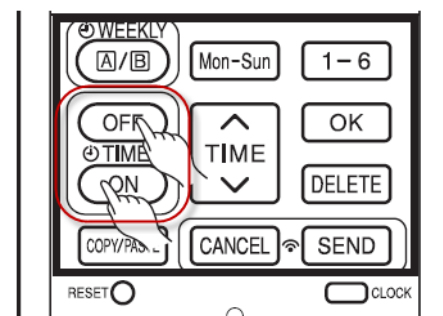

Technical Bulletin
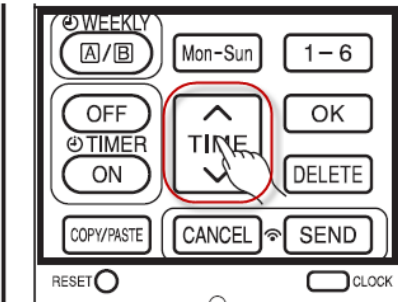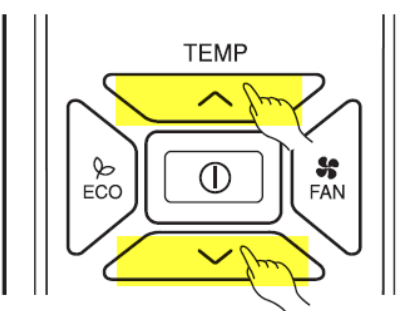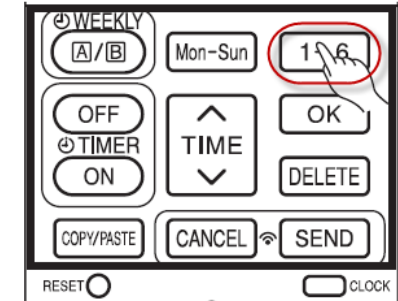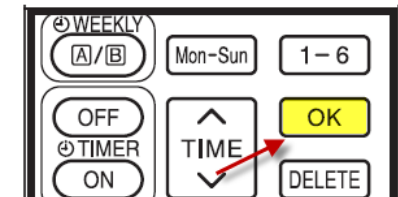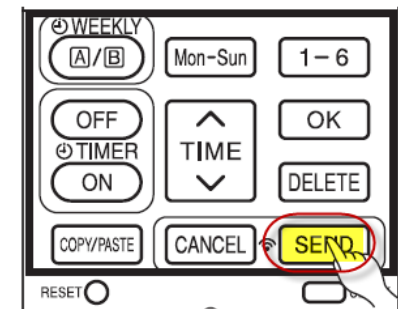
<p>5) Select the time that you want the unit to turn ON or OFF by pressing the TIME button.</p>	
<p>6) When setting on ON TIMER, you can also set the temperature you want the unit to come on at. Use the TEMP UP or DOWN buttons</p>	
<p>7) Assuming you now wish to set an "OFF" or "ON" TIMER for the same days press "1-6" and select number "2"</p> <p>Follow steps 4-6 until you have used all six reservations. You can use WEEKLY B setting if you have more than 6 reservations but this will be very uncommon.</p>	
<p>8) Press the "OK" button when complete</p>	
<p>9) Point the controller at the Indoor Unit. If this is a group of units with a hard wired controller then point it at the unit that the hard wired controller is linked to.</p> <p>Press SEND</p> <p>The TIMER lamp will flash then should stay static.</p>	
<p>10) Should you ever lose the timeclock settings, repeat Step 8. The controller will retain the settings so they just need to be sent to the Indoor Unit again.</p>	